

"rind" covering, showing tie wire embedded surface, and another tie wire being easily em-
Firm "rind" surface is soft enough for easy
g, thus eliminating slow and costly application.



12.

Same block shown in Photograph
Still in one piece and with am-
serve "ductile strength," to per-
and carefree handling. This al-
what happens if Precision N




MCGRAW

STAN
1977

77
80

1977

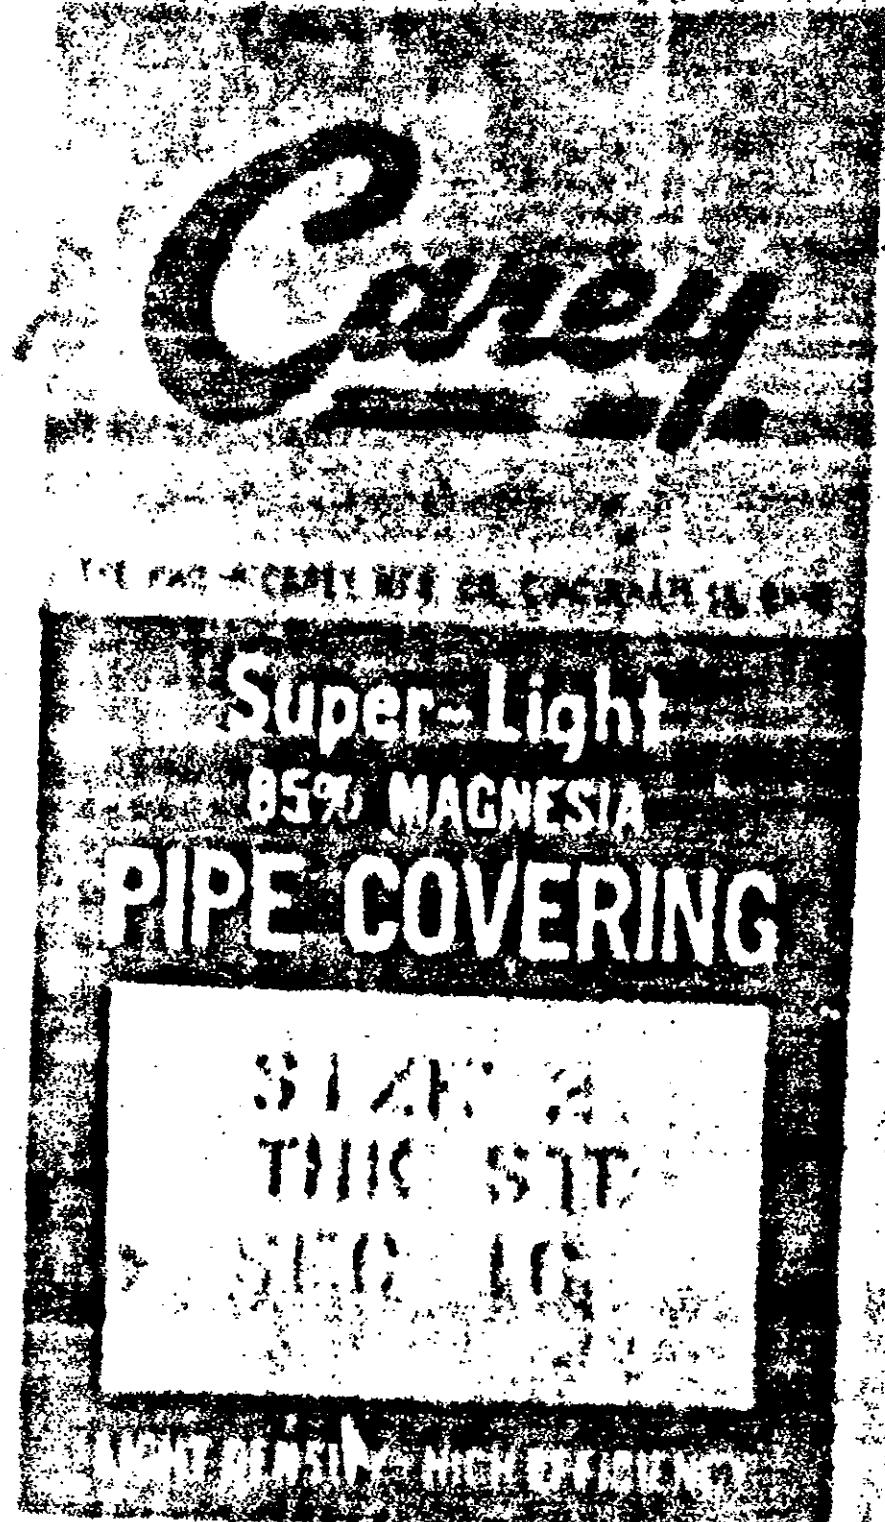



up



OWENS CORNING
FIBERGLAS


Kaylo®-10
1200° F.

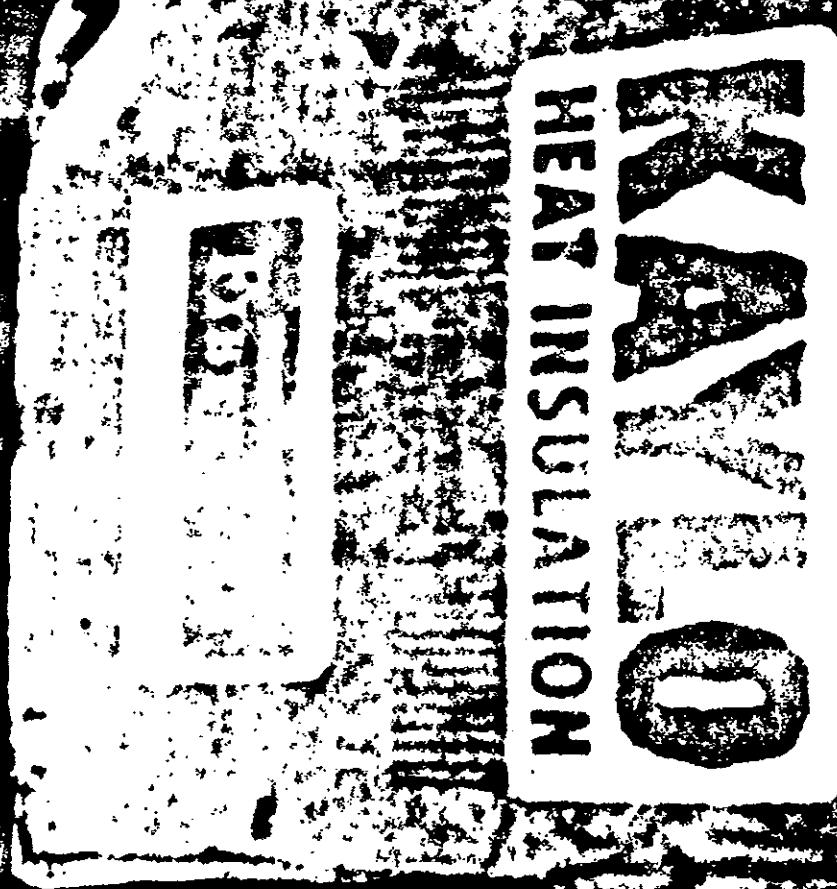

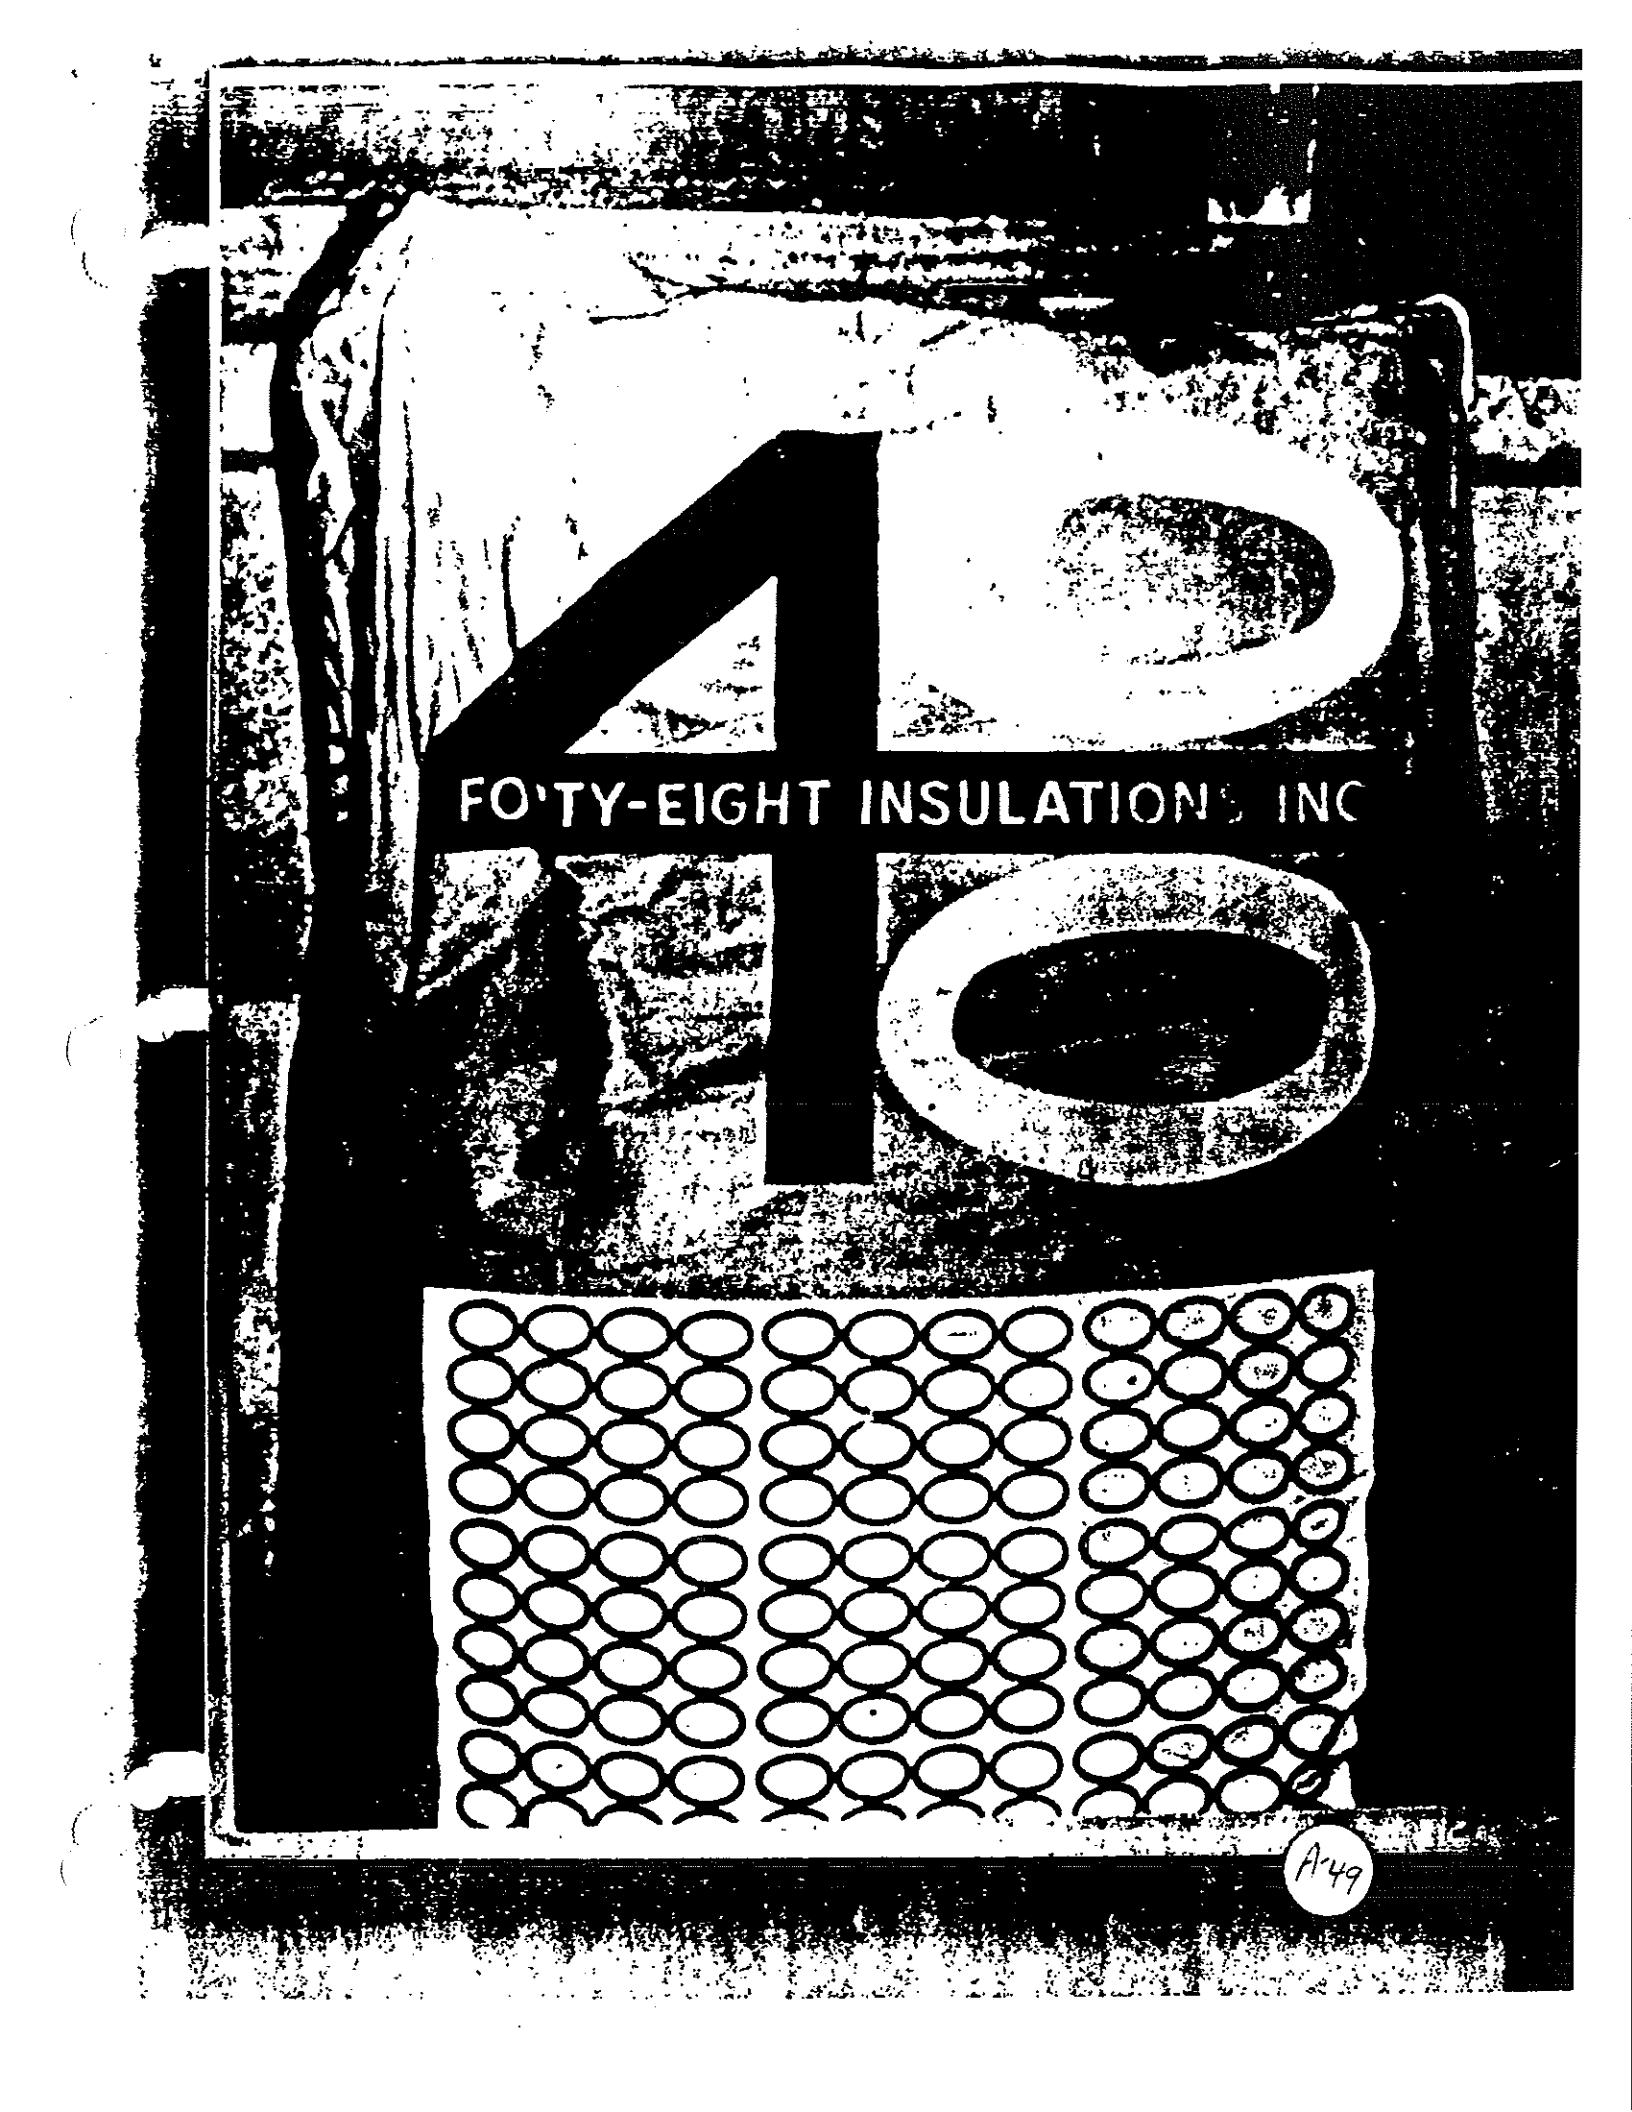


FO' TY-EIGHT INSULATIONS INC

A-49

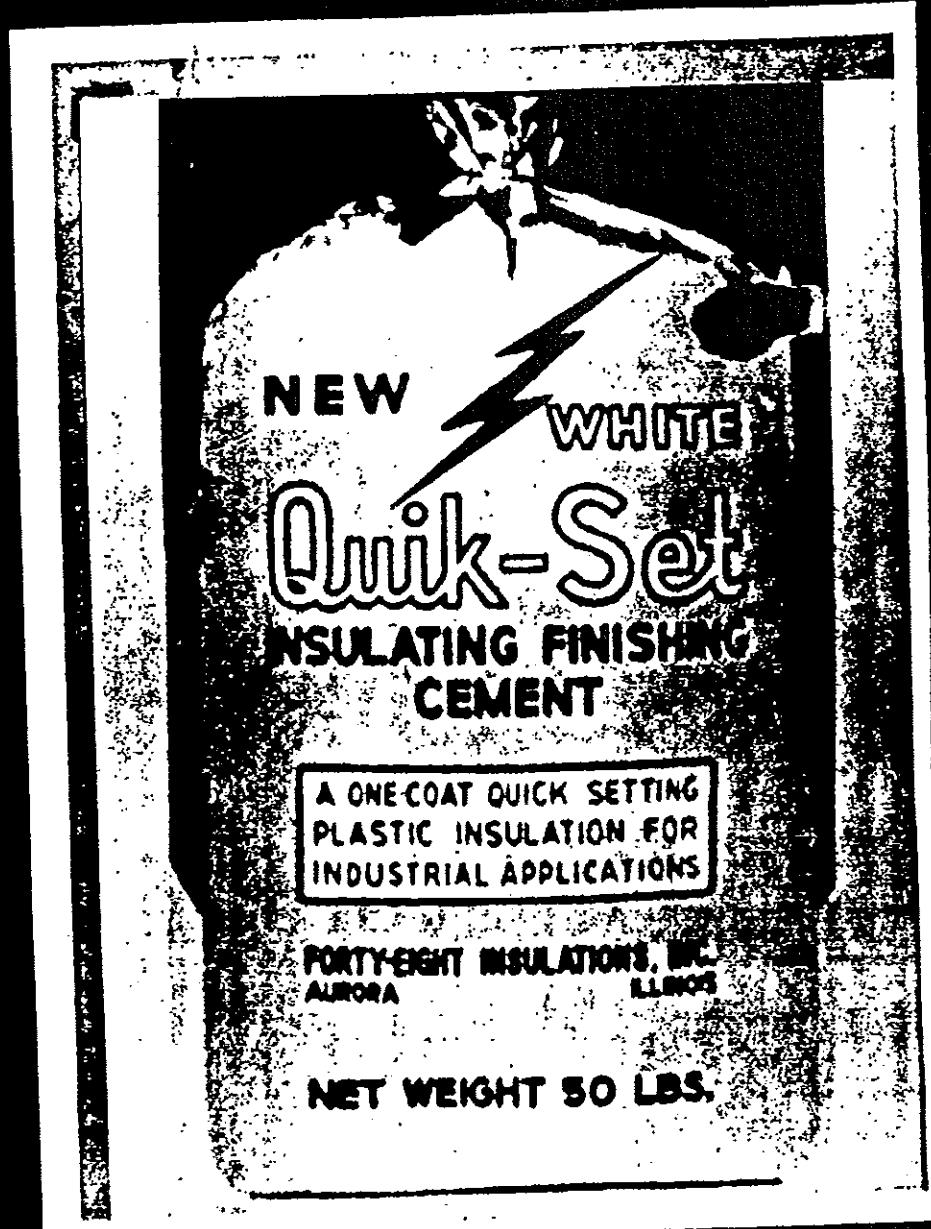

A-47

FP-3

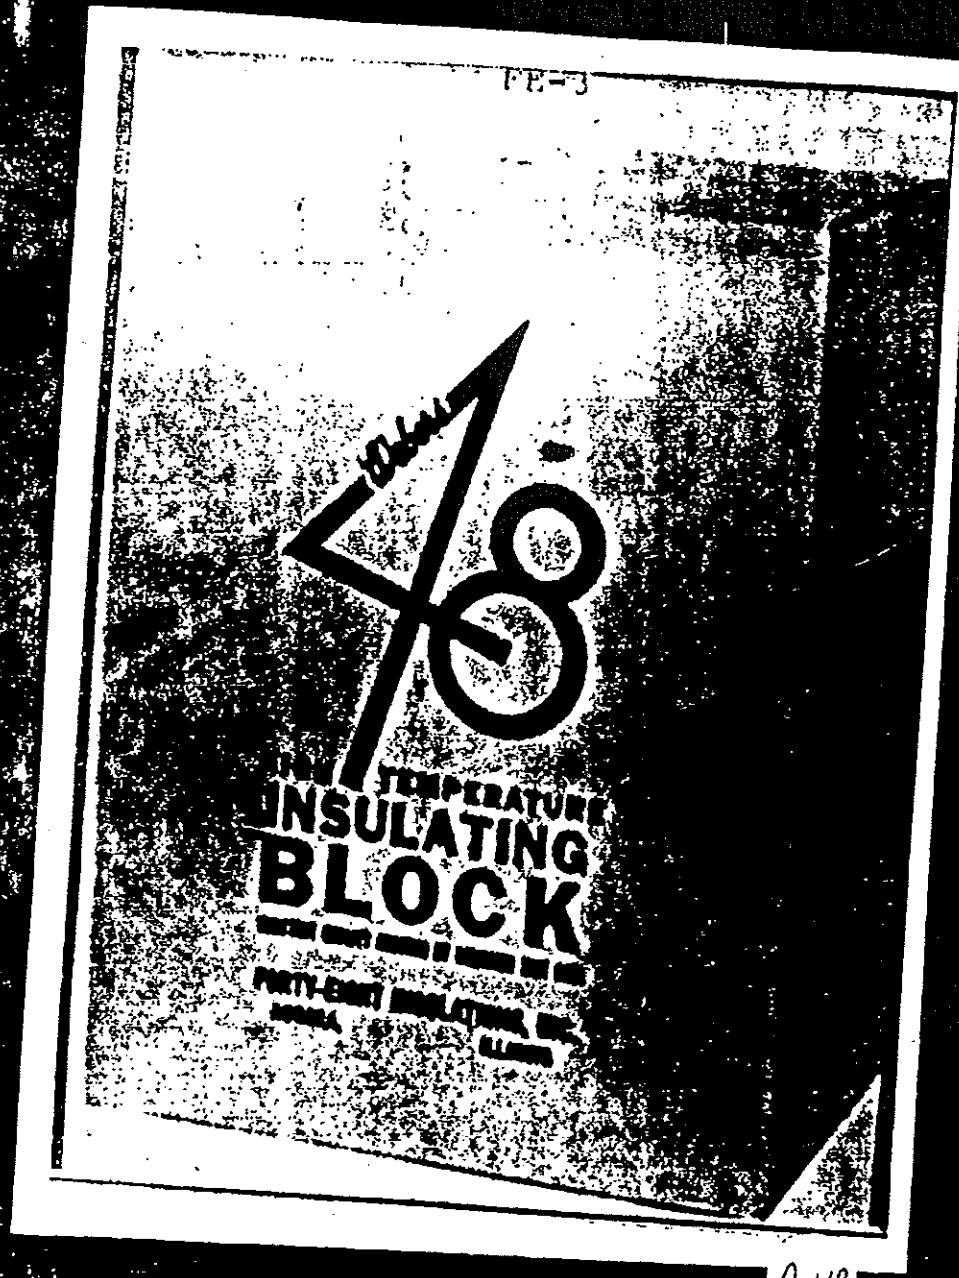

A-48




A-57

Johns-Manville


THERMOBESTOS®
PIPE
INSULATION



A59

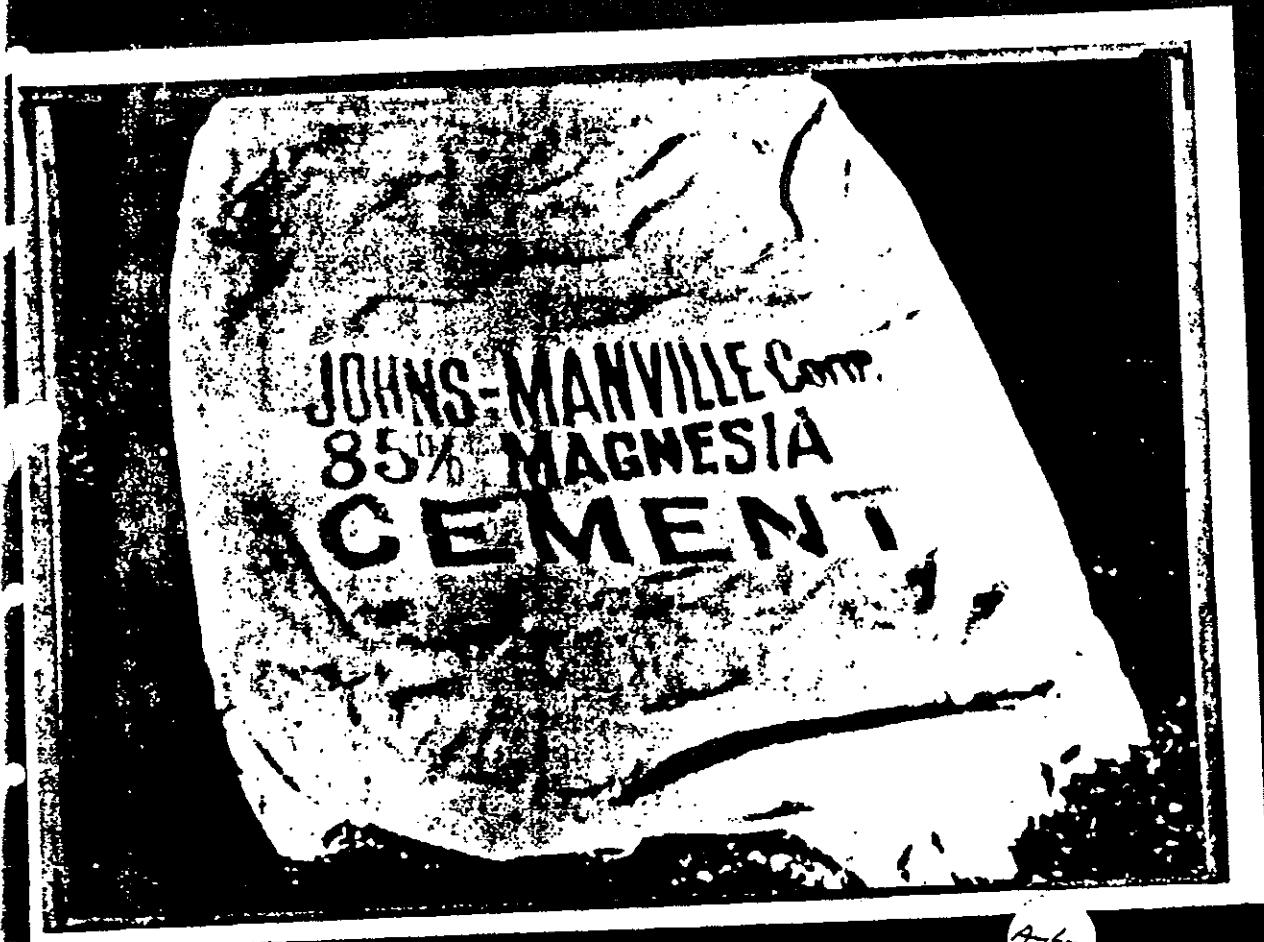

A-60

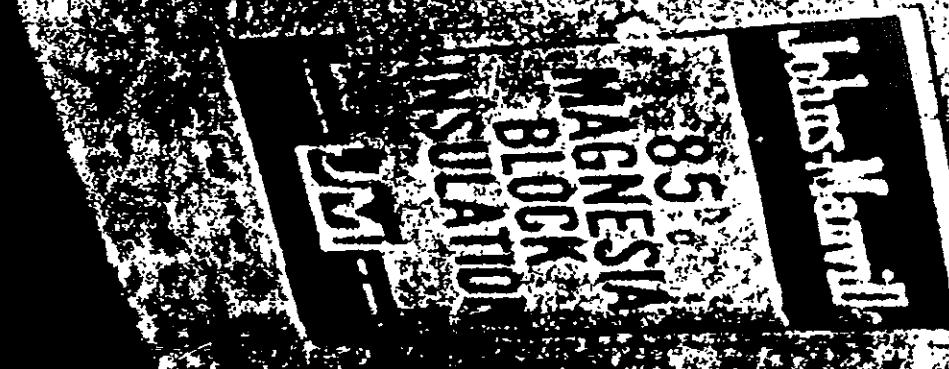

A-62

Johns-Manville

JM


Johns-Manville

Asbestos
TM-13


Use No
Rock or Coal

TM-13

4-63

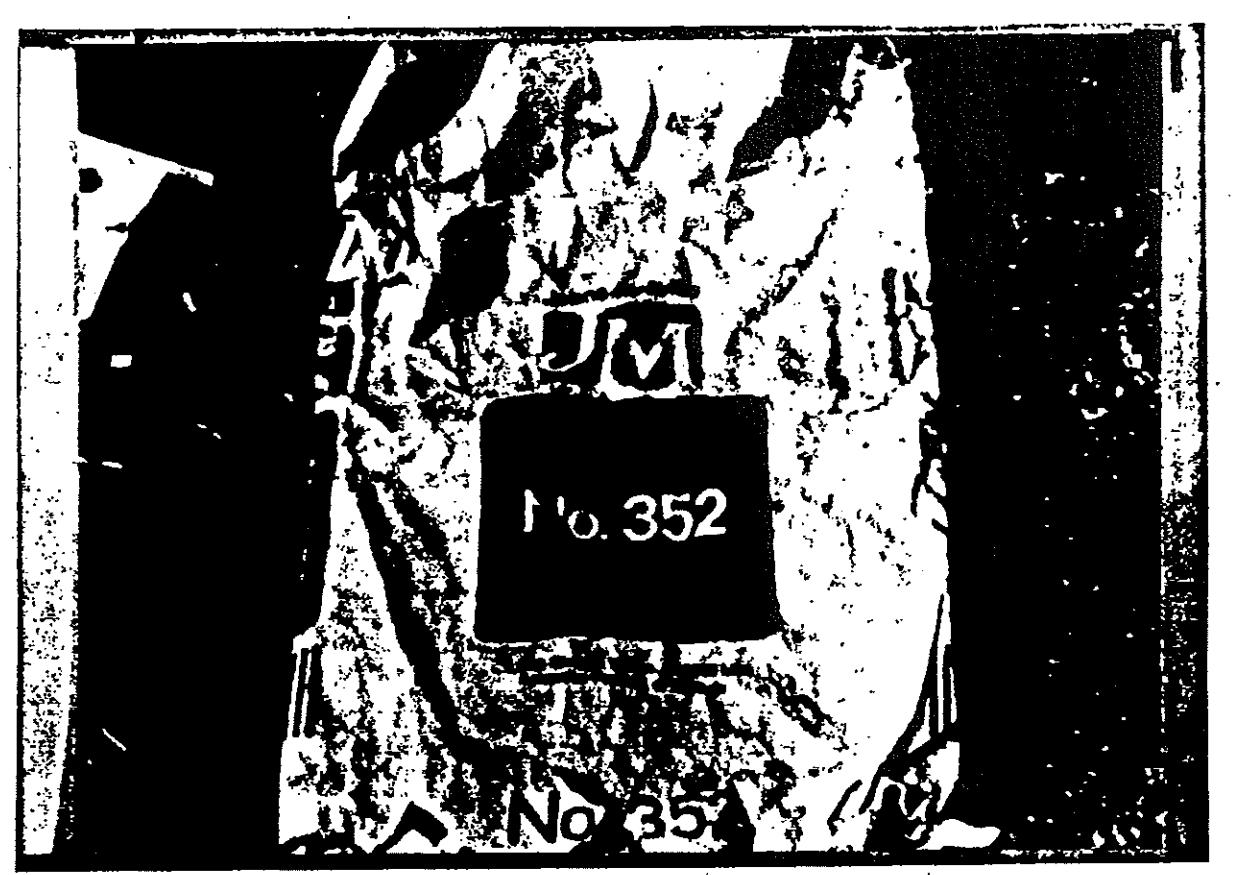

A-64

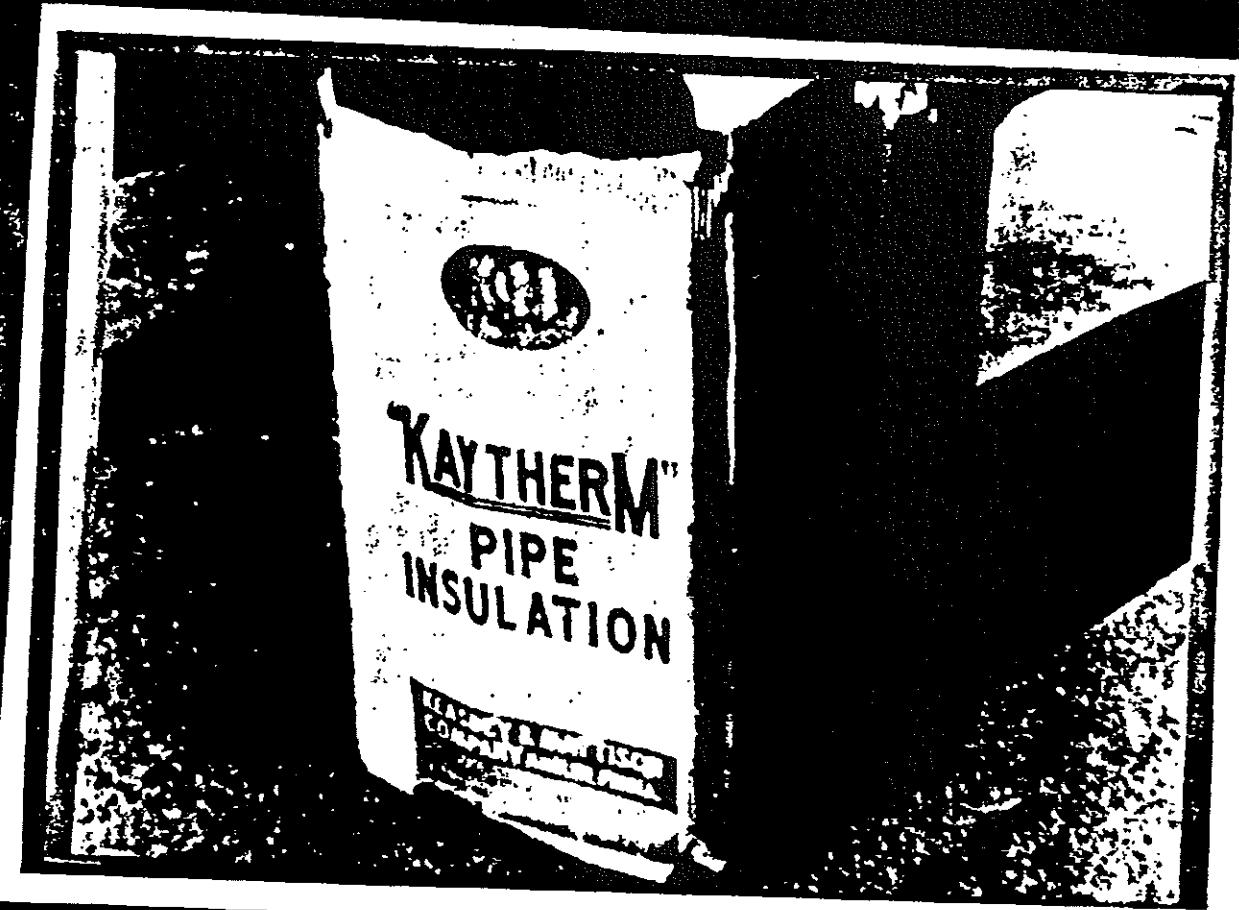

A-15



4-76

CONTENTS

UNIBESTOS

INSULATION



A-100

PELLETIER AND JONES

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25

PAGE	LINE
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	
31	
32	
33	
34	
35	
36	
37	

~~BB~~

Fill
in Depo
library