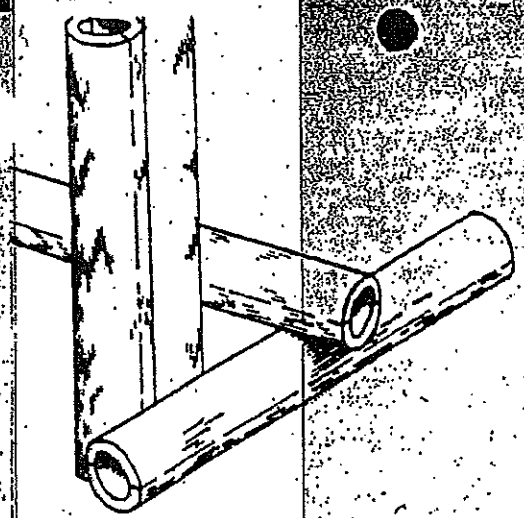


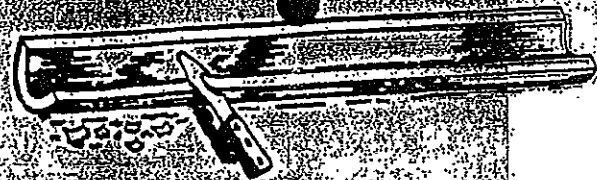


EXHIBIT
3 (9/2)
Sample
(4/5)


0001




85% MAGNESIA MOLDED PIPE COVERING




FITTING MOLDED PIPE COVERING

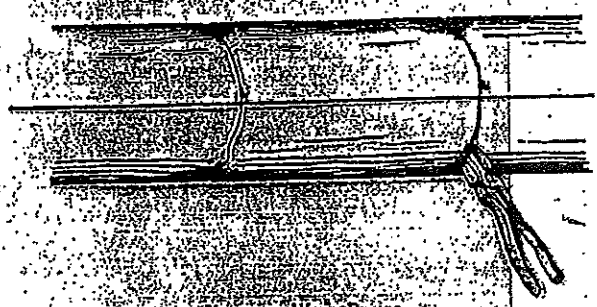

MASKING WIRE BANDS

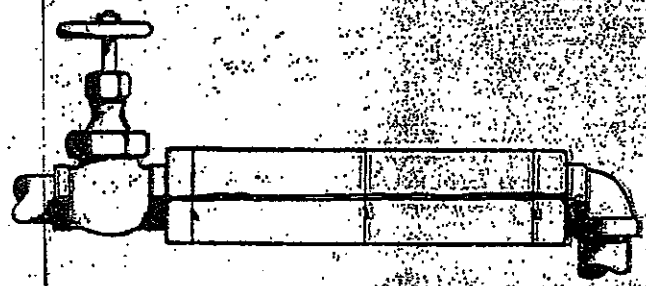


MOLDER PIPE COVERING ON SEWER PIPE

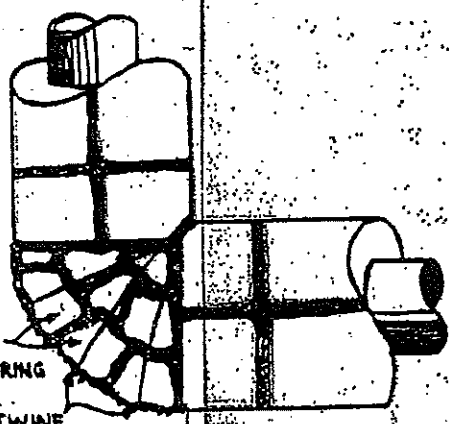

85% COVERING

TWINE

OF COVERING HELD WITH TWINE BEFORE MUDDING OVER TO COVER ELL

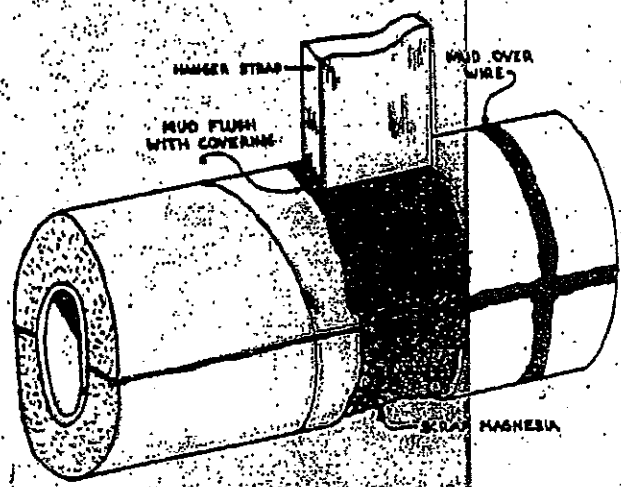

HANGER STRAP

MUD FLUSH WITH COVERING

MUD OVER WIRE

85% MAGNESIA



COVERING THE GAP AT A HANGER STRAP

DEFENDANT'S EXHIBIT
947994
PIRELLA

1965 main products
of cover

0002
3-2


X

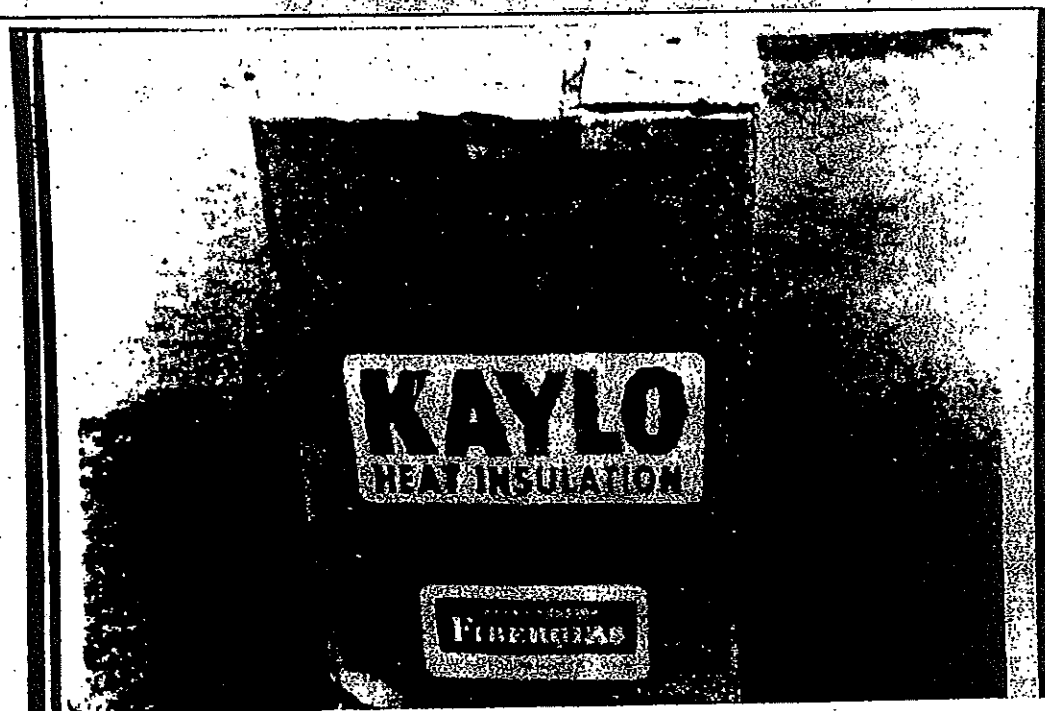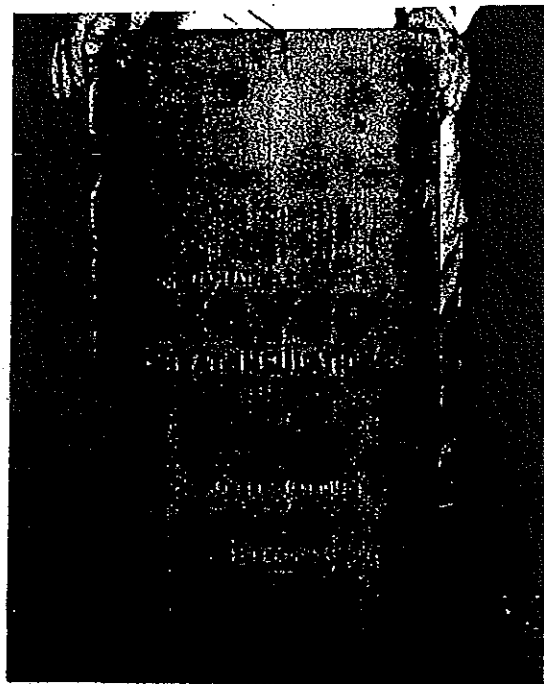

0003
3-3

KAYLO INSULATION

OWENS-CORNING
FIBERGLAS

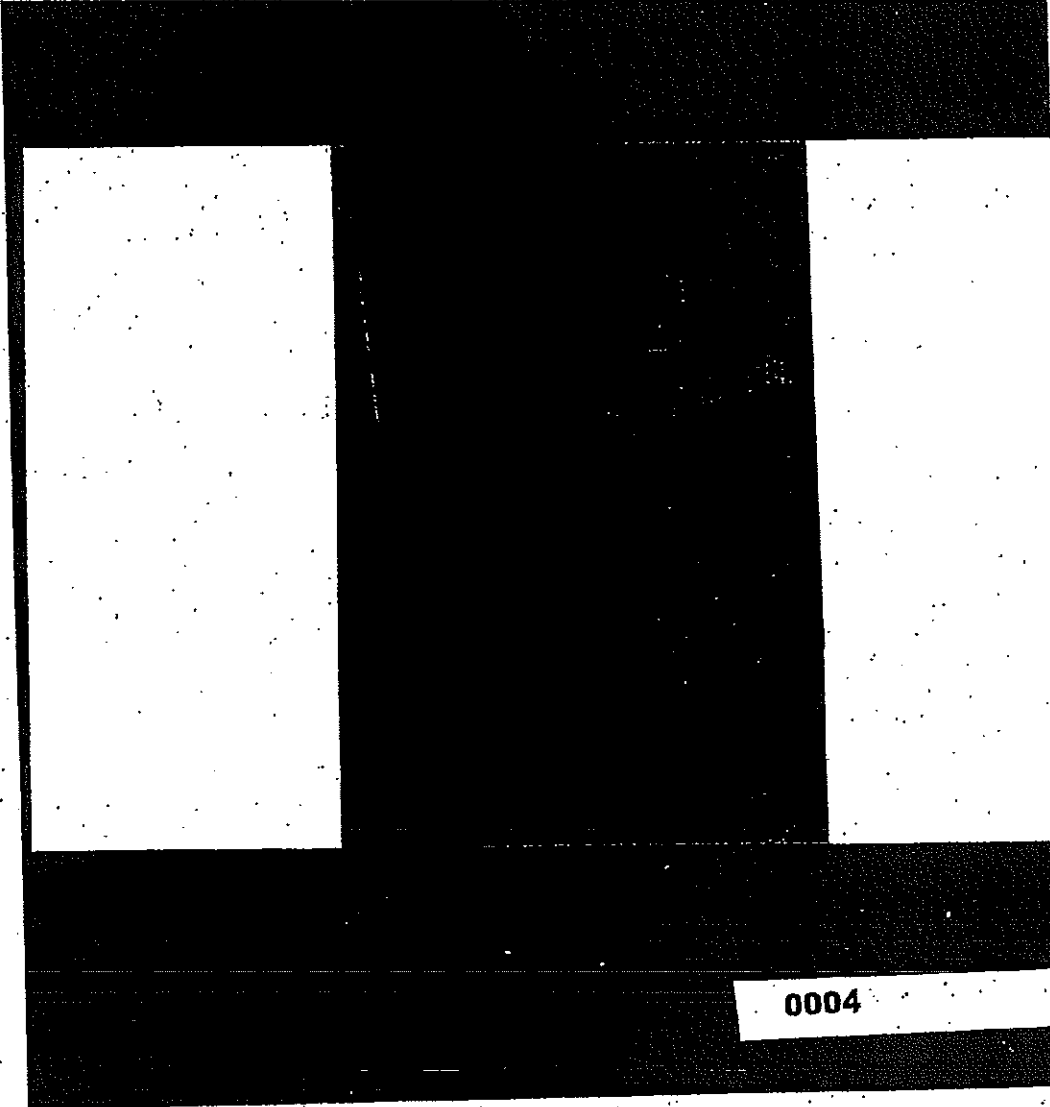

0004

3-4



OWENS CORNING
FIBERGLAS

Kaylo®

PLAINTIFF'S
EXHIBIT
3/6/94
12/27/94

0005

3-5

A

PLAINTIFF'S
EXHIBIT

3-05
9/24/67

KAYLO
INSULATION

FOR
TEMPERATURES
TO 1200° F.

MADE IN U.S.A.
KAYLO INSULATION
KAYLO INSULATION
KAYLO INSULATION

0006-3-6

7

MADE IN U.S.A.
FIBERGLAS



**INSULATING
CEMENT**


An all purpose material
for insulating cement
temperatures up to 1800°

So the Not Warm

MADE IN U.S.A.
MANUFACTURED BY
LACHE RICHER INDUSTRIES, INC.
CINCINNATI, OHIO

0007

OVER-CORING
FIBERGLAS

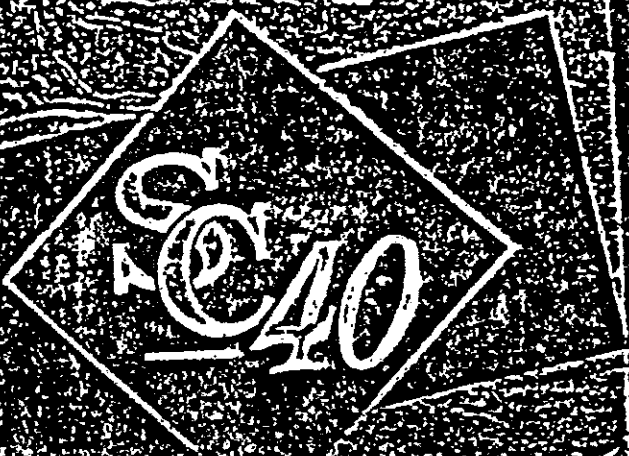

INSULATING
CEMENT

OVER-CORING
FIBERGLAS

0008

38

PABCO

WATER TIGHT


MADE IN U.S.A.

PRODUCT ID #4039

0009 3-9



0010 3-10

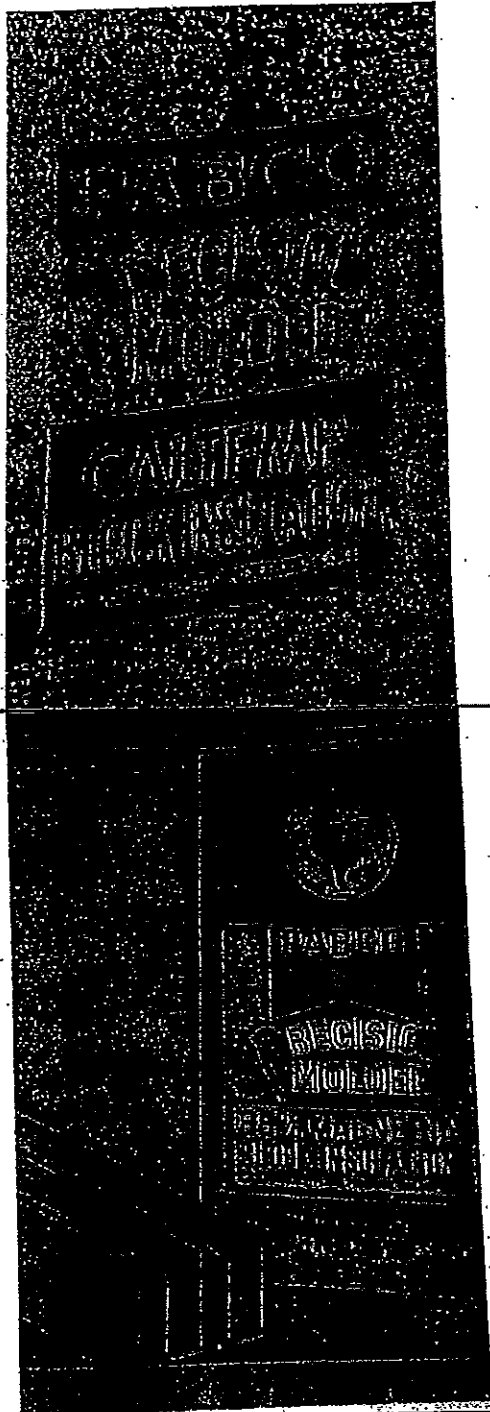


0011 3-11



PABCO®



**SUPER
CALTEMP®
INSULATION**

**PRECISION MOLDED
CORROSION INHIBITED**

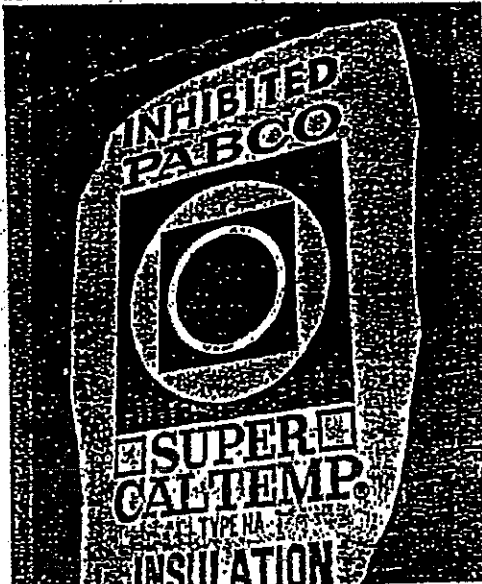

0012



3-12

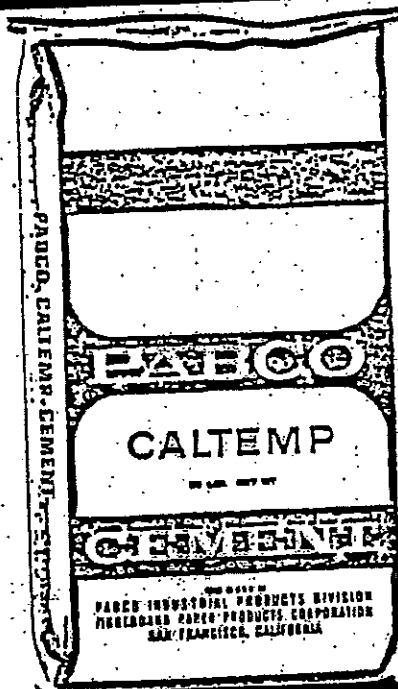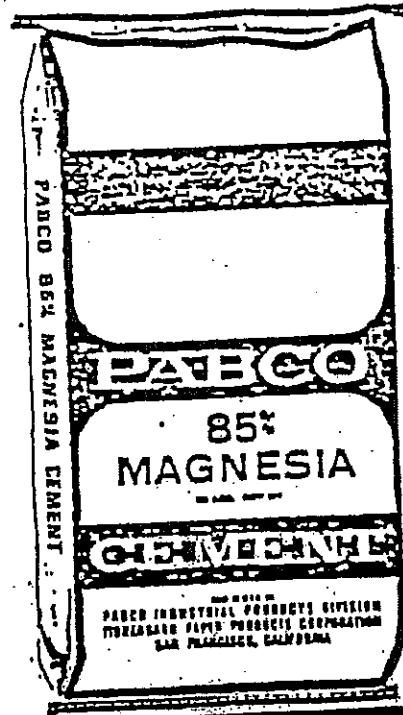

0013


3-13

?

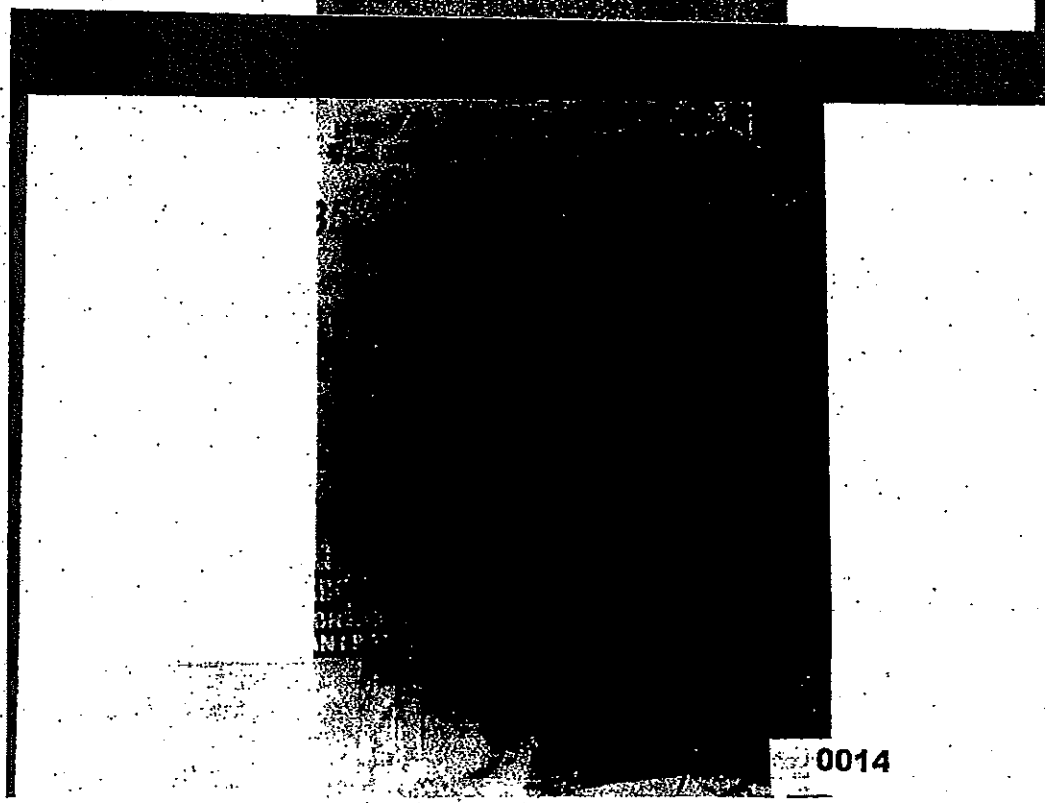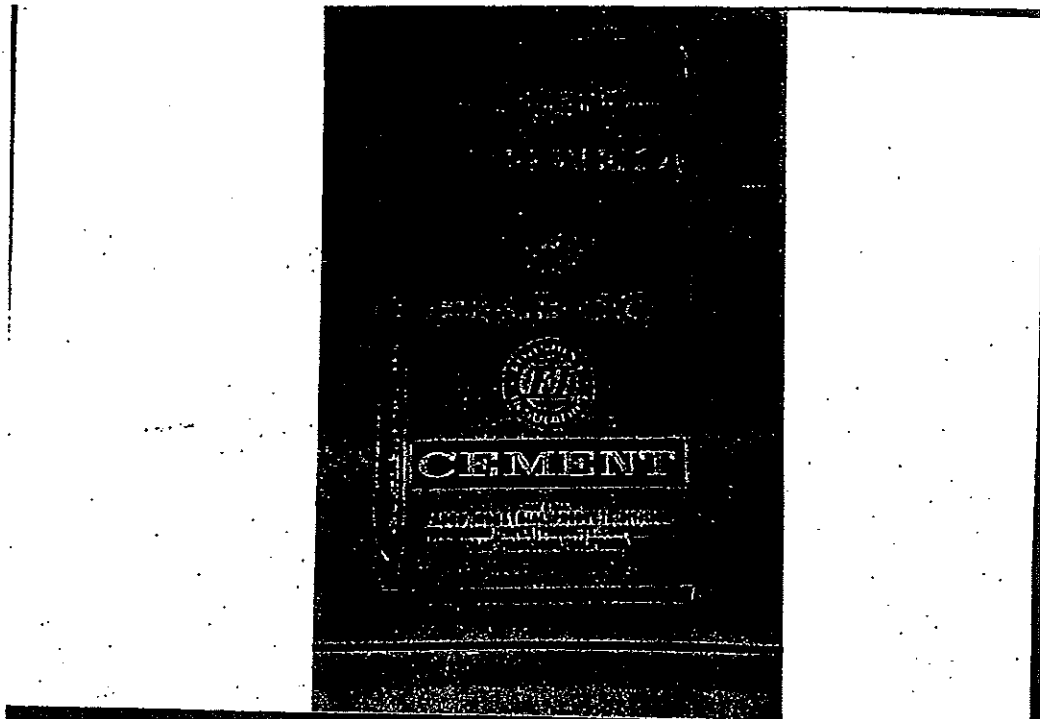


0014

3-14

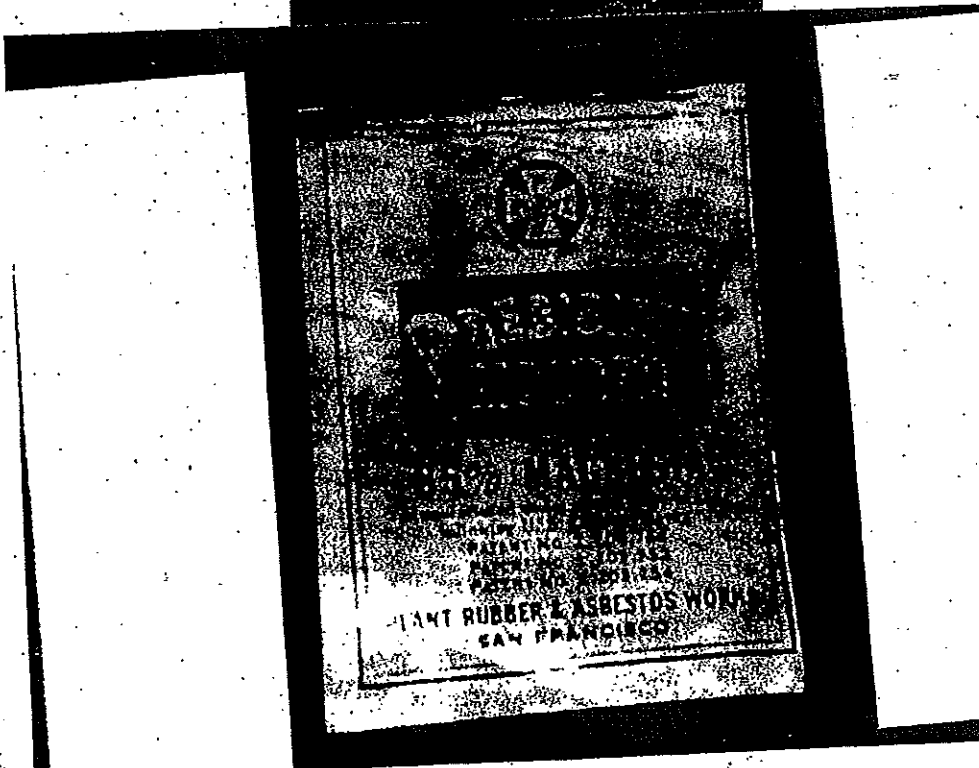


0015

3-15

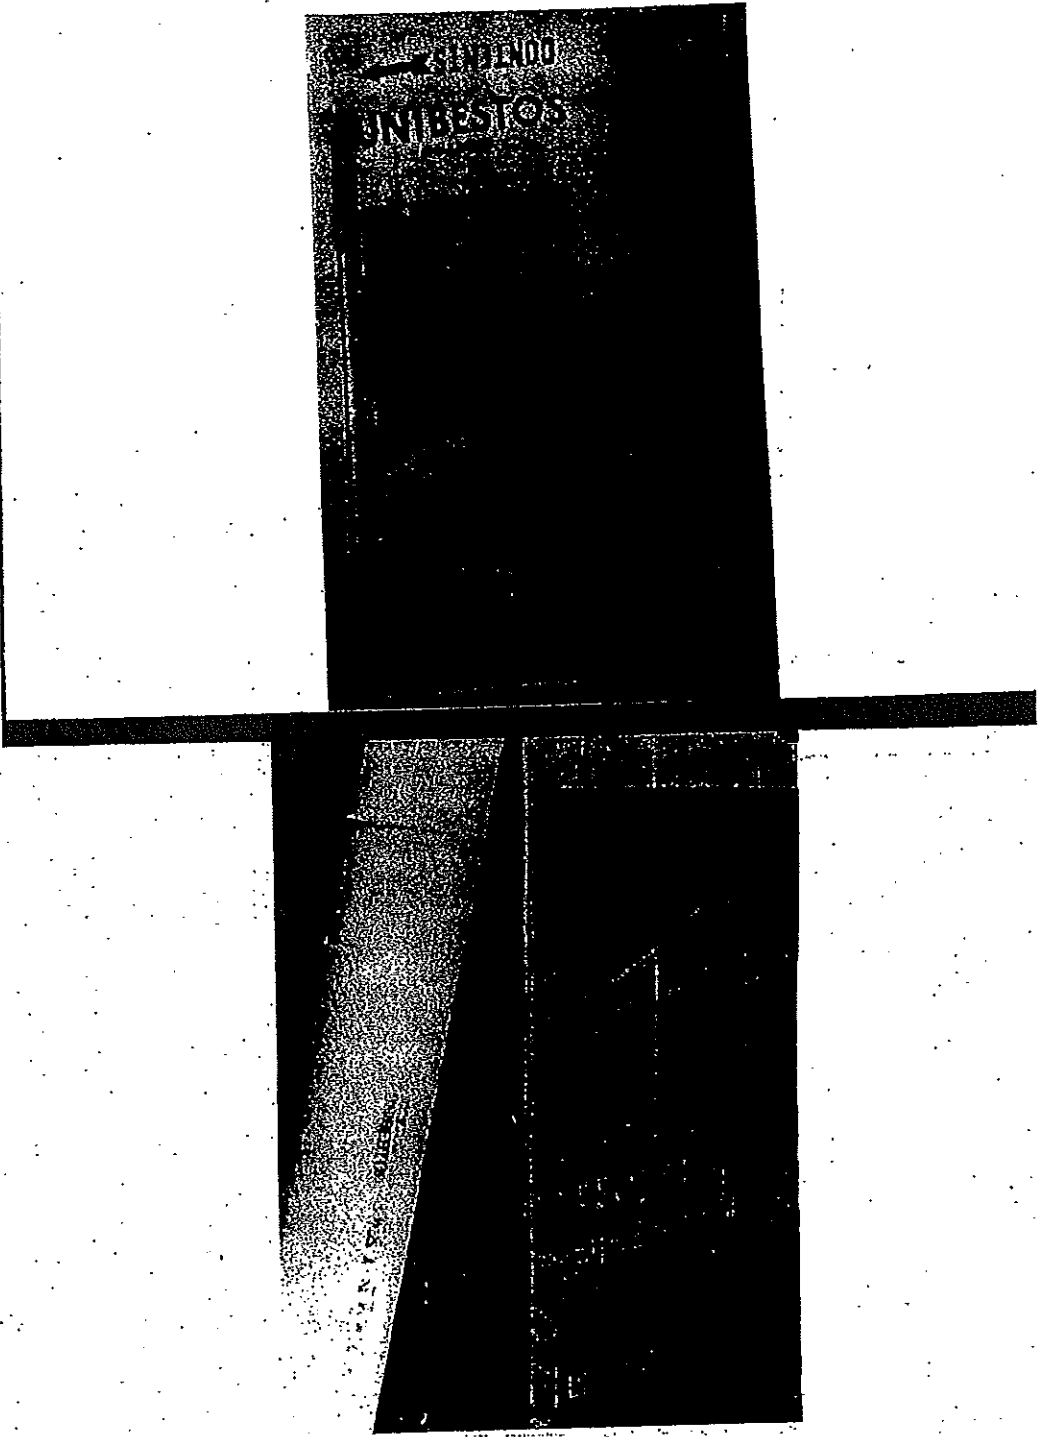

0016

3-16

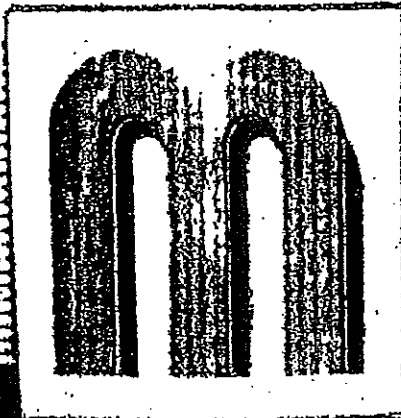


MUNDET
CUSTOM MOLDED
85% MAGNESIA
HEAT INSULATION

PIPE COVERING

SECTIONS	SIZE	THICKNESS
4	6	1

MUNDET CORP CORPORATION
NEW JERSEY



16A 3-17

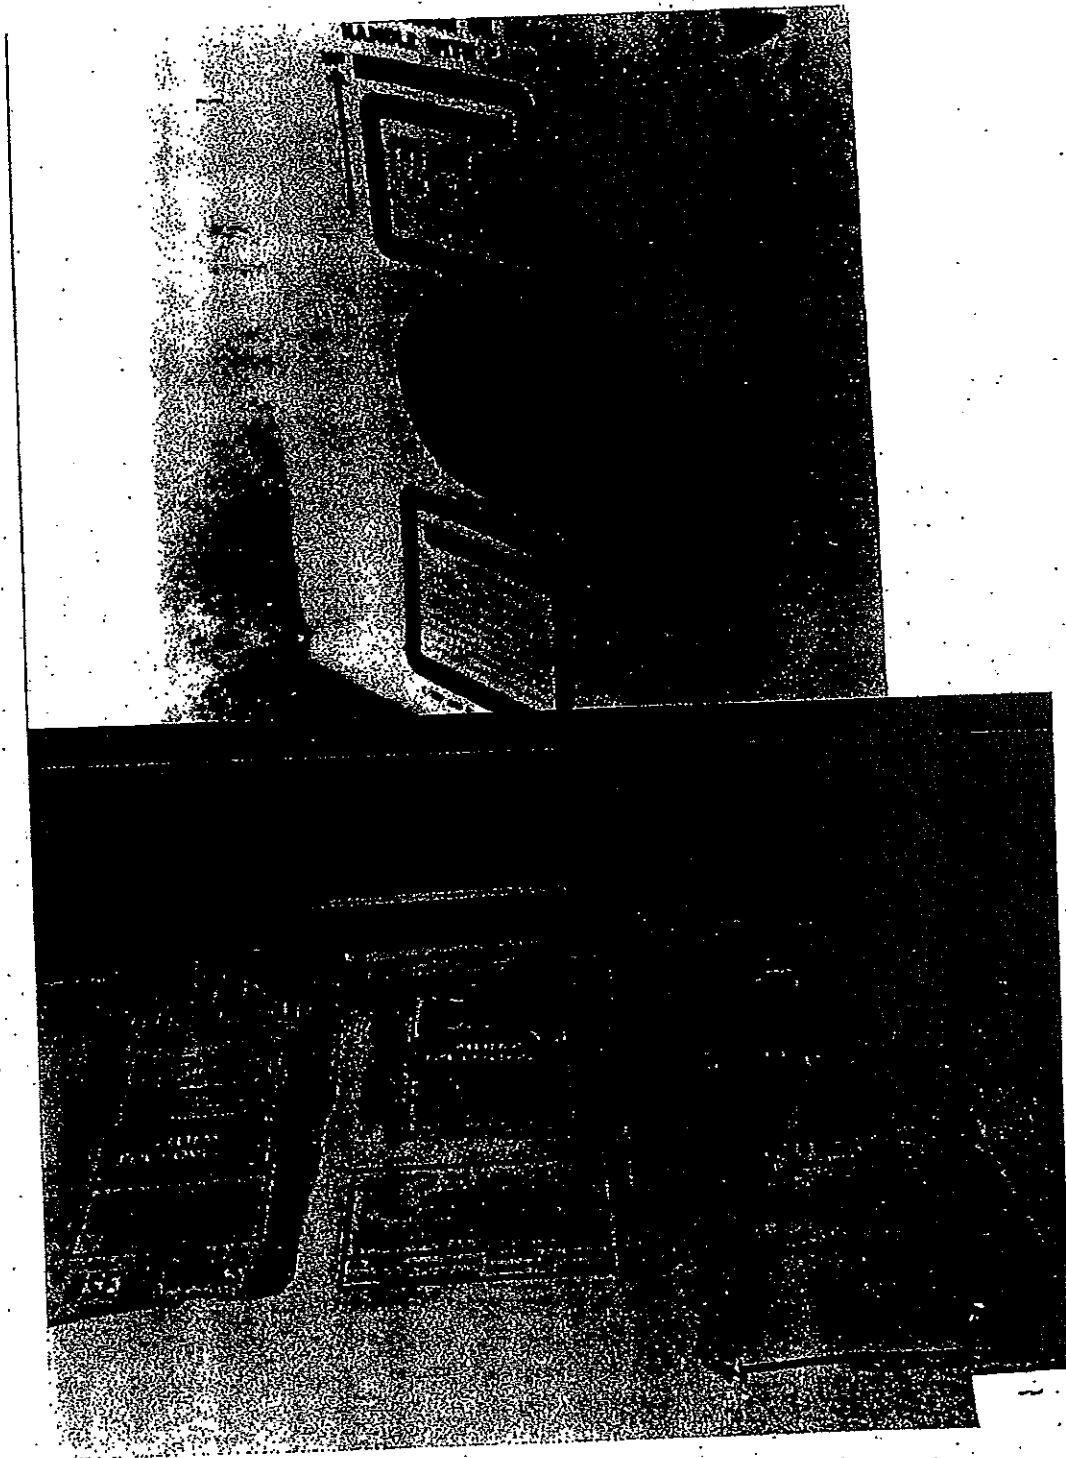

3-18



0017

?

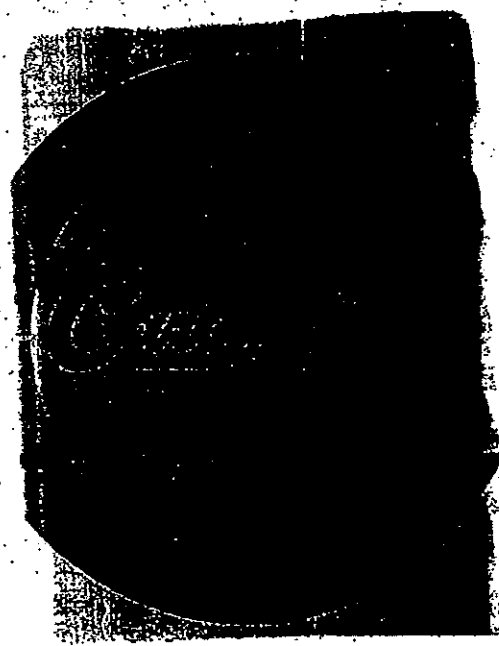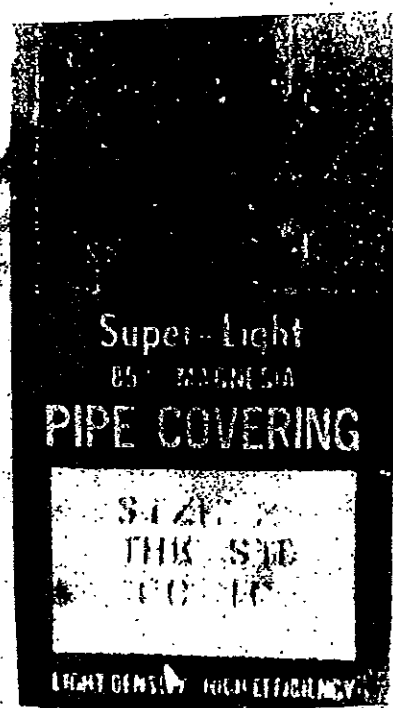

3-19



0018

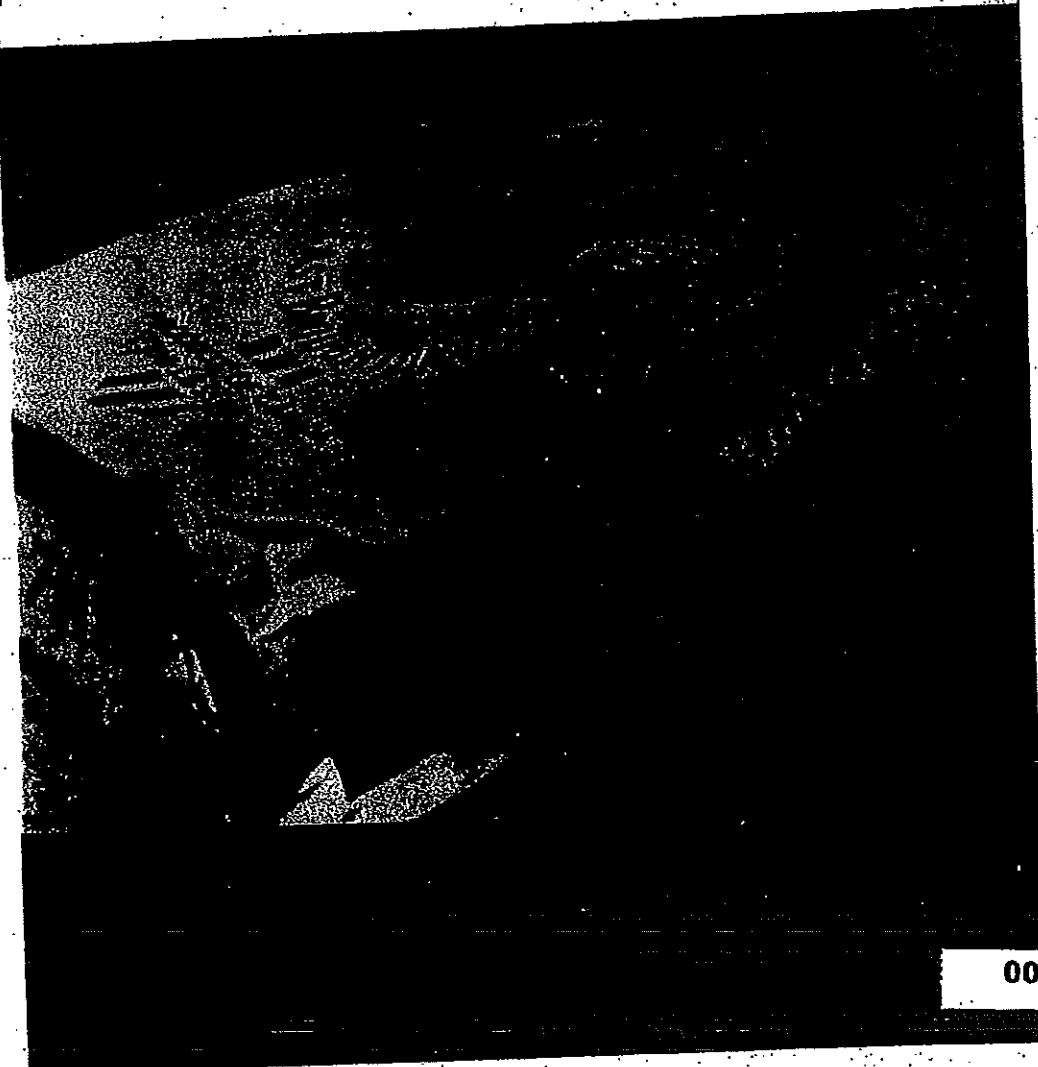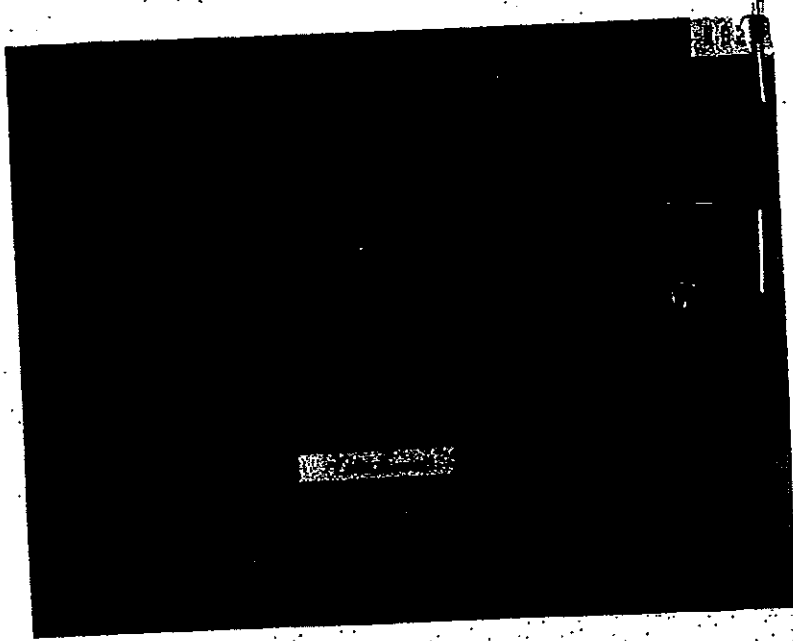

- 3-20



0019

?

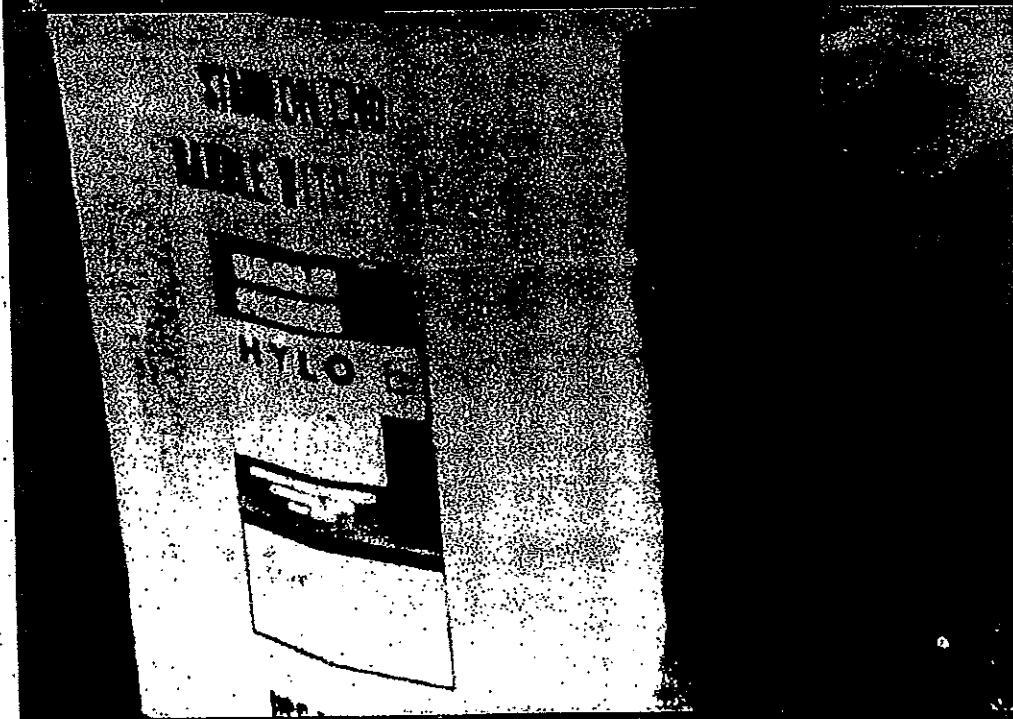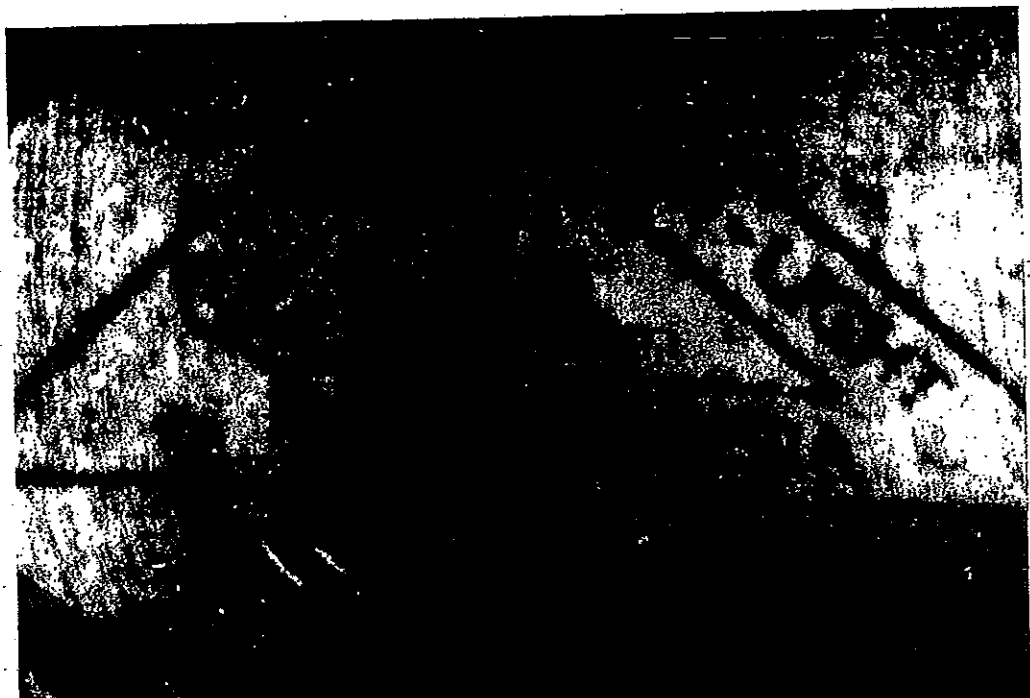

3-21

0020

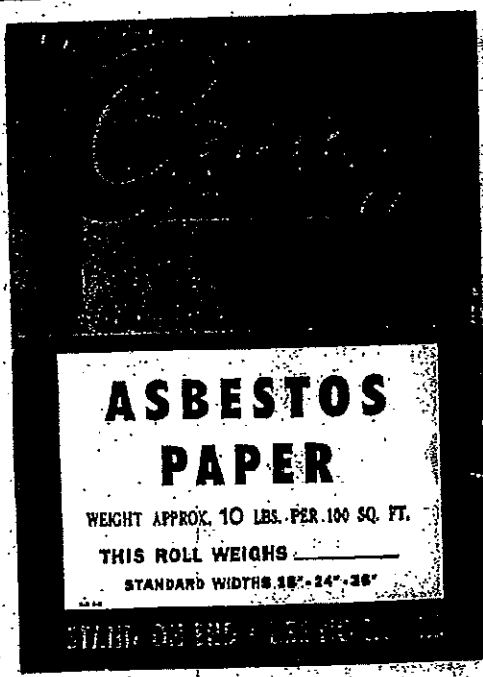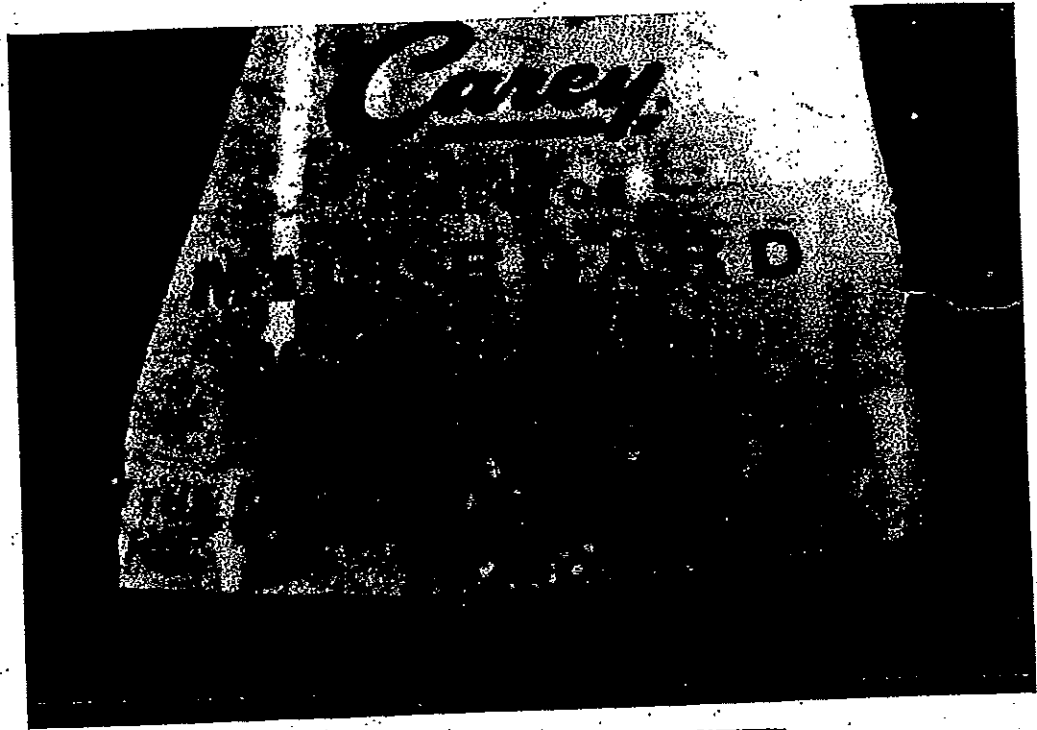

3-22




0021

MADE IN
CANADA

CONTAINS
3 SQUARES
GROSS WEIGHT: 15 lb. (6.8 kg)
**STAND
ON
END**
**USE
NO
HOOKS**
IN COOL WEATHER (BELOW 40°F) STONE OVERLAY
ON A SLANT PLANE BEFORE UNROLLING

Carey


THE FINEST QUALITY ROOFING MATERIAL AVAILABLE
FIBEROCK
ASPHALT IMPREGNATED
ASBESTOS FELT

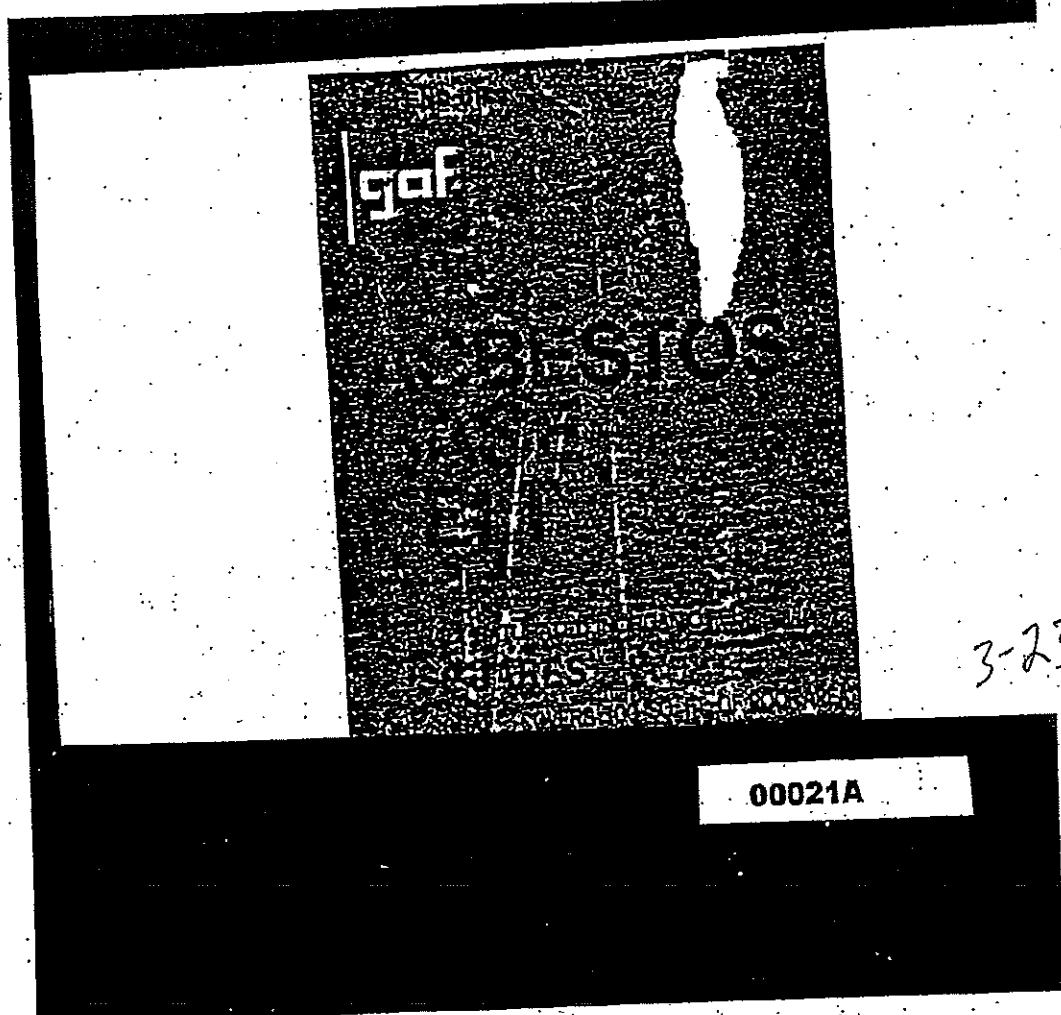

3-23

00021A

?

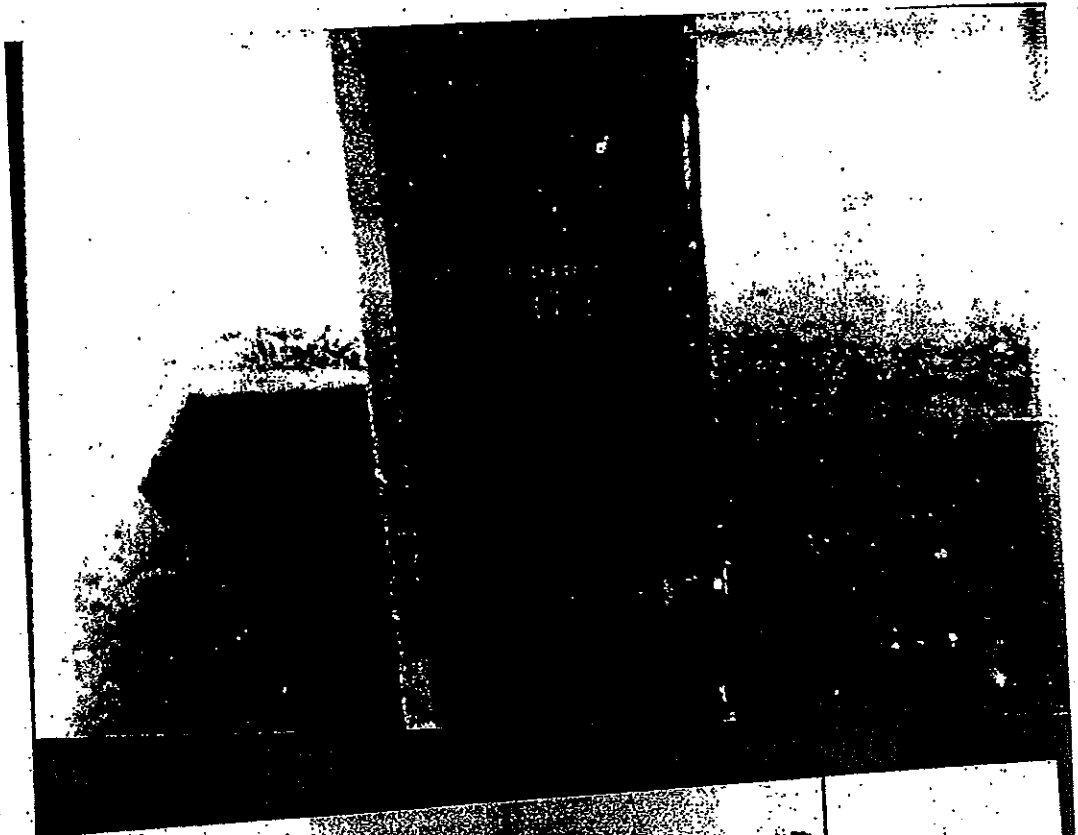

NEW

FOR

3-24

0022

EAGLE
RICHER

"66"
RACING

0023



3-15

?





0024 3-26

?

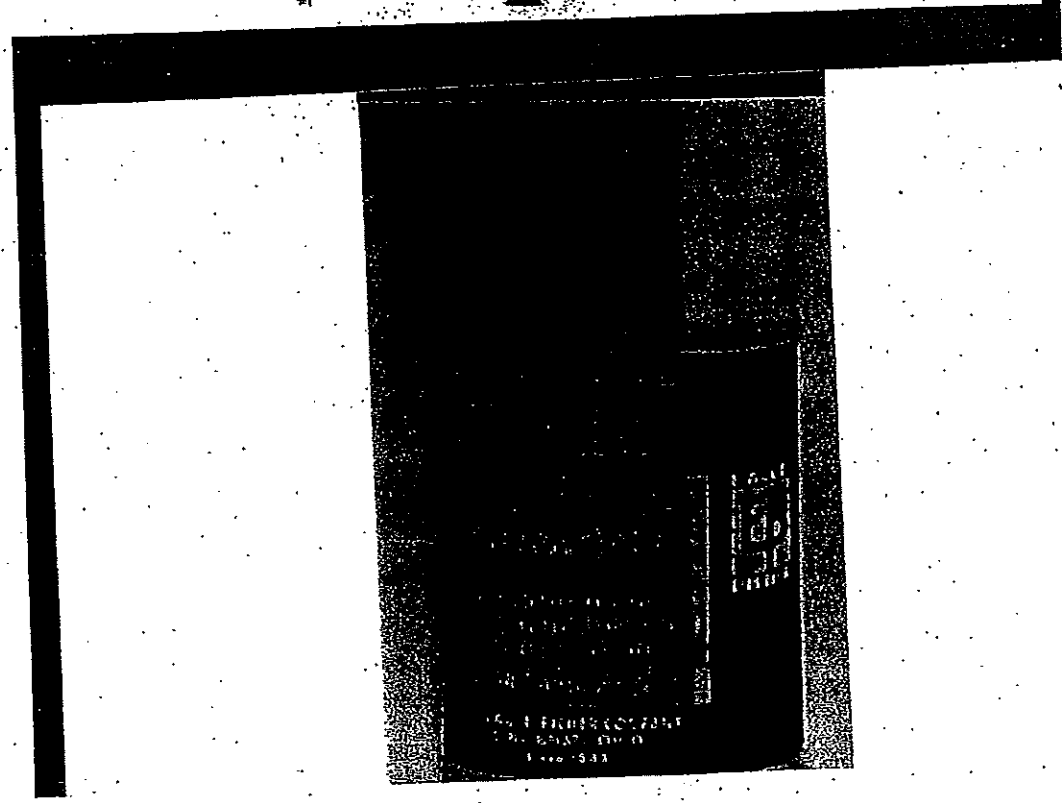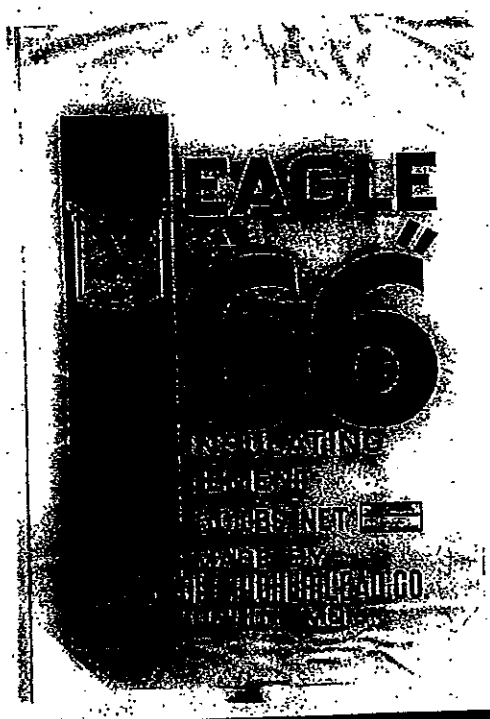


0025 3-27

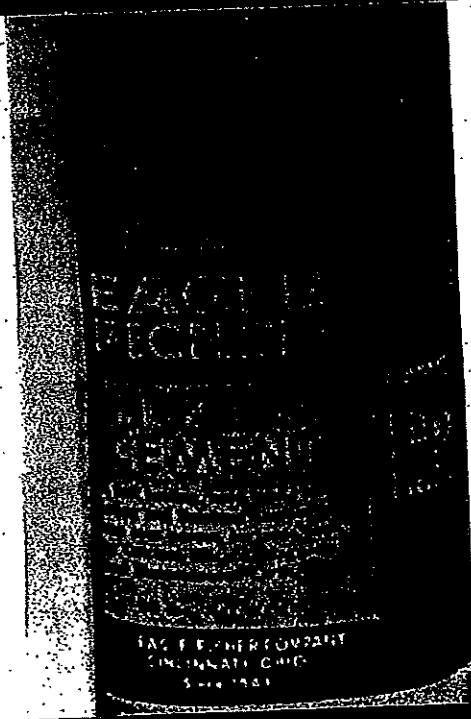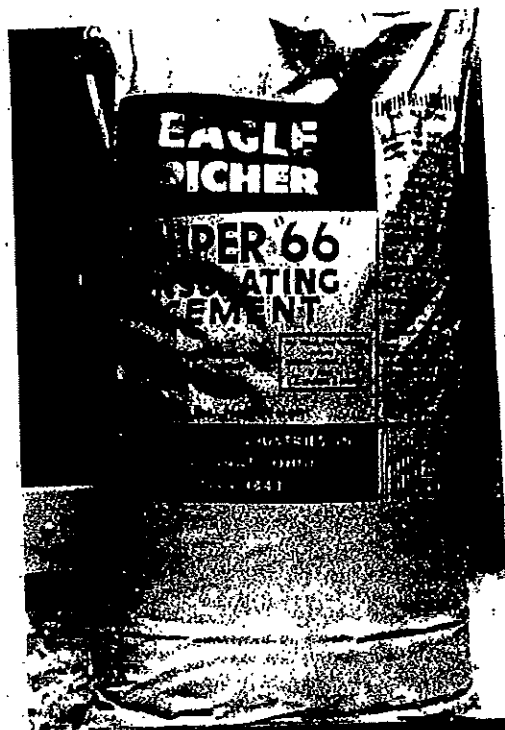

0026 3-28

?

PRODUCT ID #4032

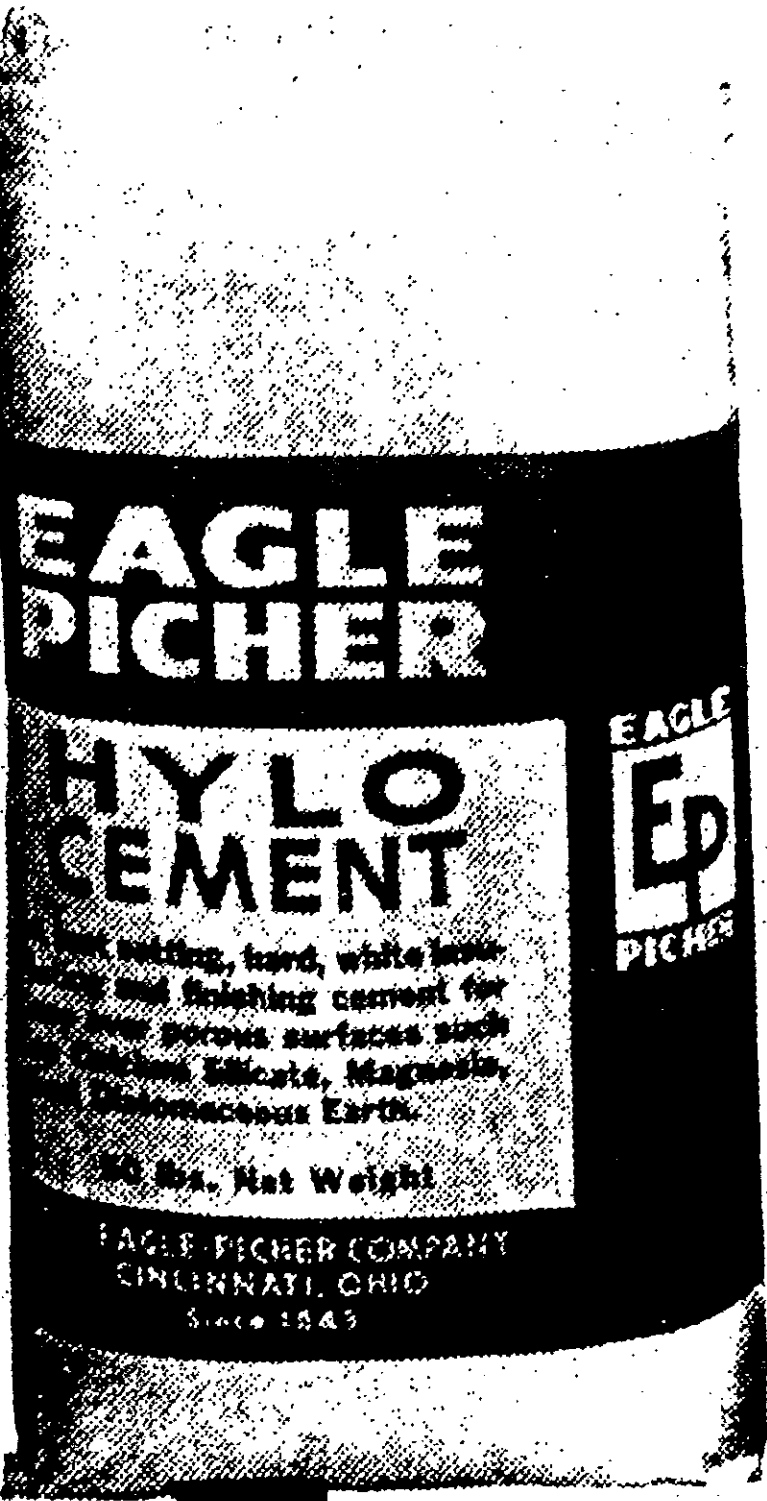

**EAGLE
PICHER**

**HYLO
CEMENT**

**EAGLE
EP
PICHER**

setting, hard, white
and finishing cement for
porous surfaces such
as silica, magnesite, magnesia,
refractory Earth.

50 lbs. Net Weight

EAGLE-PICHER COMPANY
CINCINNATI, OHIO
Since 1843

EP-2

0027 3-29

EP-4

**EAGLE
RICHER**

**ONE-COTE
CEMENT**

An all-purpose, fast setting
finishing cement, that insulates
as well as protects

50 lbs. Net Weight

EAGLE RICHER COMPANY
CHICAGO, ILL.
Since 1883

**EP
RICHER**

0028 3-30

?

**EAGLE
PICHER**


**LOOSE
SUPERGLAS® FIBER
INSULATION**

TYPE H2



An exceptionally efficient
insulation for low and high
temperatures

CONTENTS 3 1/2 CU. FT.

**EAGLE-PICHER INDUSTRIES, INC.
CINCINNATI, OHIO
Since 1843**

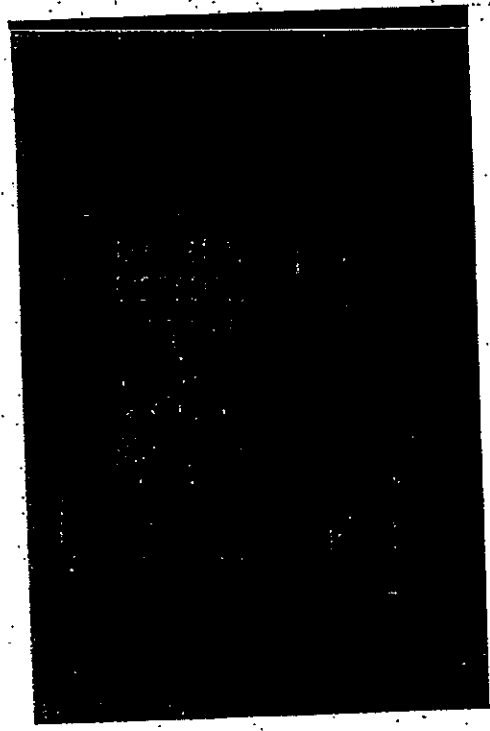


?

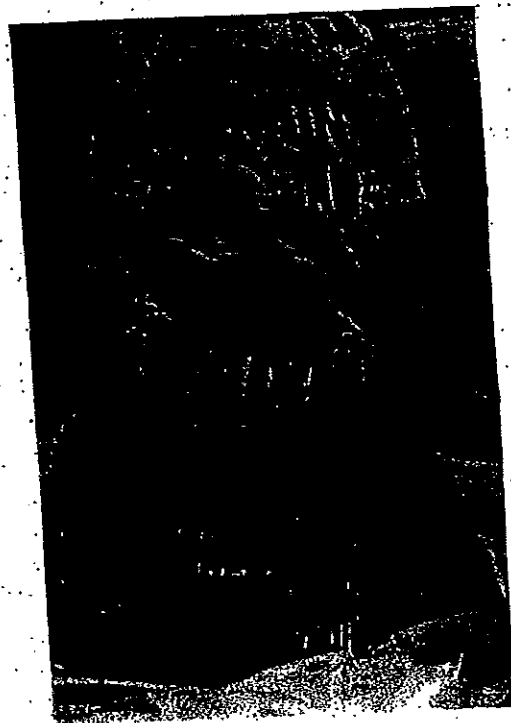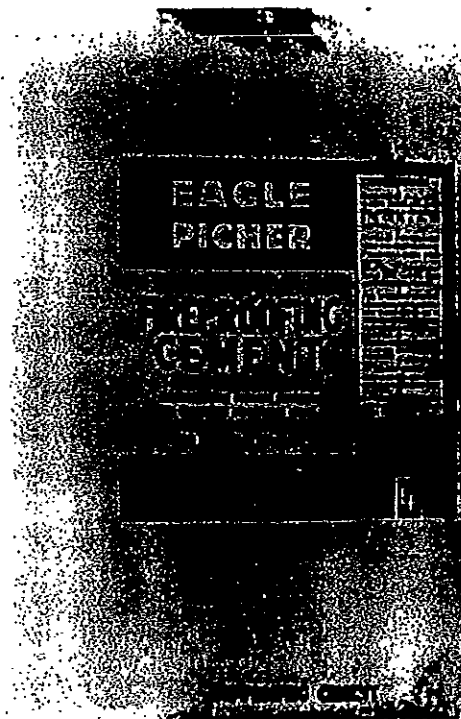

0030

3-32

?

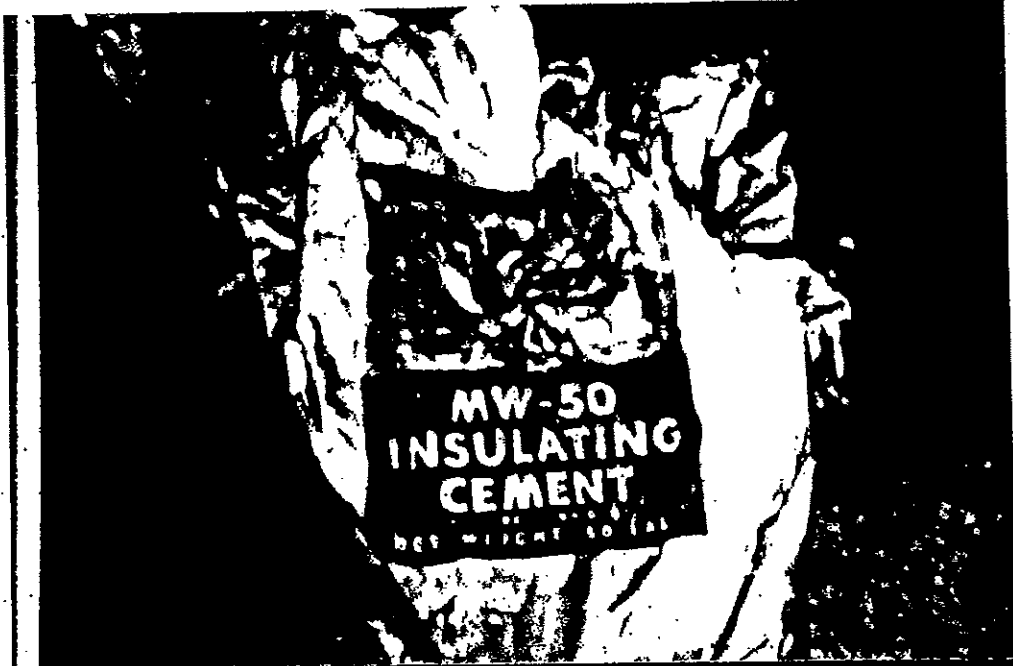

Asbestospray

ADHESIVE

MIXING AND APPLICATION
INSTRUCTIONS CAN BE
OBTAINED FROM THE
ASBESTOSPRAY CORP.
CAUTION: KEEP FROM FREEZING

THIS ADHESIVE SHALL BE MIXED WITH WATER, ONE TO ONE.
BE SURE CONTAINERS AND EQUIPMENT ARE CLEAN.


TYPE

ASBESTOSPRAY CORP.

NEWARK, NEW JERSEY

0031

3-33

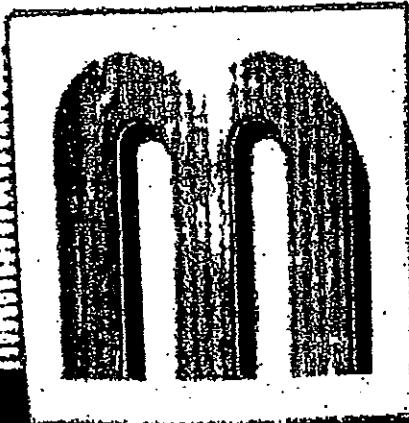


MUNDET
CUSTOM MOLDED
85% MAGNESIA
HEAT INSULATION

PIPE
COVERING
SECTIONS SIZE THICKNESS
#

MUNDET FORM CORPORATION
NEW YORK, N.Y. 10011


0031A -3-34

?

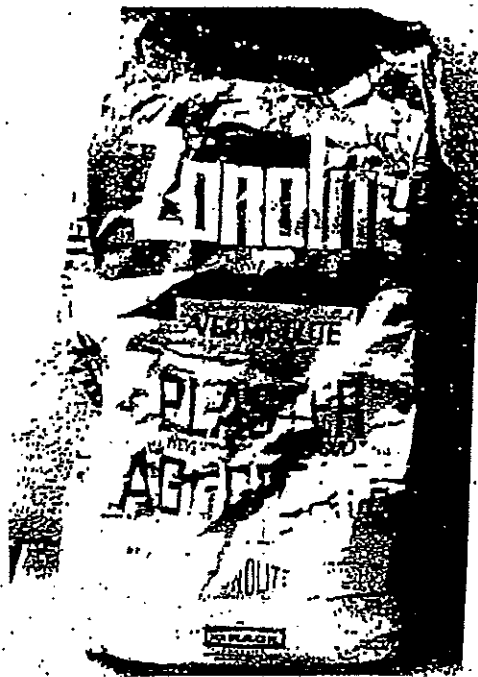

0032

3-35

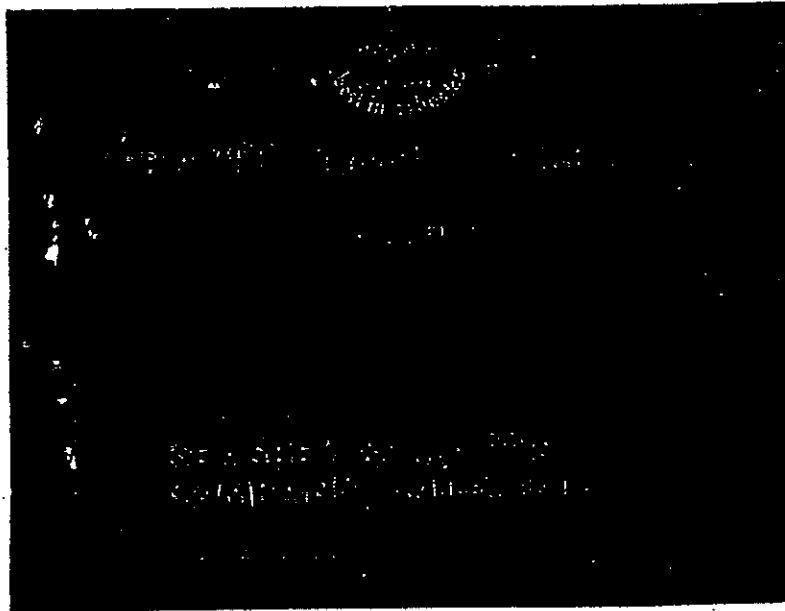

SPRAYED

"LIMPET"

ASBESTOS

NO NAILING
NO CUTTING
NO FITTING
NO CLIPPING

IT'S SPRAYED!



PERMITS SUPPLEMENTED BY:

ACRYSTICAL CORROSION
THERMAL INSULATION
CONDENSATION CONTROL
FIBER PROTECTION

KLASIK & NATIONAL COMPANY



AMBIER PERNA

0033

3-36

?

EAGLE-PICHER

SUPERGLAS

**TYPE - 1500
BULK FIBER**

FORM D 262

PRINTED IN U.S.A.

THE EAGLE-PICHER COMPANY
GENERAL OFFICES CINCINNATI 1, OHIO

LIMPET

ASBESTOS FIBRE

LW25

**FIREPROOFING
GRADE**

MADE IN
CANADA



FABRIQUE AU
CANADA

ATLAS ASBESTOS

COMPANY

Division of Bell Asbestos Mines, Ltd.

MONTREAL

TORONTO

EDMONTON

VANCOUVER

NET 75 LBS.





LW25





0034

B-31

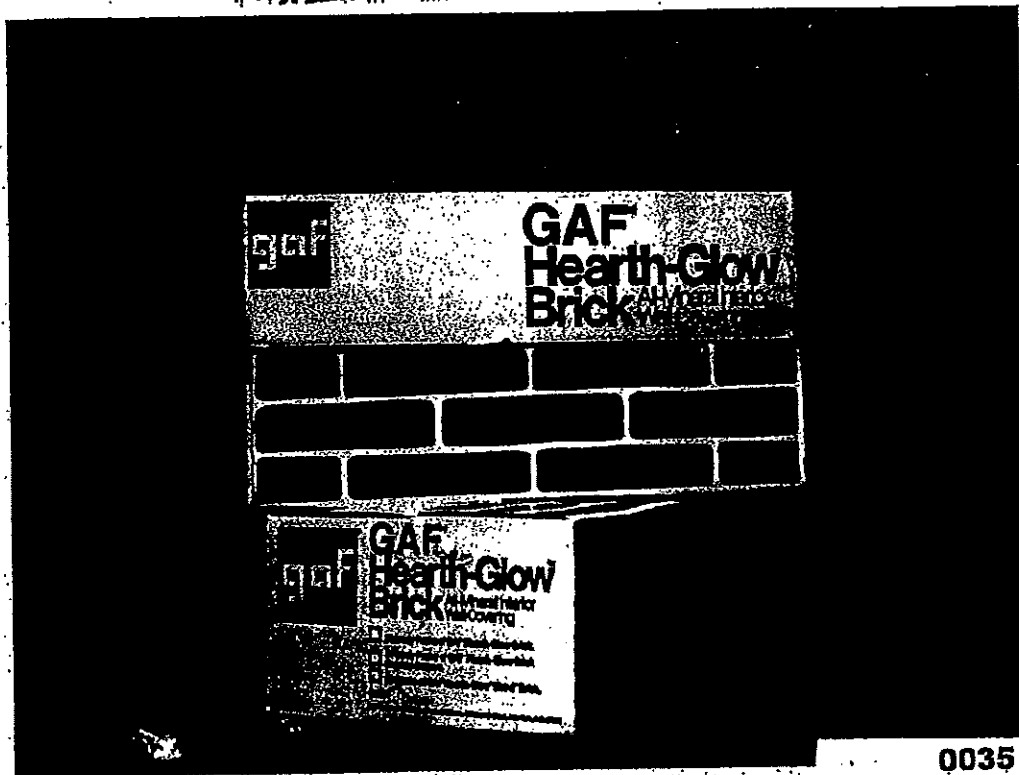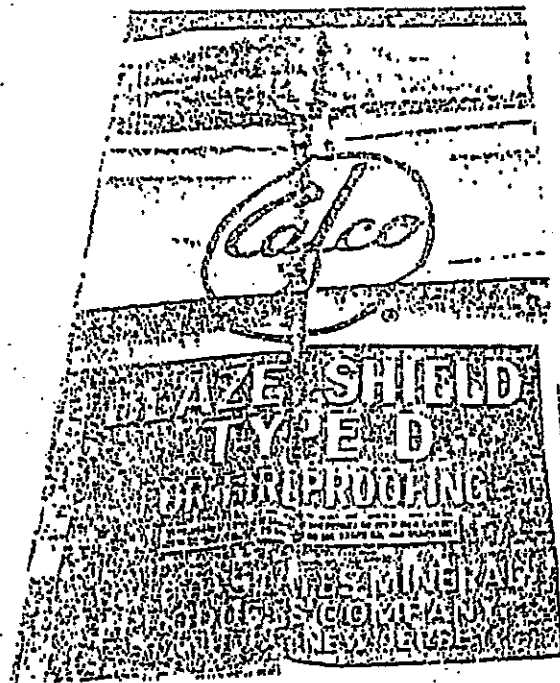


0035

3-38

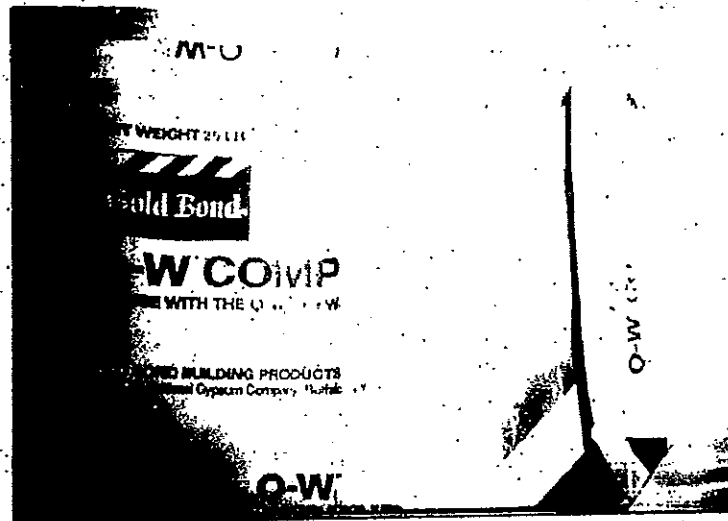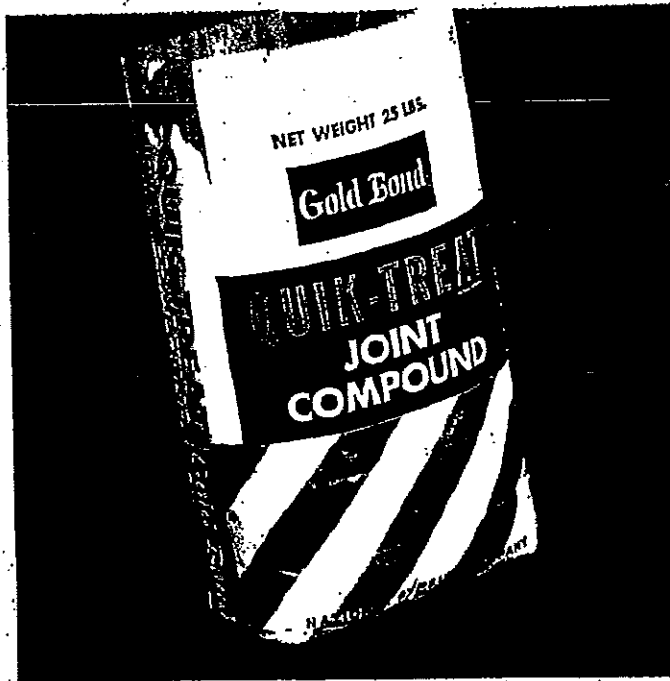

?

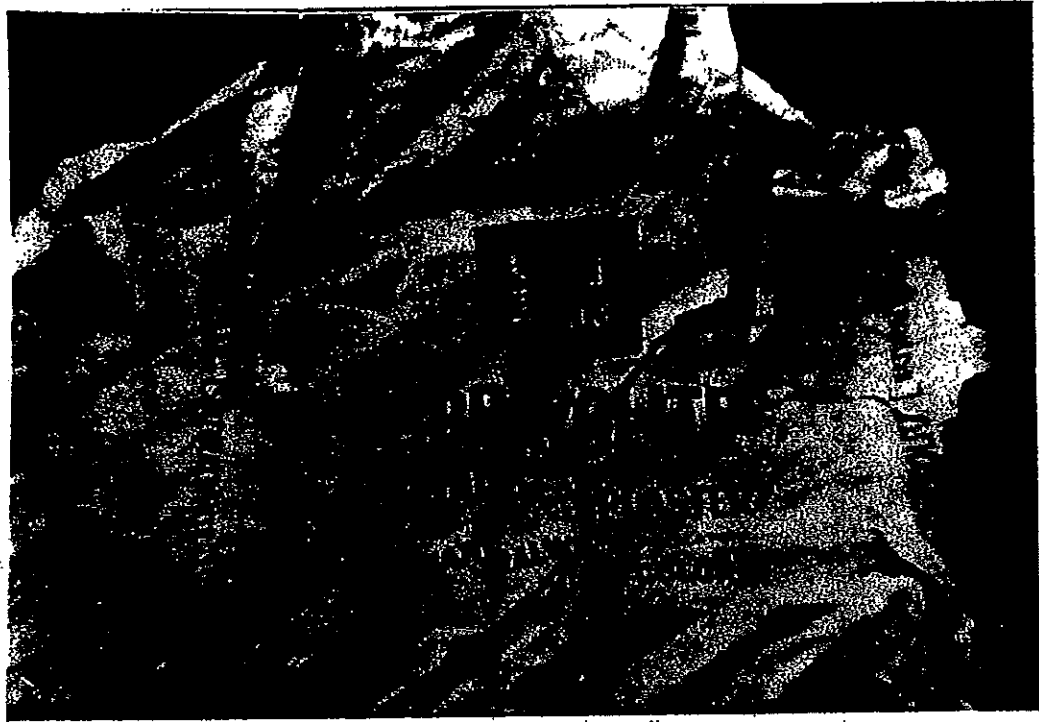

Gold Bond

Texture Paint

FOR PLASTIC WALL FINISHING

CONTENTS **25** POUNDS

Manufactured by


NATIONAL GYPSUM COMPANY

BUFFALO, N. Y.

0037

3-40

?

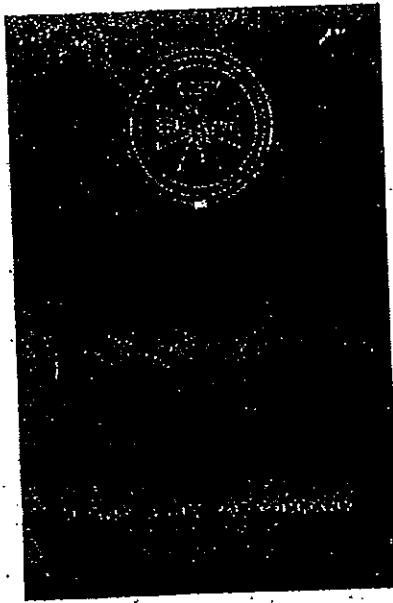

Master

United Bond

ENGINEERING
CONSTRUCTION

NATIONAL GYPSUM COMPANY
General Office - Buffalo, N. Y.


ALLIANCE	ATLANTA	BOSTON	CHICAGO
DETROIT	INDIANAPOLIS	ST. LOUIS	WASH. DC.
PHILADELPHIA	KANSAS CITY	MEMPHIS	

3-41



0038

?

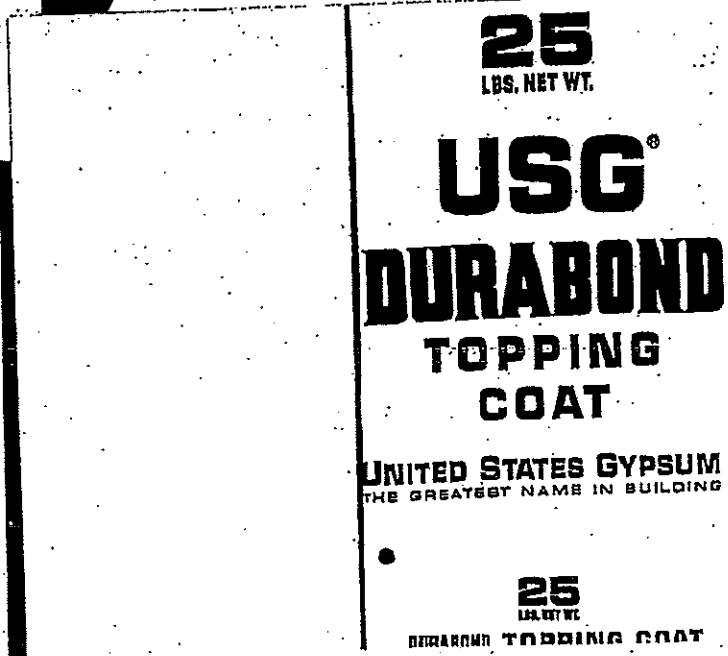

0039
3-42

25 LBS. NET WT.
DURABOND TOPPING COAT

?

25 LBS.  NET WT.


DURABOND
JOINT COMPOUND

FOR ONE-DAY
JOINT FINISHING



A BEST QUALITY PRODUCT MANUFACTURED BY
UNITED STATES GYPSUM
THE GREATEST NAME IN BUILDING

CONTENTS **USG** 5 GALLONS



USG UNITED STATES GYPSUM COMPANY

STRUCTOLITE
HEAVY STRUCTURAL GYPSUM

UNITED STATES GYPSUM CO.

NEW YORK CLEVELAND,
CHICAGO MINNEAPOLIS,
KANSAS CITY SAN FRANCISCO.


0040
3-43

DURABOND

JOINT COMPOUND


DURABOND

TOPPING COAT

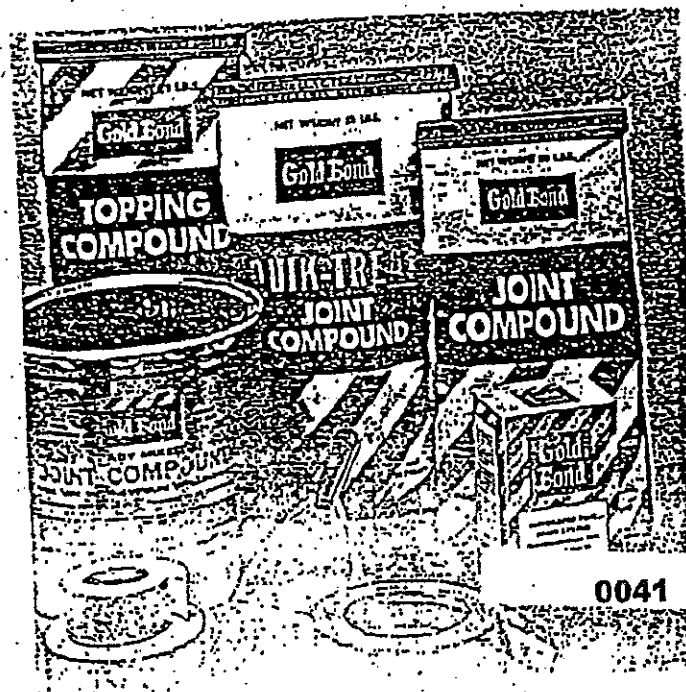


?

DURABOND*

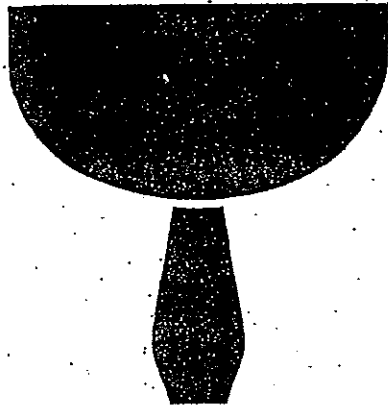

**JOINT COMPOUND
TAPING**

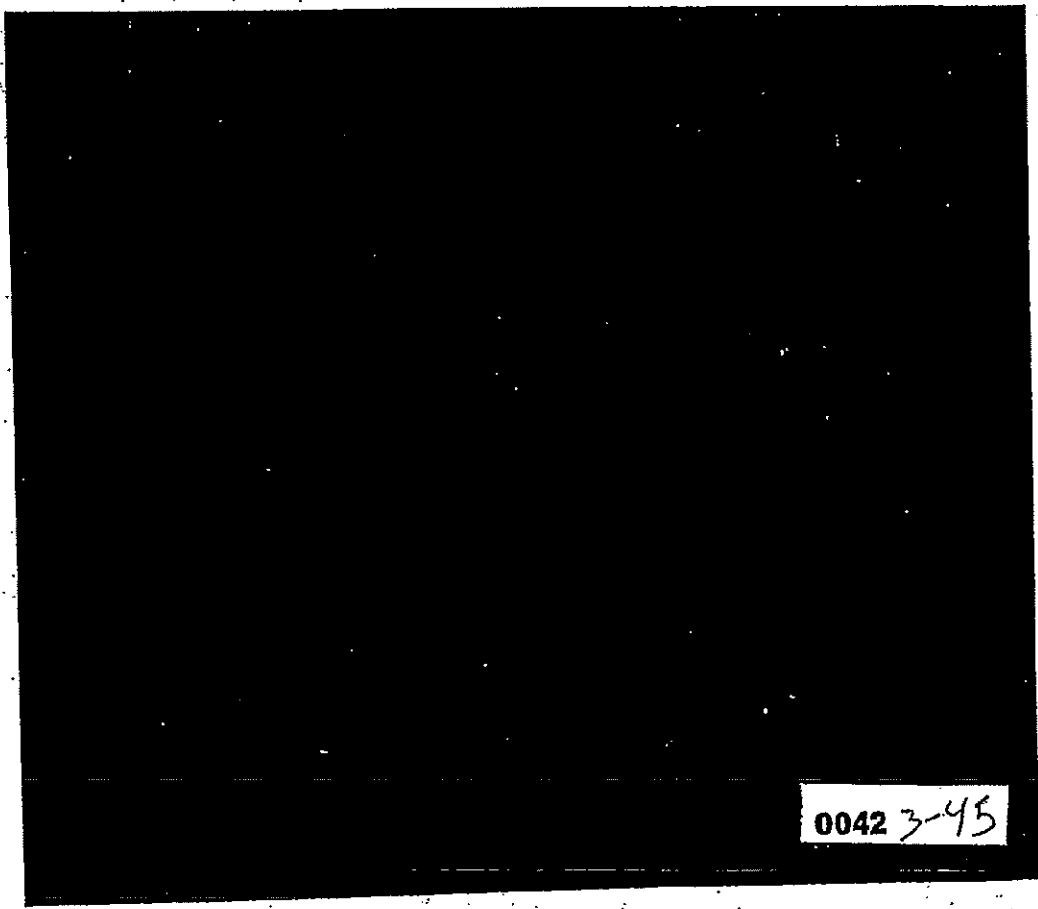

0042 3-45

?

PLASTIC CEMENT

810-22

Plastic Asphalt—Solvent Type
For Roof Repairs and Flashings

COMBUSTIBLE MIXTURE
CONTAINS PETROLEUM
DISTILLATE HARMFUL OR
FATAL IF SWALLOWED

KEEP OUT OF THE
REACH OF CHILDREN

COMBUSTIBLE MIXTURE—HARMFUL OR FATAL IF SWALLOWED

LIMITED WARRANTY
This product is warranted to be free from defects in material and workmanship under normal conditions of use for a period of one year from the date of purchase. The warranty is void if the product is used in an unauthorized manner or if it is subjected to abnormal conditions of use. The warranty does not cover damage caused by fire, flood, or other causes beyond the control of the manufacturer. The manufacturer's liability is limited to the replacement of the product, and no other damages, including consequential damages, shall be recoverable. This warranty is given in lieu of any other warranty. The manufacturer's name and address are printed on the product label.



FIVE GALLONS
(18.9 LITERS)

GENETAN



3-46



0043

25
LBS NET WEIGHT

MRF-A-TAPE

JOINT COMPOUND

TAPING

UNITED STATES GYPSUM

247-B-TAPE

EMT COMPOUND TAPING

A special compound for embedding
metal mesh, metal corner
brads and joints into steel, iron, wallboard, etc.

DIRECTIONS FOR USE

Use drinkable water and clean mixing equipment. Mix powder thoroughly into water until completely wet. Mixture must soak for at least 10 minutes in cold water. Re-mix until smooth. Apply thoroughly to dry surfaces only.

WATER PROPORTIONS PER 25# BAG

Hand Tool Application
Mechanical Taping
Mechanical Fill Caps

BASIC CAUTIONS

- EXCESSIVE WATER WILL WEAKEN ADHESION
- AGE, TYPE OF SURFACE, TEMPERATURE, HUMIDITY, WIND, AND OTHER FACTORS WILL AFFECT THE SETTING TIME
- PROTECT FROM FREEZING AND THAWING
- PROTECT FROM EXCESSIVE HEAT AND DRYING
- PROTECT FROM EXCESSIVE MOISTURE AND CONDENSED WATER
- KEEP WORKING SURFACES WET UNTIL SET
- COMPLETELY DRY

For more information, contact
UNITED STATES GYPSUM

WARRANTY
Since this product is used for setting and embedding metal mesh, metal corner brads and joints into steel, iron, wallboard, etc., the manufacturer warrants that the product will set and bond to these materials under normal conditions of use. This warranty is void if the product is used for any other purpose or if it is not used in accordance with the directions on the label.

UNITED STATES GYPSUM
CHICAGO, ILLINOIS

247-B-TAPE
25# BAG



UNITED STATES GYPSUM

UNITED STATES GYPSUM

dry surfaces only.

WATER PROPORTIONS PER 25 # BAG

Hand Tool Application
Mechanical Taping
Mechanical Fill Coat

Approx. 16 1/2 pts
Approx. 19 1/2 pts
Approx. 18 pts

BASIC CAUTIONS

- EXCESSIVE WATER CAUSES ABNORMAL SHRINKAGE, EDGE CRACKING, POOR BOND AND OTHER PROBLEMS.
- DO NOT INTERMIX WITH OTHER JOINT COMPOUNDS - IN WET OR DRY FORM.
- MINIMUM AIR, WATER, MIX AND SURFACE TEMPERATURES OF 50° F. MUST BE MAINTAINED WITHIN WORKING AREAS UNTIL JOINTS ARE COMPLETELY DRY.

For extra information, consult U. S. G. literature or your local U. S. G. representative.

WARRANTY

Since methods and conditions of application and use are beyond the control of the United States Gypsum Company, its warranties of MERCHANTABILITY as well as any other warranties express or implied, made in connection with the sale of this product SHALL NOT BE ENFORCEABLE OR ACTIONABLE UNLESS the product is used according to United States Gypsum Company directions or specifications.

UNITED STATES GYPSUM

CHICAGO, ILLINOIS 60604

1974, 1969, 8/66



JOINT COMPOUND TAPING

(OLD DESIGNATION)

(PERF-A-TAPE JOINT COMPOUND)

A phosphate ^{reinforcement} ~~formulation~~ ^{formulation} for embedding
PERF-A-TAPE reinforcement, fasteners, metal corner
beads and drywall trims over gypsum wallboard.

DIRECTIONS FOR USE


Use drinkable water and clean mixing equipment. Mix
powder thoroughly into water until ^{powder} is completely
wet. Mixture must soak for at least 7 minutes — longer
in cold water. Re-mix until smooth. Apply over thoroughly
dry surfaces only.

WATER PROPORTIONS PER 25 # BAG

Hand Tool Application


Apply
Apply

PLAINTIFF'S
EXHIBIT
959478
9 F.V.19

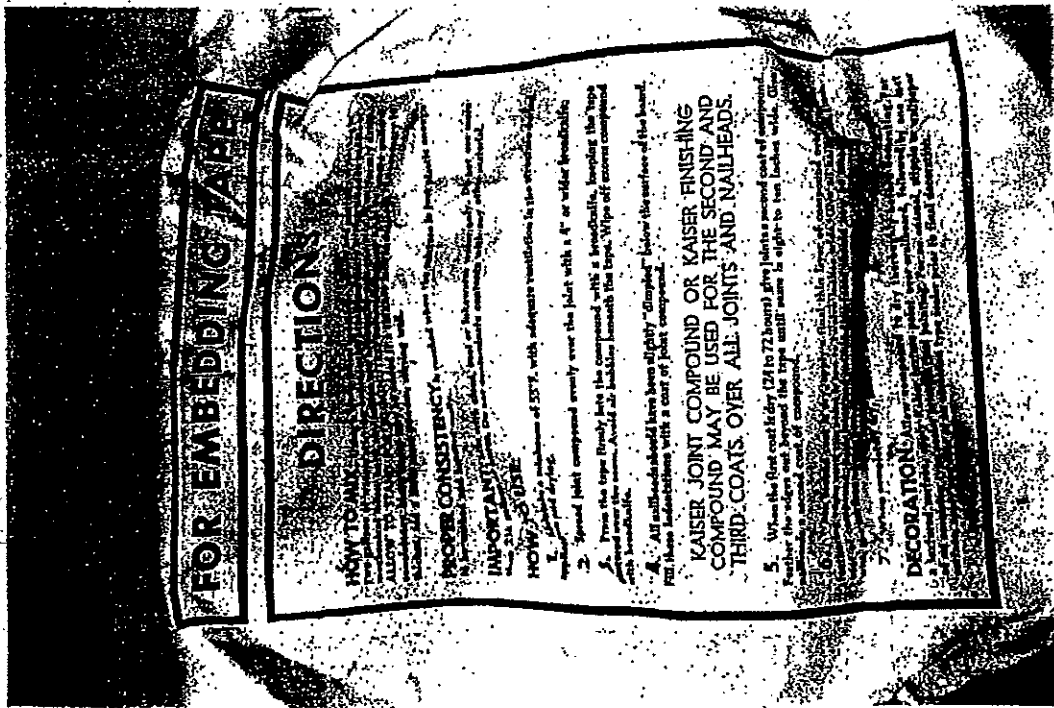

3-51
0043E

PLAINTIFF'S
EXHIBIT
10 EMD
#959478

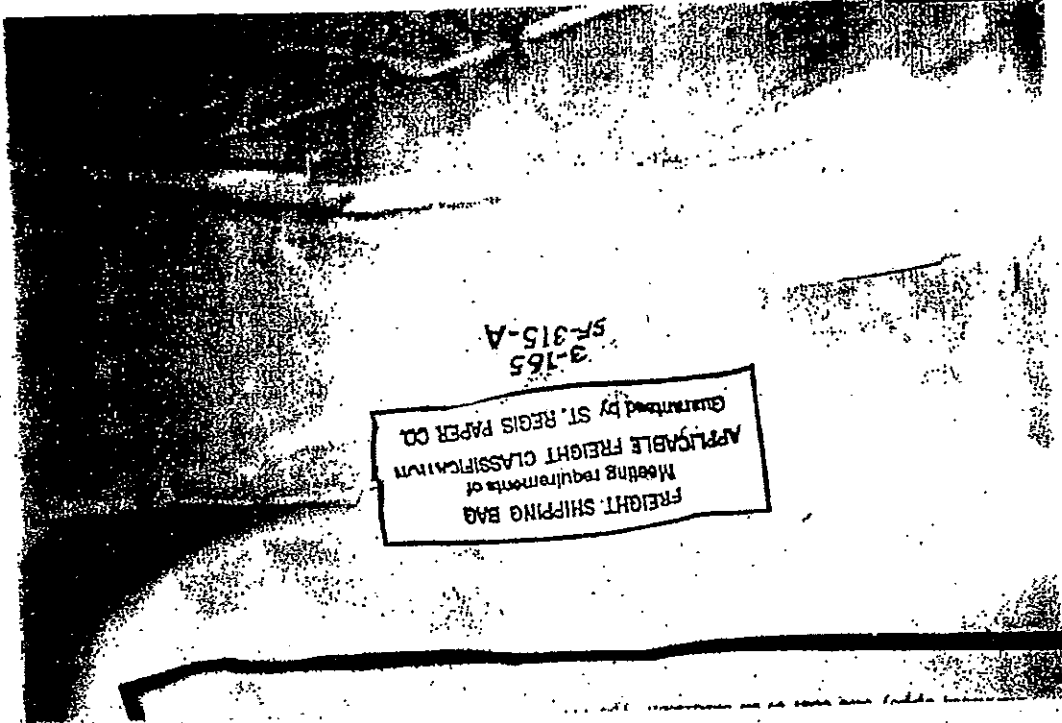

3-765
SF-315-A
FREIGHT SHIPPING BAG
Meeting requirements of
APPLICABLE FREIGHT CLASSIFICATION
Quaranteed by ST. REGIS PAPER CO.



NET WEIGHT

25

POUNDS

A PRODUCT OF

KAISER GYPSUM COMPANY, INC.

3-52

0043F

?



**RED TOP
IMPERIAL
GYPSUM
FINISH PLASTER**

UNITED STATES GYPSUM COMPANY

* REG. U. S. PAT. OFF.



0044

353

PERF-A-TAPE JOINT SYSTEM

CONTENTS: 18 lbs. COMPOUND
250' roll of PERF-A-TAPE

Imperial
TAPE

12 • 300 LIN. FT. PER ROLL

P 335 8764

UNITED STATES GYPSUM
CHICAGO • ILLINOIS

0045

3-54


?



USE NO SAND

IMPERIAL GYPSUM WOOD FIBRE PLASTER

UNITED STATES GYPSUM CO.
CHICAGO

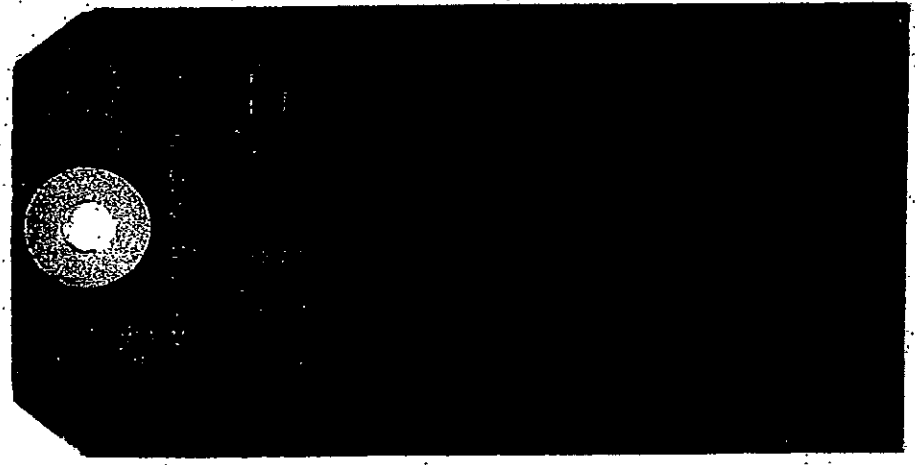

0046

3-55

KAISER GYPSUM WALLBOARD AND ACCESSORIES

DESCRIPTION

Kaiser Gypsum Wallboard is made of noncombustible gypsum panels which are surfaced with a special high-quality manila paper. A wide choice of sizes, types and finishes is offered for use in a broad range of architectural and structural applications.

FUNCTION AND UTILITY. Because gypsum will not burn, gypsum wallboard resists fire, and these wallboard products are rated non-combustible by building and fire insurance authorities throughout the country. Kaiser Gypsum Wallboard has a 0 to 15 flame-spread rating.

ENGINEERED JOINT CONCEALMENT. Permanent concealment of joints is a benefit of the product's excellent dimensional stability. The long edges of most types of Kaiser Gypsum Wallboard are tapered to receive reinforcing tape and joint-filling compounds for complete concealment and smooth surfaces.

CRACK-RESISTANT LONG LIFE. Humidity and temperature have little effect on gypsum wallboard and on joint concealment systems. Unless subjected to unusual structural movement, Kaiser Gypsum Wallboard's excellent surface integrity normally lasts the lifetime of the building.

DECORATION. The high-quality manila face-paper is especially designed to receive decoration—flat or gloss paint, texture paint, wall-paper or fabric. The early decorating possible with gypsum wallboard reduces overall construction time.

WALLBOARD PRODUCT DESCRIPTIONS

PLAIN CORE. Kaiser Gypsum Wallboard is generally used for interior walls and ceilings. Joints between adjacent boards may be reinforced and concealed with Kaiser Joint Compound System.

TYPE X. Kaiser Gypsum Null-A-Fire Type X Wallboard combines the advantages of Plain Core Gypsum Wallboard with improved resistance to fire. The "Type X" core provides greater fire resistance than Plain Core Gypsum Wallboard of the same thickness.

ACOUSTIBAK. Faced on both sides with strong grey paper, Kaiser Acoustibak is used as backing for acoustical tile. This product is furnished in Plain as well as Type X cores. Combined with acoustical products, Acoustibak affords excellent sound attenuation. Where one-hour fire-resistance is required, ½-inch Type X Acoustibak is used. The V-joints do not require tape or filling.

FOILBACK INSULATING. Kaiser Gypsum Insulating Wallboard is made by laminating a sheet of aluminum foil to the back surface. Kaiser Foilback is also an efficient vapor barrier. Vapor permeability is 0.061 to 0.277 perms (compared with 1.00 perms—the maximum allowed by FHA).

MOISTURE-GUARD GYPSUM WALLBOARD

Description—Moisture-Guard is gypsum wallboard made with a special (U.S. Patent 2,604,411) core formulation and special papers for improved water resistance. It is designed for use in "wet" areas, such as shower stalls, around tub enclosures, in kitchens, on exposed exterior soffits, etc.

Moisture-Guard is designed to serve as a base to receive ceramic (or other) tile applied with proper adhesives. Moisture-Guard is ½" or ¾" thick, 48" wide x 8' or 12' long, with tapered edges, tan face paper and black back paper.

Physical Properties—Water Absorption: 10% maximum (by weight). (24-hour immersion, 1" head at 70°F.)

Tile Shear Strength: Dry or wet (per "Water Absorption" above) the shear strength of tile bonded to Moisture-Guard with approved tile adhesives (CS 181-52 Hallmark) exceeds minimum 40 psi requirement.

Core: ½" Regular or ¾" Null-A-Fire (Type X) gypsum core.

Type X Moisture-Guard may be substituted for Type X Gypsum wallboard in fire rated partitions.

Limitations—Should not be used where continuously or repeatedly immersed in water.



GYPSUM WALLBOARD ACCESSORIES

Kaiser gypsum manufactures a complete range of gypsum wallboard accessories for joint treatment, finishing and texturing of walls and ceilings. These include: Joint Compounds—Finishing Compounds • Dual Purpose Pre-mix • Patented—Sill-edge Joint Tape • K-Spray (aggregate ceiling texture) • Cover-tex (wall and ceiling texture) • Laminating Compound.

VINYL WALLBOARD. A standard high quality Kaiser Gypsum Wallboard to which a specially selected decorative vinyl wall covering has been applied over the face of the wallboard and wrapped around the edges. The resulting vinyl finish is tough and durable.

Standard Colors and Patterns—18 are available. See Kaiser Gypsum Movable Partition Systems catalog.

Stipple Finish—Cameo White, Champagne, Tapestry Beige, Chill Blue, Azure, Green Haze, Bay Leaf, Yellow Essence, Antique Gold, Bittersweet.

WALLBOARD DESIGN DATA

Type	Thickness	Standard Widths	Lengths
PLAIN CORE	½", ¾" ¾", 1"	2', 4'	½"-8' ¾"-8' to 14' 1"-6' to 12'
TYPE "X"	½", ¾" Super "X"-½"	2', 4'	½"-6' to 14' ¾"-6' to 12'
ACOUSTIBAK	Plain Core ¾", 1" Type "X"-½"	¾"-2', 4' 1"-½"-2'	4' to 12'
FOILBACK (Insulating)	Plain Core ¾", 1" Type "X"-½"	4'	8', 10', 12'
COREBOARD	1"	23½" 2'	8' to 12' 8' to 12'
VINYL Covered	Plain Core ¾", 1", 1½", 2" Type "X"-½", ¾"	4'	8'
SHEATHING	Plain Core ½" Impregnated Core ¾"	2', 4'	8'
MOISTURE GUARD	½", ¾" Type "X"-½"	4'	8', 12'

- ⊙ 2' Width available on special order.
- ⊙ 7', 9', 10', 12' lengths available as on special order.
- ⊙ Kaiser Wallboard is manufactured in compliance with Federal and ASTM Specifications.

3-56


WALL REPAIR CENTER **KAISER GYPSUM**

Products for patching, repairing and finishing interior walls and ceilings



0048
3-57

The new Profit Producer from Kaiser Gypsum

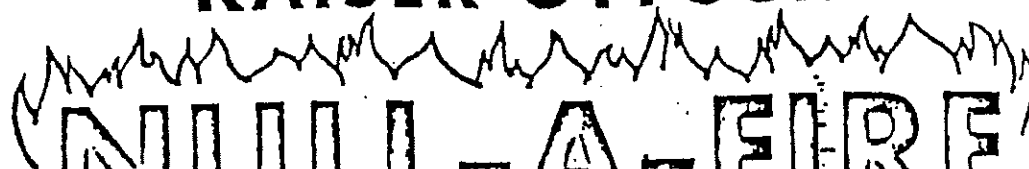KAISER GYPSUM

NULL-A-FIRE
5/8" GYPSUM WALLBOARD

ONE HOUR FIRE RESISTANCE

- NON-LOAD BEARING PARTITIONS
- LOAD BEARING PARTITIONS
- CEILING CONSTRUCTION

0049

A PRODUCT OF



KAISER GYPSUM
 COMPANY, INC.
 LOS ANGELES • OAKLAND • SEATTLE

3-58

NO. 23L



HARRY BEAN

a leading California plastering contractor
uses Permanente Plastic Cement.
Why? Ask and he'll tell you.

KAISER
CEMENT



Ad No. KP-530
½ Page, 1 Color.— California Plasterer & Plastering Industries
1966

0050



3-59

0050A

3-60

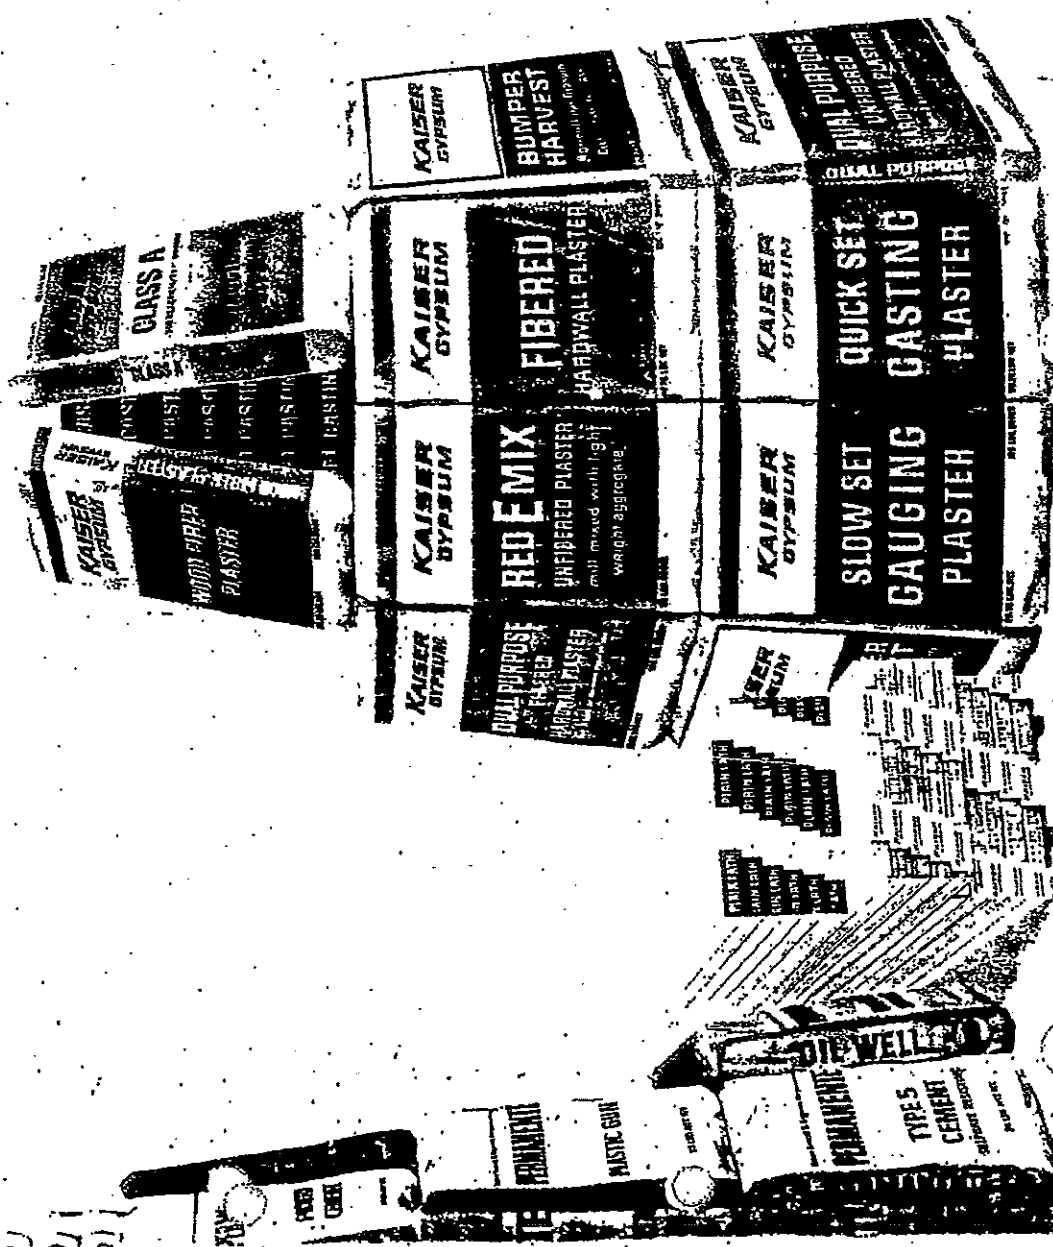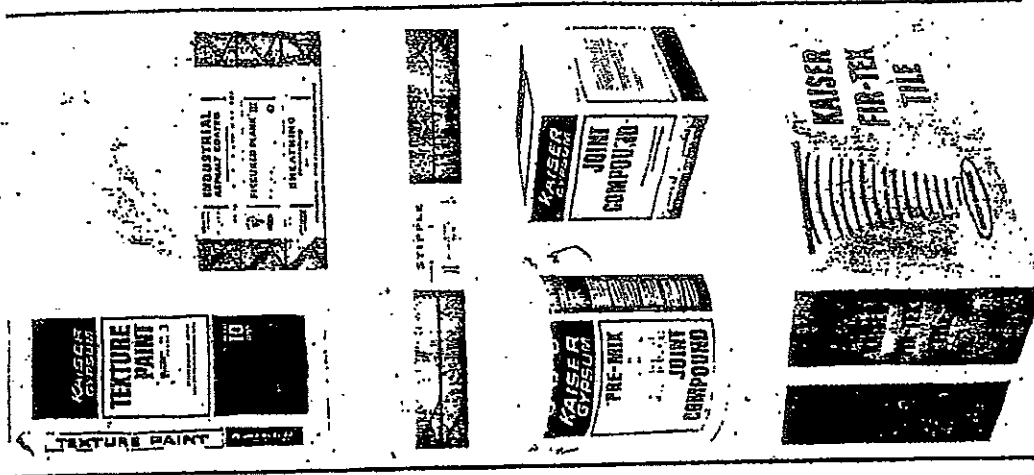

3/60

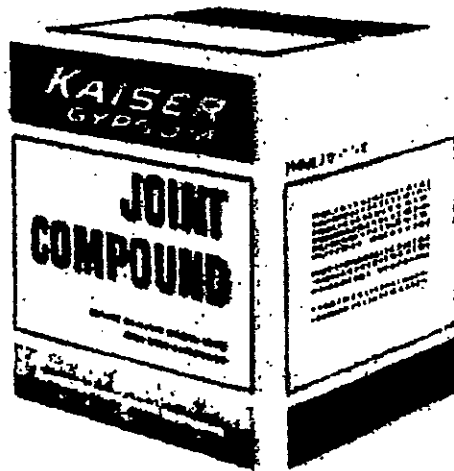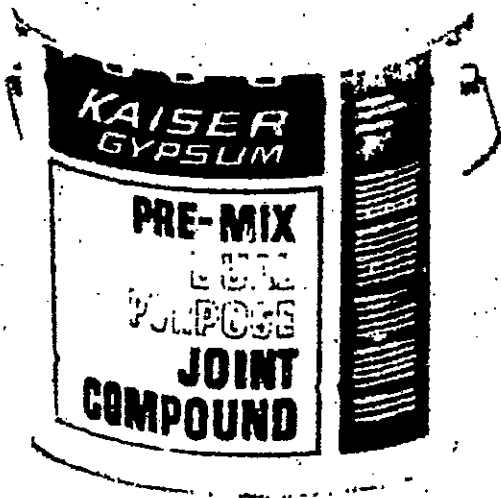

0050B

3-61

**KAISER
GYPSUM**

**3-PURPOSE
JOINT
COMPOUND**

MADE IN U.S.A.
Kaiser Gypsum Co.


0050C

3-62

?



0050D

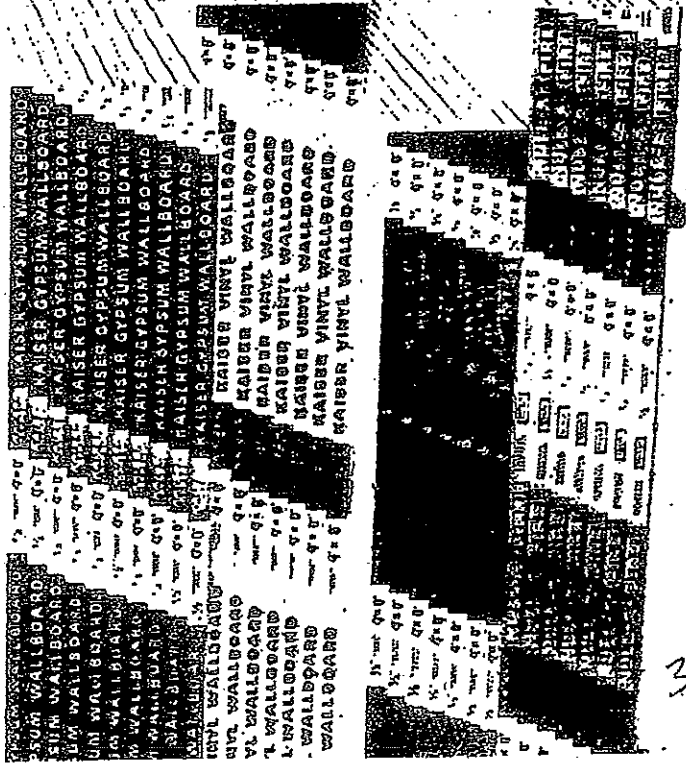

3-63



drywall accessories

Pre-Mix Joint Compound. Pre-Mix Joint Compound is used for filling gypsum board joints, embedding joint reinforcing tape, finishing joints and covering and finishing nailheads and metal cornerbead. Hand or machine applied. Coverage: 62 pounds will cover the joints on approximately 500 sq. ft. of gypsum board surface. Available in 62 pound container, 12 pound container and 50 pound carton.

Pre-Mix Topping Compound. Pre-Mix Topping Compound is used for topping and finishing gypsum board joints. Topping compound provides good workability, minimum shrinkage and easy sanding. Hand or machine applied. Coverage: 62 pounds of topping compound will provide for the joint topping and finishing of approximately 750 sq. ft. of gypsum board. Available in 62 pound container and 50 pound carton.

Three Purpose Compound. All-purpose dry powder compound used for taping, topping and finishing of gypsum board joints, nailheads and metal cornerbead in preparation for final decoration. In addition, it can be used for texturing gypsum board surfaces. Coverage: Three-coat joint treatment will require approximately 75 pounds to cover joints on 1,000 sq. ft. of gypsum board surface. Available in 25 pound bag.

Joint Reinforcing Tape. Perforated paper reinforcing tape with chamfered and slit edges. A high-quality product providing easy bedding with joint compounds and designed to resist joint cracks, blisters, edge cracking, wrinkling and ridging of the joints. Coverage: 500 ft. roll will cover the joints on approximately 1,000 sq. ft. of gypsum board surface. Available in 75, 250 and 500 foot rolls.

Cover-Tex Wall Texture. Cover-Tex is a dry powder wall texture product used to produce a wide range of texture effects when applied over properly prepared gypsum wallboard surfaces. For hand or machine application. Coverage: 50 pounds of Cover-Tex will provide texture coverage over approximately 500 sq. ft. of surface. Available in 50 pound bag.

K-Spray Ceiling Texture. Dry powder K-Spray is a lightweight aggregate texture for use over gypsum board or interior concrete ceilings. It is formulated for excellent white color and hide, easy mixing and easy application. K-Spray is designated for use with large capacity pumping systems which have continuous agitation in paste hoppers to prevent aggregate flotation. Coverage: 32 pounds of K-Spray will provide a 1/4" thick texture for approximately 250 sq. ft. of surface. Available in 32 pound bag.

0050E 3-64

Do's and Dont's

DO

1. Perform regular inspection
2. Perform prescribed lubrication
3. Keep machine clean of dust, especially around motors and air cylinders
4. Make sure work area is clean and free of nails, lumber and debris
5. Keep machine in good repair with approved parts
6. Protect machine against water damage in transit

DON'T

1. Over lubricate
2. Perform maintenance, adjustments or inspection with electrical power connected to machine
3. Overtighten fasteners, steering chain or cutting belt
4. Change factory setting on air compressor check valve
5. Allow cutters to become so dull that they can't be reground
6. Mix reground cutter blade sets

System Components




Radiant Heat Joint Compound




Radiant Heat Surfacing Compound




K-Spray Ceiling Texture




Glass Fiber Building Insulation




Sunwarm "K" Series Heating Cable

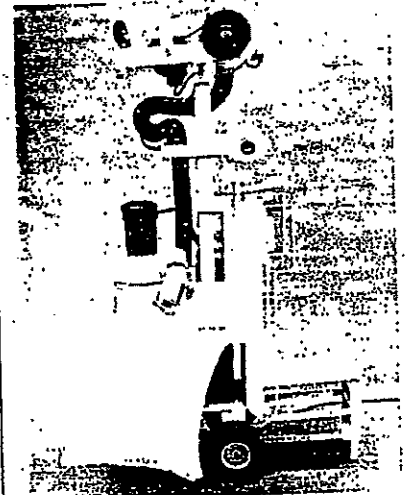

Cable Embedding Machine

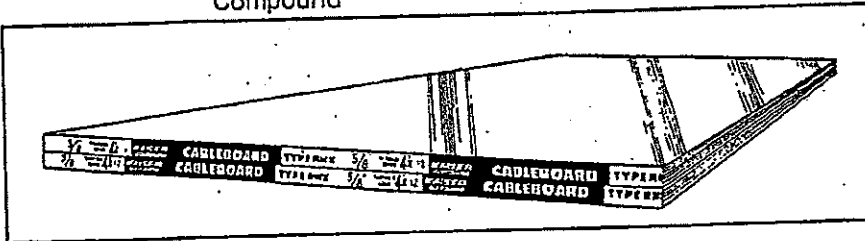

Type RHX 5/8" Cableboard

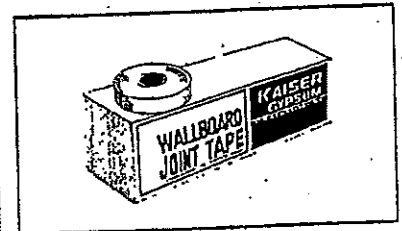

Cableboard Joint Tape

0050F


3-65

**QUALITY BUILDING
MATERIALS**

Gypsum Wallboard and Accessories • Vinyl
Surfaced Gypsum Wallboard • Vinyl Tack-
board • Acoustical Ceiling Tile and Plank
board • Fir-**Tex**® Insulating Board Products • Sus-
pended Ceiling Systems

How to repair
walls and ceilings
in your home

0050G

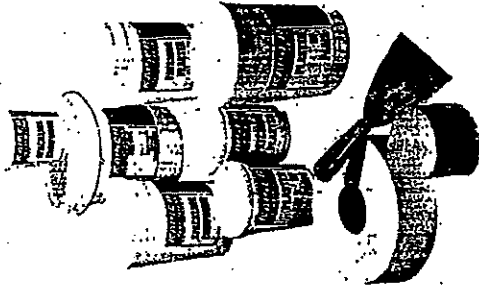

**KAISER
GYPSUM**

PROFESSIONAL-QUALITY
PRODUCTS IN HOME-SIZE
PACKAGES

**KAISER
GYPSUM**

KAISER GYPSUM COMPANY, INC.
300 Lakeside Drive, Oakland, California 94604


KGC-417-3/68

Litho in U.S.A.

© Copyright 1968, Kaiser Gypsum Co., Inc.

3-66

3-66



SAVE MONEY
SAVE TIME
BUY ONLY
WHAT YOU NEED

When a wall or ceiling is damaged, you want to repair it properly the first time. This requires the use of good materials and careful workmanship. You need the same high-quality materials used by professionals. But, there is no need to buy in large amounts.

Now you can buy small, home-repair-size packages containing materials preferred by professional contractors throughout the nation — Kaiser Gypsum patching plaster, spackling compound and joint compound. Each product is packaged in its own reusable, convenient, plastic mixing container.

The Wall Repair Center is stocked with the materials you need to do a home-repair job. There's no need to search all over the store, or to wait for a salesman to serve you. No time is wasted. Just select what you need, and check it out. For professional results, use Kaiser Gypsum materials... Packed in home-repair-size packages.

Kaiser Gypsum Spackling Compound

Spackling compound is a fast-drying material, designed for filling hairline cracks prior to painting. Simply widen the crack with a sharp-edged instrument, wet the surface and apply a paste-like mixture of spackling compound with a putty knife. Sandpaper lightly, after the compound hardens. Then paint or decorate.



Kaiser Gypsum Patching Plaster

This material stays workable longer, and is designed for use when patching holes and large cracks. Cut away all loose and weak plaster or wallboard. Undercut the edges to form an anchor. If a hole goes all the way through the plaster or wallboard, stuff a wad of cheesecloth or newspaper into the opening so the plaster does not fall through. Wet the area to be patched, and apply a thick paste of patching plaster. Work from the edge of the crack or hole toward the center, pressing patching plaster firmly as you go. Smooth the patch. Sandpaper when dry, then decorate.



Kaiser Gypsum Dry Joint Compound


Formulated especially for use with wallboard tape to make perfect joints, Kaiser Gypsum Dry Joint Compound is easy to use. Mix as directed to desired consistency and spread thinly the length of the joint. Center the tape on the joint and press firmly into place. Spread a second layer of joint compound on top of tape and smooth with a broad knife and allow to dry. Add a wider third coat over joint. Smooth with broad knife and sandpaper lightly; then decorate.



Kaiser Gypsum

3-Purpose Premix Joint Compound

This joint compound is factory-blended with the exact amount of moisture to meet professional specifications. Nothing need be added before use. Use directly from container to tape joints, finish and texture walls and ceilings.




Kaiser Gypsum Plaster of Paris

Plaster of Paris generally is not used for patching walls or installing partitions because it hardens too quickly and shrinks a little in the hardening process. However, this material is so frequently used by home hobbyists for making casts, molds and forms that it is included in the Wall Repair Center as a service to customers.



Kaiser Gypsum Wallboard Tape

Tape is used to bridge joints in new gypsum wallboard panels. The correct use of this product prevents the formation of vertical cracks caused by minor shifting of the structure. Edges of Kaiser Gypsum wallboard taper slightly to accommodate the tape and joint compound. A careful taping job cannot be detected after the wall is decorated.



0050H

RED TOP*

AUDICOTE

a new
acoustical plaster



beautiful texture... quickly applied...

LOW-COST APPLICATION ... by either spray or trowel add only water to make a smooth-working plaster. Audicote has exceptional adhesive qualities, bonding to gypsum basecoat plaster, monolithic concrete or other firm, clean surfaces. It is ideal for use in schools, churches, hospitals—wherever beauty and sound-control are desirable.

SOUND-ABSORBENT TEXTURE ... gives Audicote a .60 noise reduction coefficient, maximum. It dries to form a porous, sound-deadening surface; may be hand-brushed or left with an attractive machine-applied texture. Basically mineral in composition, Audicote will not support combustion. Satin White Audicote has .65 light reflectance value, and may be spray-painted without appreciable effect on sound-absorbent qualities.



Ask your U.S.G. Dealer for full details, or write Dept. PL-49,
300 W. Adams Street, Chicago 6, Illinois, U.S.A. P.M. 01.

UNITED STATES GYPSUM

The greatest name in building



00501

3-let

Here Is Your Advance Copy of Our Advertisement
 Scheduled for the Next Issue of The California Plasterer



...not with COLTON "GUN PLASTIC"

Now... a new product that eliminates sand blocks... wastage... guesswork. Colton "Gun Plastic" Cement comes tailor-made for use with the plastering machine... works as well with the trowel as with the gun.

And here's why... asbestos fibers and plastic cement are *scientifically blended* under factory controlled conditions to guarantee that the mix is *right* for the plastering machine. Each sack is uniform with the

(A Plastering Industry First)

right amount of fibers and the right amount of plastic cement to prevent sand blocks... to make all your jobs "profit right!"



Colton "Gun Plastic" Cement is ready for immediate delivery. See your building material dealer... or write... California Portland Cement Company 613 South Flower Street Los Angeles 17, California MICHIGAN 9-5111

0050J

Advertisement Reprinted Original Size Full page size in The California Plasterer Agency Latta and Company 317 North Central Avenue Glendale 3, California

3-69

IX COARSE

A neutral aggregate for adding to interior or exterior oil or latex paints to produce a sand finish. Addition of Ad Mix does not affect the color of the paint.

1 lb. pkg.	6005	12
5 lb. pkg.	6006	10
25 lb. bag	6007	1



EKTO and TREE TRUNK WHITE

A dual-purpose economical exterior cold water paint for semi-permanent work, and for tree trunk application.

25 lb. bag	6012	1
------------	------	---



TRIPLE DUTY JOINT COMPOUND

An economical joint compound and texture that does three jobs on plasterboard: First coat for bedding tape, second and third coats for topping. Available in two sizes and a 4 lb. combination package containing 75 feet of joint tape.

5 lb. pkg.	6015	10
25 lb. bag	6016	1
4 lb. combination	6017	10



VINYL PREP MIX

An all-purpose vinyl joint compound in a ready-to-use form. It is designed for use in reinforcing joints, and concealing joints and nailheads in plasterboard construction.

1 gal. can	6020	4
5 gal. can	6021	1

JOINT TAPE

Specially formulated paper tape with controlled water absorption, minimum stretch and shrinkage. Spark type, with bevelled edges. Works exceptionally well in power and hand tools.

75' roll	6025	20
250' roll	6026	20
500' roll	6027	10

EZE TEX

An economical casein-bound texture paint used by the production applicator.

25 lb. bag	6030	1
------------	------	---



June, 1972

0051

3-70



SYNKO

Drywall Construction Products

TRIPLE DUTY JOINT COMPOUND — An economical Joint Compound and Texturing Compound that does three jobs on plasterboard:

1. First coat to bed the tape.
 2. Topping Compound for the second and third coats.
 3. For texture painting after the joints and nailheads have been prepared.
- Available in 5-lb. pkg. and 25-lb. bag.

VINYL PREP MIX — An all purpose joint compound in ready to use form. VINYL PREP MIX Joint Compound is designed for use in reinforcing and concealing joints and nailheads in plasterboard construction. Available in one- and five-gallon pails.

SYNKO TAPE — A specially formulated paper tape with controlled water absorption and minimum stretch and shrinkage. Bevelled edges. Made in both spark and slit perforated. Works exceptionally well in power tools, as well as hand tools. Use in conjunction with Synko Joint Compound or Synko All Purpose Compounds. Available in 75', 250' and 500' rolls.

SYNKO EZE TEXT TEXTURE PAINT — An economical powder texture paint used by professionals on volume jobs. Application by brush or spray. Average coverage—15 square feet per pound. Available in 25-lb. bag.

0052

THE SYNKOLOID COMPANY
Compton, California 90221 Atlanta, Georgia 30336

09

3-71

SYNKO

VINYL

Tex-Wall

VINYL TEX-WALL SMOOTH & SAND FINISH

GENERAL: Vinyl Tex-Wall beautifies and completely transforms the appearance of any room. Vinyl Tex-Wall not only produces unusual decorative effects, it covers and hides imperfections in the wall better than conventional wall finishes. For that reason, Vinyl Tex-Wall is the perfect decorative finish for plaster walls that are discolored or cracked. Applied over gypsum board, Vinyl Tex-Wall covers and hides taped joints and produces a beautiful texture finish. To completely modernize any room whether it be plaster, gypsum board, cement block or concrete, use Vinyl Tex-Wall.

APPLICATION: Surface to be coated should be free of dirt, chalk, dust or loose plaster. Should any metal be exposed such as nail heads or cornerbead, touch-up with an oil base primer-sealer to eliminate rusting. Use directly from can. Vinyl Tex-Wall can be applied with most any type brush, but a semi-Dutch type is preferable because of the time saving factor.

Do not brush out as is the practice with conventional coatings but apply generously to the surface. The type of texture tool used will depend largely on the type of texture pattern desired. Among the common texturing tools used are sponges, whiskbroom, stippler, brush, metal or celluloid triangle, crumpled newspaper, etc. Excessive texture on woodwork and trim can be easily removed before setting up with a wet sponge.

TINTING: Vinyl Tex-Wall may be tinted with universal tinting colors.

COVERAGE: Approximately 100 sq. ft. per gallon.

CLEAN-UP: Vinyl Tex-Wall is easily cleaned from brush and tools with soapy water.

IMPORTANT: PROTECT AGAINST FREEZING

DO NOT APPLY DURING TEMPERATURE PERIODS OF 50 deg. OR UNDER

CAUTION! Do not take internally. Close container after each use. **KEEP OUT OF REACH OF CHILDREN.**

THE SYNKOLOID COMPANY

COMPTON, CALIFORNIA 90221

ATLANTA, GEORGIA 30324

0053

14

3-72


?

Congoleum

FIRECHECK

VINYL WALL COVERING


Congoleum


KAISER GYPSUM
KAISER GYPSUM
KAISER GYPSUM

NULL-A-FIRE

5/8" x 4' x 8'

KAISER GYPSUM



0054

3-73

7




0055

PLAINTIFF'S 1
 EV. EXHIBIT
 968631

3-74


Y

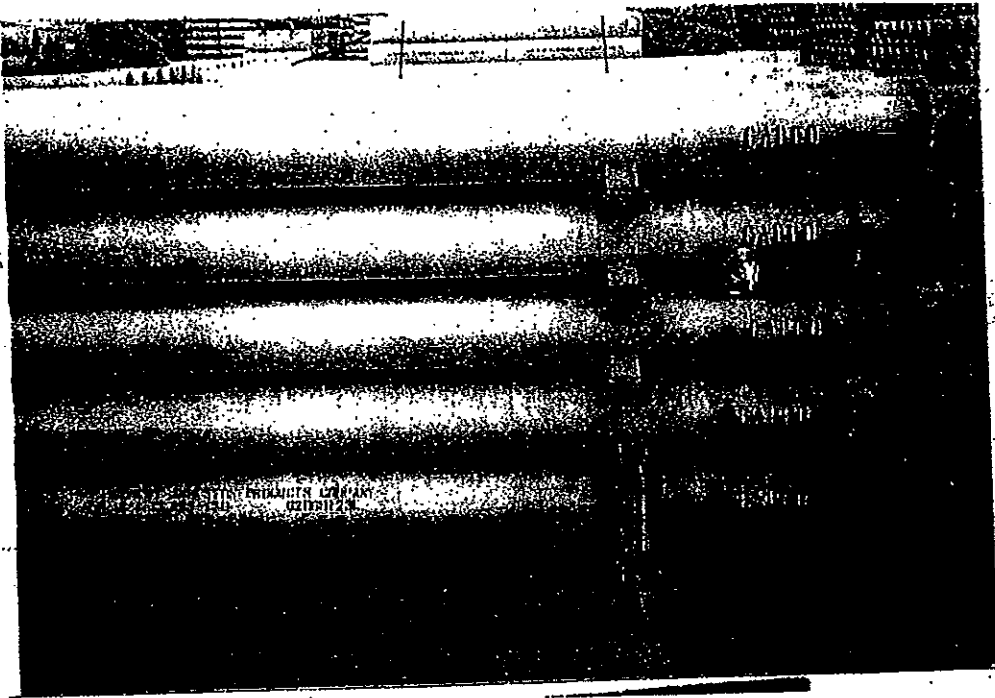

capco PERMAFLEX WATER PIPE MATERIAL SPECIFICATION CA102 69


CA

CEMENT-ASBESTOS PRODUCTS COMPANY

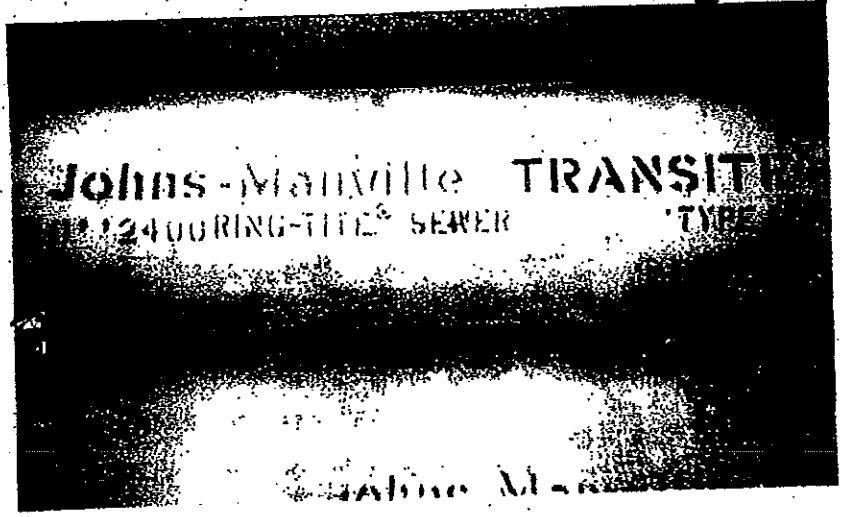

0056
3-75

Y

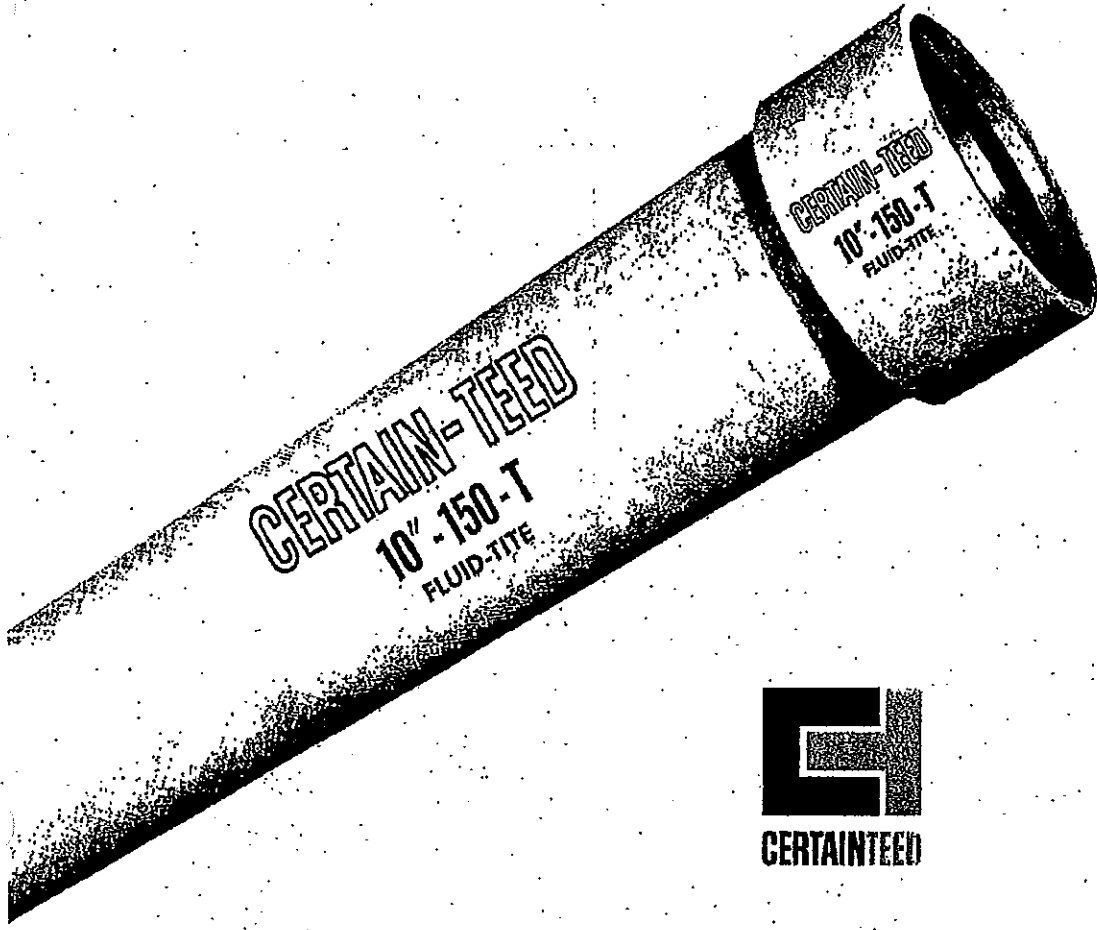


FLUID-TITE®
ASBESTOS-CEMENT
PRESSURE PIPE
SPECIFICATIONS

0057

3-76

4?

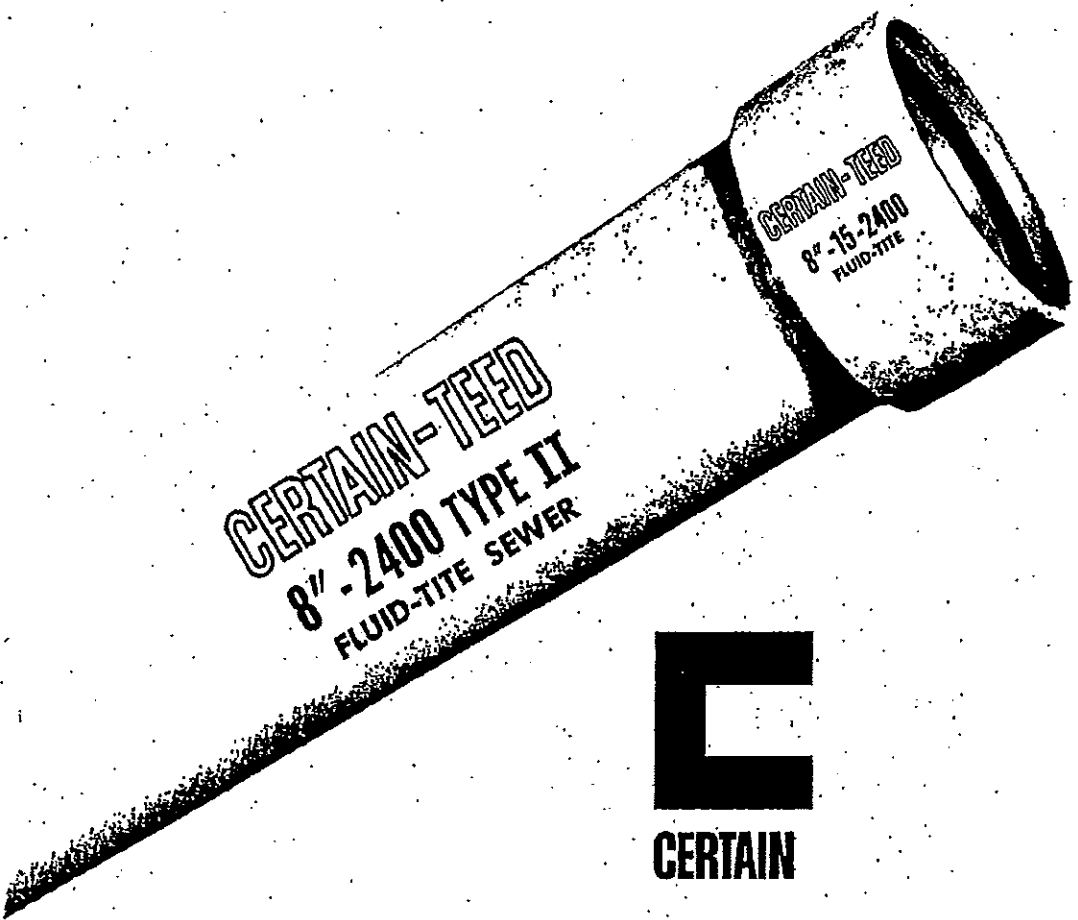

FLUID-TITE®
ASBESTOS-CEMENT
NON-PRESSURE SEWER PIPE
SPECIFICATIONS

0058


3-77

FLUID-TITE.

Asbestos-Cement

SMALL DIAMETER SEWER PIPE

and Accessories

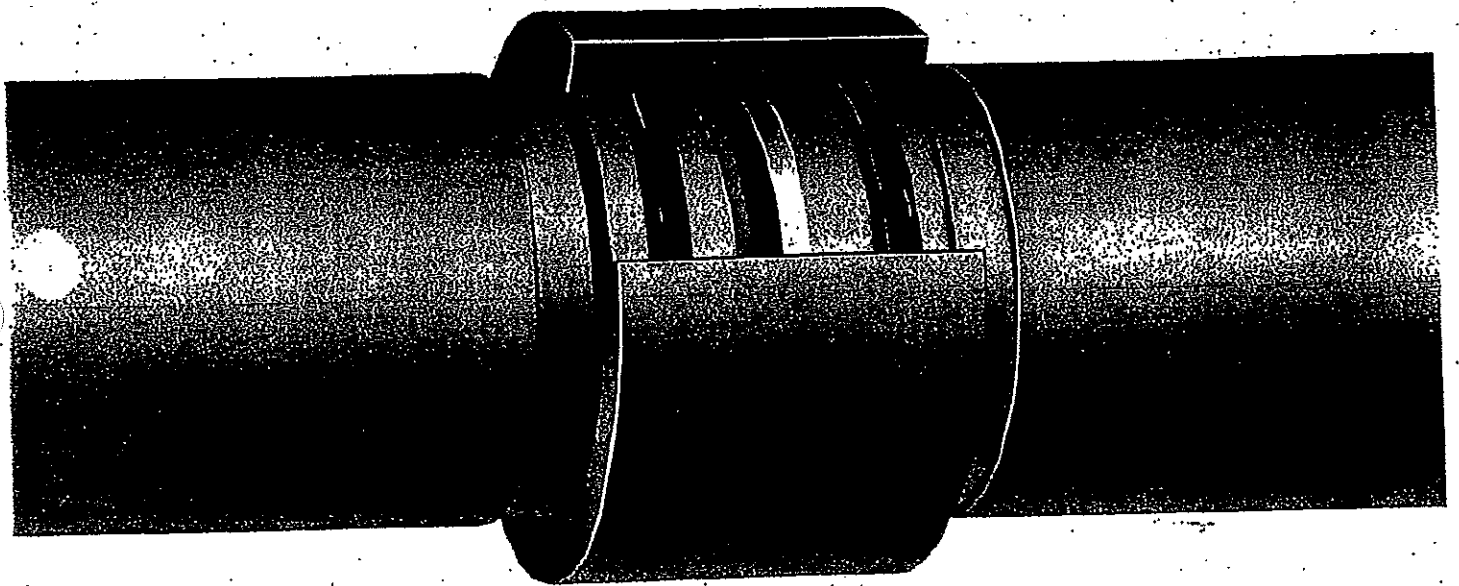


made by

CERTAIN-TEED


PIPELINES FOR THE NEEDS

OF GROWING AMERICA

3-78 0059

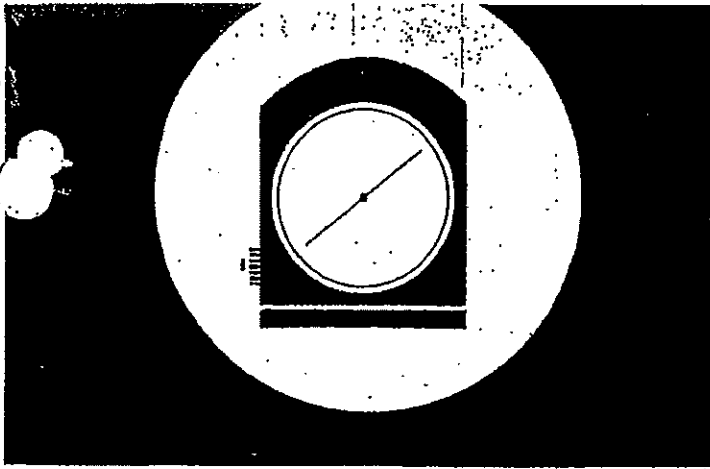

HIGHEST QUALITY—Exacting standards are maintained throughout manufacture. Each length, each coupling is inspected and tested. Result: outstanding performance.

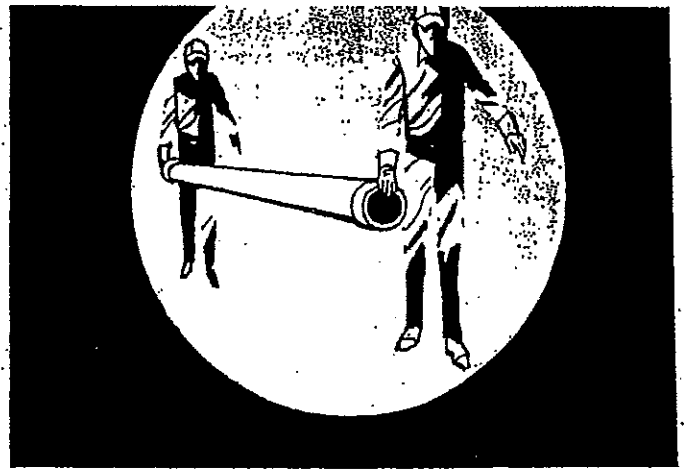


EASE OF INSTALLATION—Lightweight and durable, Certain-teed Asbestos-Cement Pipe goes in fast without need for heavy machinery or special equipment. Can be cut and machined as needed at the jobsite. Result: money saved.



— A GROWING SCIENCE

Mr. St. Clair states: "I purchased Certain-teed Asbestos-Cement Pipe due to its low initial cost, its resistance to corrosion and immunity to electrolysis. My lines have proved to be absolutely trouble-free." He adds: "Since my farm is very level, I use sprinkler irrigation on this flat land, instead of the 'flood system' often used. I can irrigate my fields at a much more uniform distribution of moisture over the entire field, and at a great saving in the amount of water needed." (The pipe is connected to three wells and Mr. St. Clair can irrigate with one or all wells at one time.)

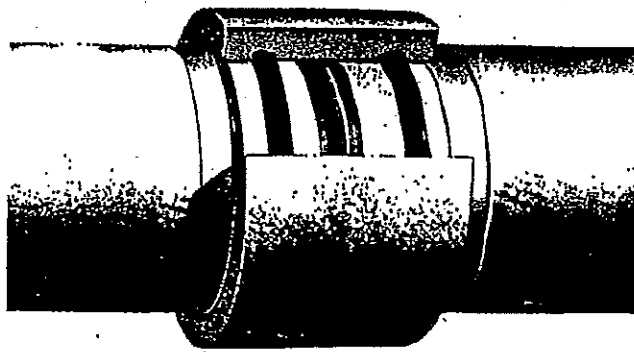

CERTAIN **FLUID-TITE® COUPLING**

This exclusive, patented coupling seals joints immediately and permanently. More pipe can be laid per hour with fewer men... labor required is drastically reduced.

- QUICKER INSTALLATION
- CONNECTS EASILY, EVEN UNDER WATER
- PERMANENT TIGHT SEAL
- ABSORBS VIBRATION
- ALLOWS DEFLECTION AT EACH JOINT
- CERTA-SPACER™ BAND SPACES PIPE ENDS

3-79 0060

?



Gold Bond ASBESTONE
brings new styling, new color to
Asbestos-Cement Roofing and Siding

FLINTKOTE
Roofing and Siding.

3-80

0061

?




asbestos-cement building products


asbestos-cement siding




SUSSEX "42"



DEEP-TEK



CLASSIC-SHAKE



CHOCOLATE



CHROMA-SHAKE

WOOD-GRAIN

corrugated asbestos-cement

Careystone

ROOFING AND SIDING

42 corrugations

also
the asbestos-cement
products

3-81

0062

?

ANOTHER QUALITY PRODUCT FROM NATIONAL Gypsum COMPANY

Gold Bond

CLASSIC-SHAKE SIDING

WITH NEW PLASTICRYLIC FINISH and exclusive PERMANIZING

100. MIX MIX
1/2" x 1/2" x 1/2"
1/2" x 1/2" x 1/2"
1/2" x 1/2" x 1/2"
1/2" x 1/2" x 1/2"




**ASBESTOS
PERMABOARD**

SHEET SIZE: 4' x 8' • THICKNESSES: 3/8" and 1/2"

A flat building board made of asbestos fibers and Portland cement. Excellent for interior and exterior use as walls, ceilings, partitions, siding, soffits, etc. Dozens of applications in the home, on the farm, and in commercial and industrial buildings.

Gold Bond Asbestos PermaBoard is fireproof, termite-proof, rat-proof and weatherproof. It can be scrubbed, scraped and scolded without harm. . . will not rot or corrode. Easily fitted — can be sawed, or scored and broken. Easily applied with nails or suitable adhesives. Joints can be caulked or covered with battens. Needs no protective coating, but can be painted if desired.

Form A-227



3-82

0063

?

COMPLIES WITH FEDERAL SPECIFICATIONS GSA GEN. REG. PAR. 27.141 CLASS A AND BSS

Gold Bond

NON-PERFORATED ASBESTOS PANELS

RIPPLETONE WHITE

NATIONAL GYPSUM COMPANY



Gold Bond

NATIONAL GYPSUM COMPANY


Gold Bond

Gold Bond ripple-tone

3-83

0064

?

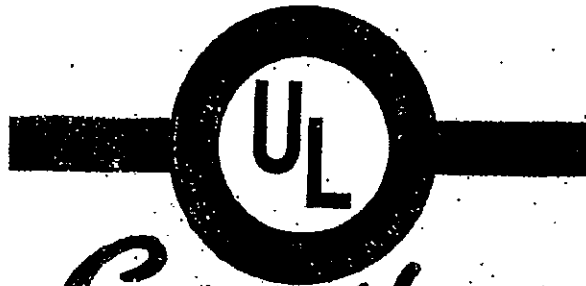

Careystone

ASBESTOS-CEMENT BOARD

THE PHILIP CAREY MFG. CO., LOCKLAND, CINTL. O.

COVERALL BOARD


V-7-2-B 50m 1147

KEEP DRY. DO NOT APPLY THESE SHINGLES
TO DAMP OR WET SURFACE

CAREYSTONE
ASBESTOS-CEMENT
SIDING

3-84

0065

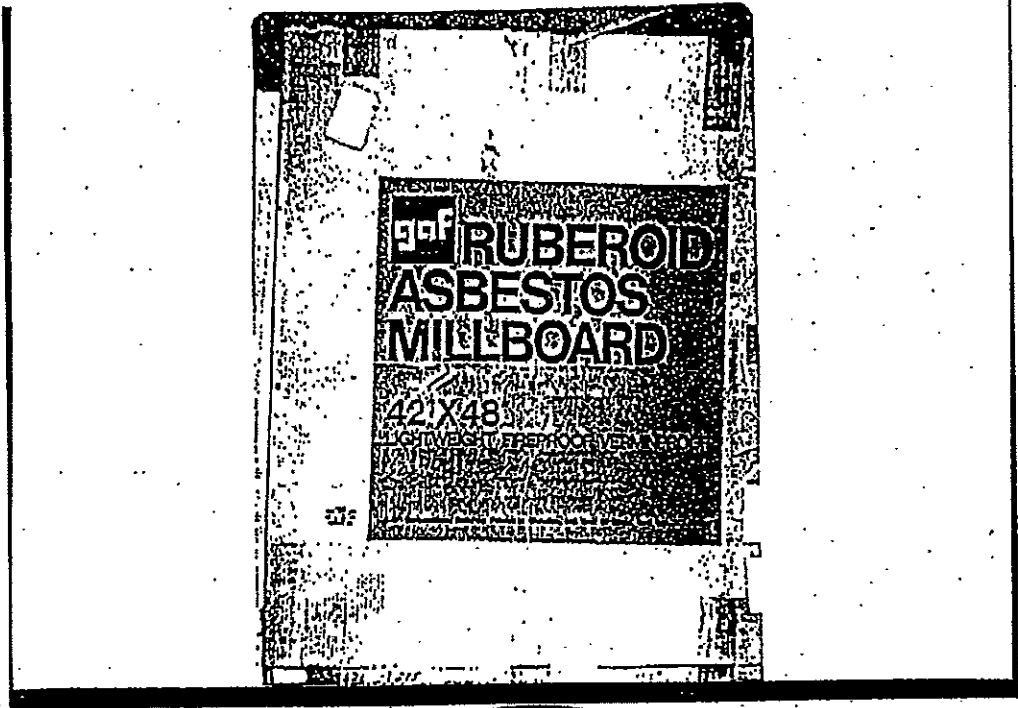

?


Armstrong
ACCOPAC
AD-8024
ASBESTOS PAPER

MADE IN U.S.A. PATENT 2,550,433

An extremely uniform and flexible asbestos paper offering superb handleability. Die-cuts cleanly, seals under moderate flange pressures.

Gauge | 5q. Yds.

3-85

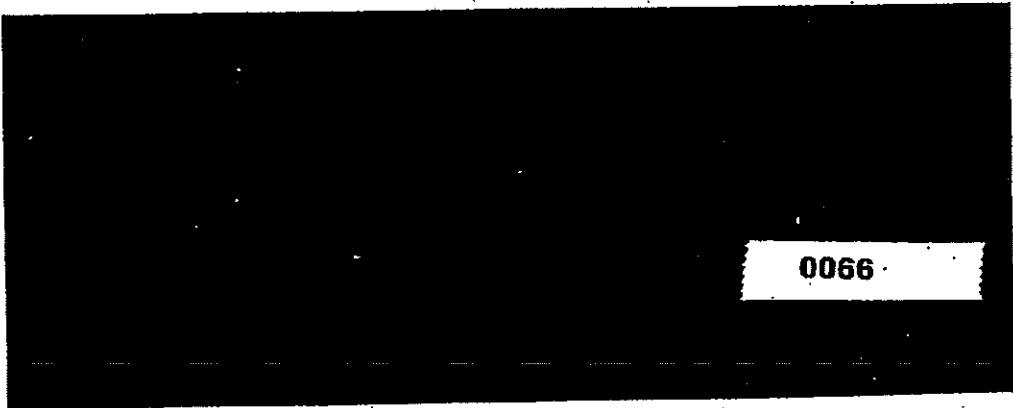


0066

For

GARLOCK

STYLE NO.

RING PACKING.



REGISTERED U.S. PAT. OFFICE
GREAT BRITAIN, CANADA,
NEW ZEALAND AND
AUSTRALIA

THE GARLOCK PACKING CO.


Weight.....Lbs.....Oz.



GARLOCK

STYLE NO. 150

High Pressure Spiral Packing

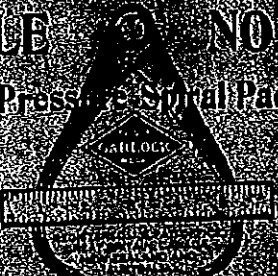


REGISTERED U.S. PAT. OFFICE
GREAT BRITAIN, CANADA,
NEW ZEALAND AND
AUSTRALIA

THE GARLOCK PACKING CO.


SIZE	LBS	OZ

3-86

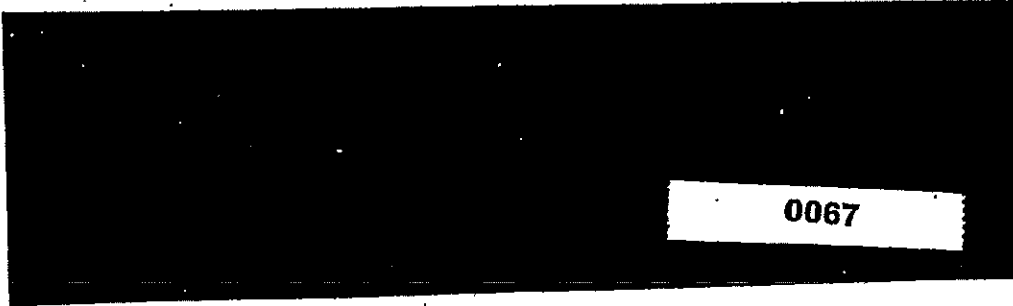

0067

?



Flexitallic
BLUE SPIRAL WOUND
FLANGED JOINT TYPE GASKETS


TO REORDER GIVE ALL DATA ON THIS TAG

QTY. DWG. I. D. O. D. THICK

ITEM METAL FILLER
304 SS ASB
P.O. # INVOICE #

OTHER: _____


FLEXITALLIC GASKET CO. INC. P.O. BOX 680, CAMDEN, N.J. 08102

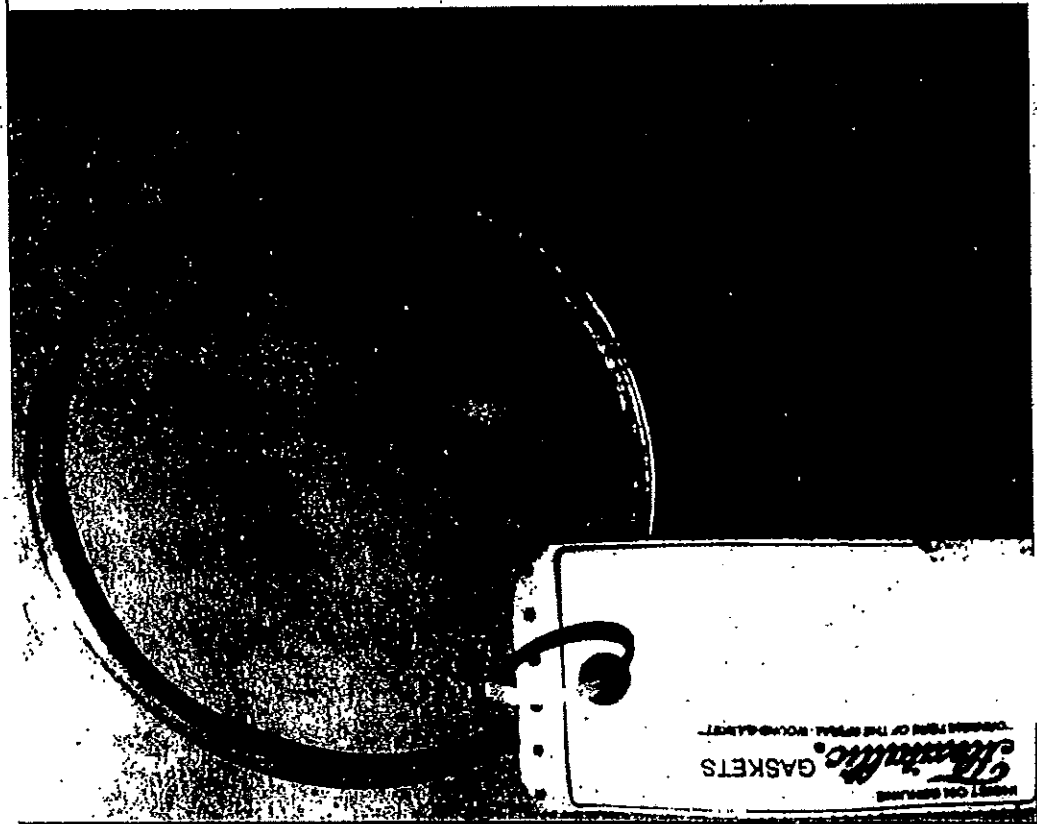

0068

3-87

?

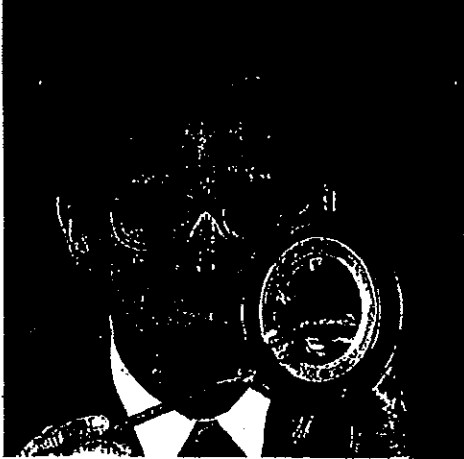

Problem-Solving Experience
It's common to ASME members and to Flexitallic Gaskets

The problem-solving experience of a member of the American Society of Mechanical Engineers is a direct result of his or her active participation in the pursuit of engineering excellence and of his or her membership in ASME. The problem-solving experience of Flexitallic Gaskets is based on more than 50 years of service to industry and on the company's reputation for providing the highest quality gaskets and seals for the most demanding applications.

Flexitallic has been recognized by ASME as a leader in problem-solving experience for more than 50 years. The company's reputation for providing the highest quality gaskets and seals for the most demanding applications is based on more than 50 years of service to industry and on the company's reputation for providing the highest quality gaskets and seals for the most demanding applications.

Flexitallic Gaskets are available in a wide variety of materials and designs to meet the most demanding applications. The company's reputation for providing the highest quality gaskets and seals for the most demanding applications is based on more than 50 years of service to industry and on the company's reputation for providing the highest quality gaskets and seals for the most demanding applications.

Flexitallic SPIRAL-WOUND GASKETS
FLEXITALLIC GASKET COMPANY, INC. General Office and Plant P.O. Box 201, Canton, N.Y. 14810 Phone 716-663-1133 • Telex Post-Plant 7-0, Box 201, Canton, N.Y. 14810

0069 3-88

NEG. NO. O-8A

TRADEMARK FILE INFORMATION


Trademark:	Design - Gasket
Trademark Owner:	Flexitallic Gasket Company
Last Assignee:	Flexitallic Gasket Company, Inc.
Date of First Use in Commerce:	January 19, 1951
Registration No.:	721,010
Date Trademark Registered:	September 5, 1961
Size of Label in Trademark File:	N/A



Receipt of Pictured Label by Patent Office:

Flexitallic®

BLUE

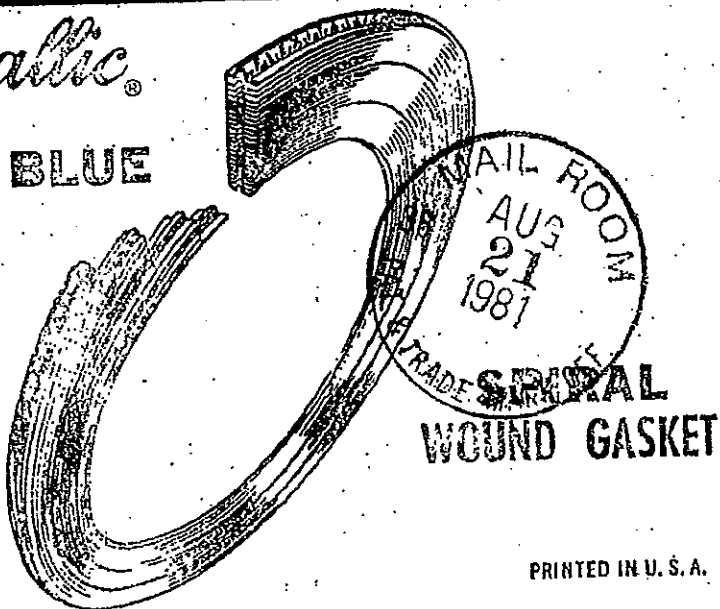

PRINTED IN U. S. A.


0070 389



AMFLEX-PACKINGS

Reg. U.S. Pat. & TM. Off.

For _____
The Anchor Packing Company



THE ANCHOR PACKING COMPANY


Reg. U.S.



Pat. Off.

Style

ANKOTALLIC

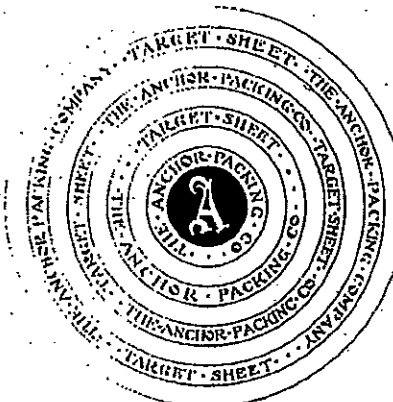

0071

3-90

The Anchor Packing Company

The Anchor Packing Company

The
Anchor Packing Co.


Style No. **ANKLON**
RING PACKING

Use only on _____

Form 412-© D20 Printed in U. S. A.

A

THE ANCHOR PACKING COMPANY

Pat. U.S.  Pat. Off.

Style **ANKLON**


SPIRAL PACKING

Size _____ Weight _____

11324 474 MADE IN U.S.A.

0072

3-91



THE ANCHOR PACKING COMPANY


Pat. U.S. Pat. Off.

Style **VY-FLEX**

SPIRAL PACKING

Size: _____ Weight: _____

FORM 424 MADE IN U.S.A.



The Anchor Packing Co.

VY/FLEX





Style No.

RING PACKING

Use only on

.....

.....

Form 412-© D20 Printed in U. S. A.

0073 3-92



THE ANCHOR PACKING COMPANY




Style **ANKLON**

SPIRAL PACKING

Size _____ Weight _____

11329-424

MADE IN U.S.A.

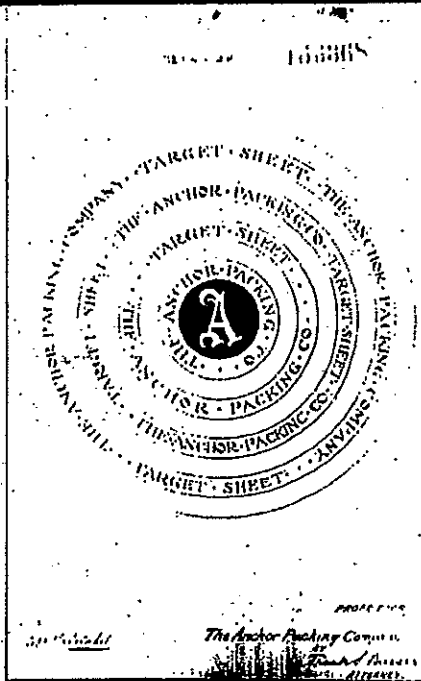

3-93 0074

JOHN CRANE PACKING

MINI-T-PAK

1500 RINGS

#AS-10

1 x 1-1/2"

ITEM 5

PT. #202-01-0150-0100

JOHN CRANE PACKING COMPANY, MORTON GROVE, ILL.

METALLIC • PLASTIC • FABRIC

JOHN CRANE

CHEMLON

STYLE

WEIGHT

SIZE

JOHN CRANE PACKING COMPANY, CHICAGO 13, U.S.A.

0075

3-94



 Rite-Pak PACKING STYLE 810 SPOOL FORM 5 lb. APPROX.		SERVICES Medium speed rotary shaft applications to 1800 FPM. For hot or cold water, cold oils, mild caustics or acids and similar services. Temperatures: to 500°F. pH range: 6-8.
		MATERIALS Square braided from high quality Canadian asbestos yarn. Impregnated with a high flash point lubricant and graphite.
SIZE	LENGTH	
CRANE PACKING COMPANY MORTON GROVE, ILLINOIS 60053		

3-95

0076

?

Armstrong
ACCOBEST
AS-474

MADE UNDER U.S. PATENT 2,759,812

AS-474 is the only best-saturated control swell asbestos product.
 It offers improved torque retention and sealability at higher
 temperatures in gasoline and oil environments.

Gauge Sq. Yds.

U.S. PATENT 2,759,812


Armstrong
ACCOBEST AS-8073
CONTROLLED HIGH-SWELL
GASKETING MATERIAL

SBR rubber latex combined with asbestos fiber
 in a high-density material for service in
 high-temperature, high-pressure applications.
 Recommended where a "swelling" gasket is required.



Gauge Sq. Yds.

U.S. PATENT 2,759,812


3-96

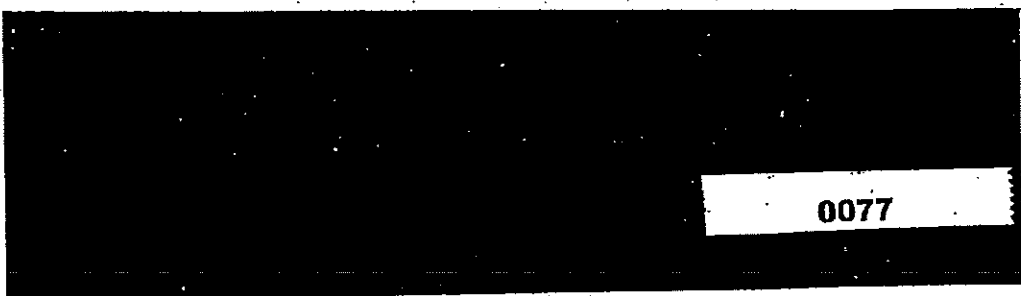

0077

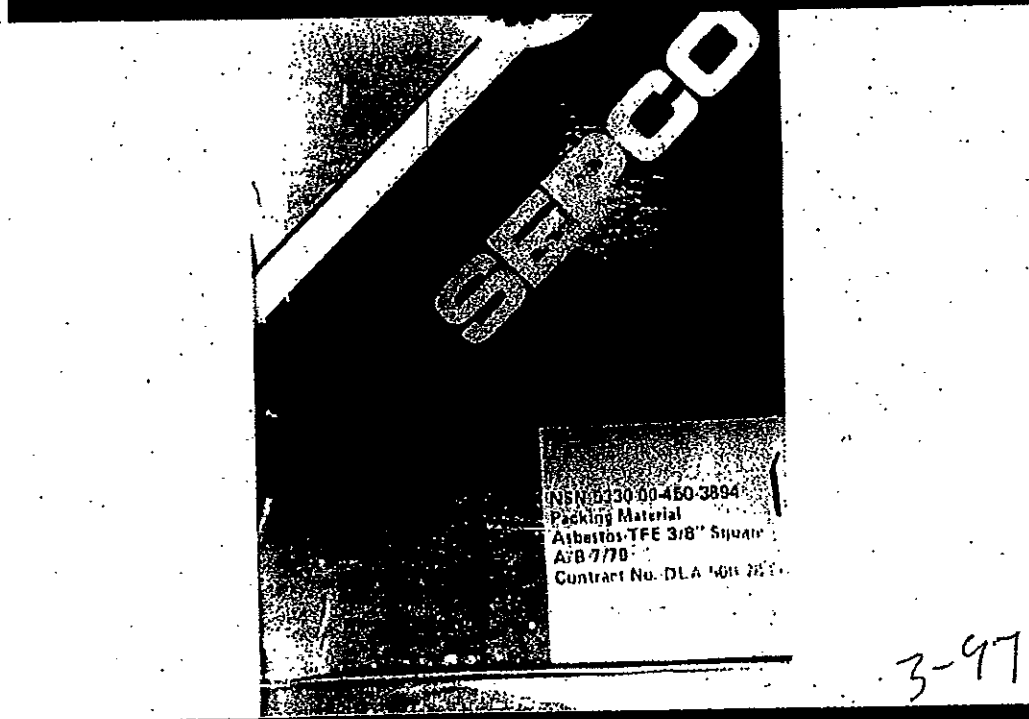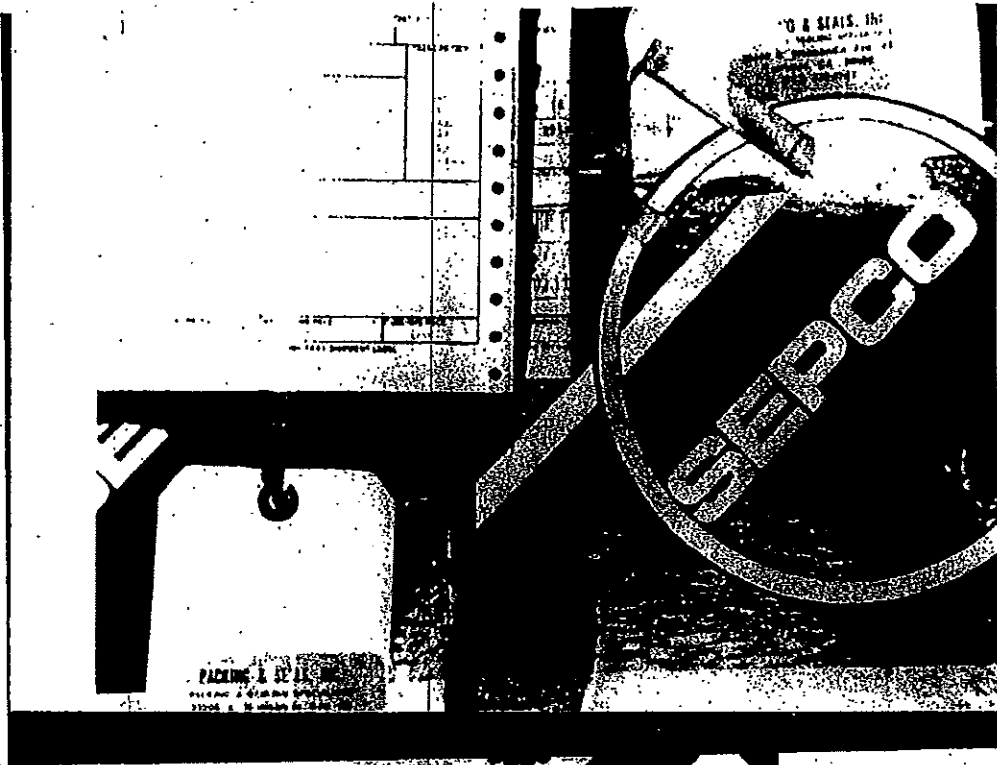

3-97

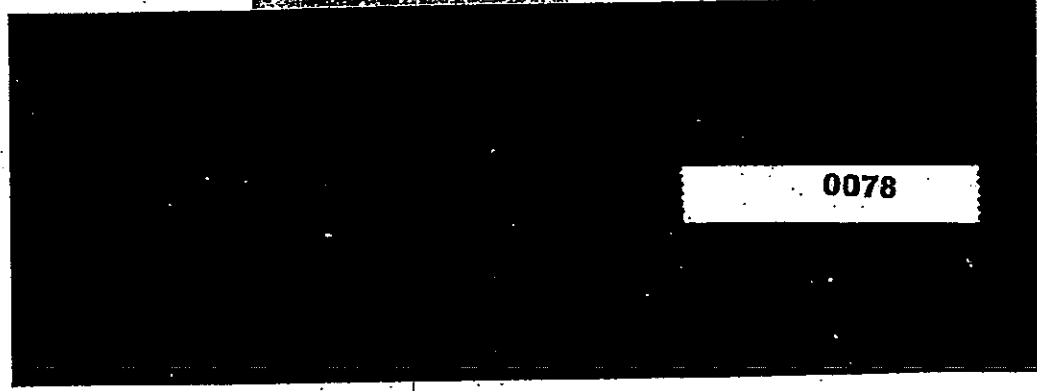

DURAMETALLIC CORPORATION

PRINTED IN U.S.A.

2104 FACTORY STREET
KALAMAZOO, MICHIGAN 49001

ENGINEERED SEALING SYSTEMS



FACTORY ORDER

PURCHASE ORDER NO.

SHIP TO


Form No. A13.9


RETURN POSTAGE GUARANTEED

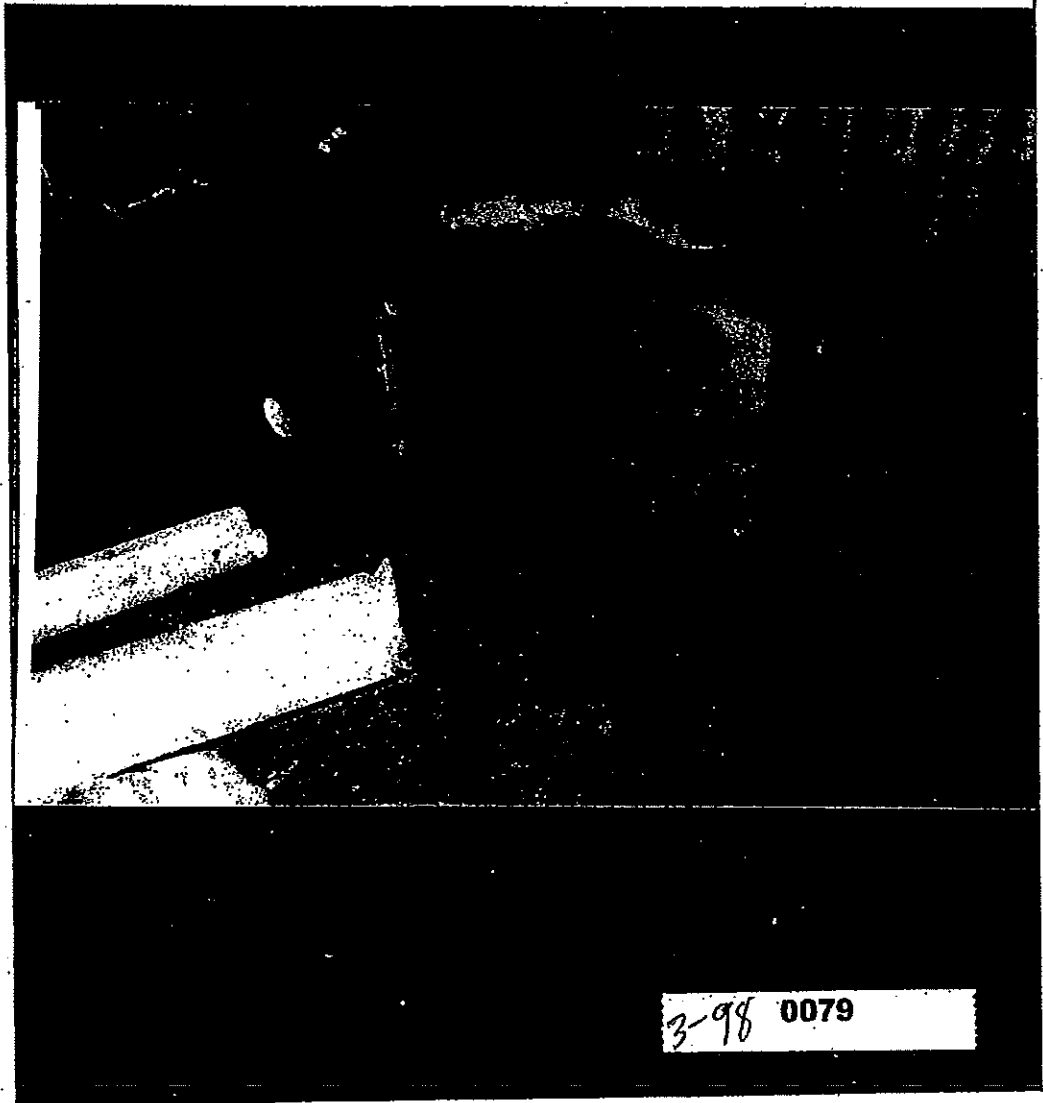

Durametallic Packings

?

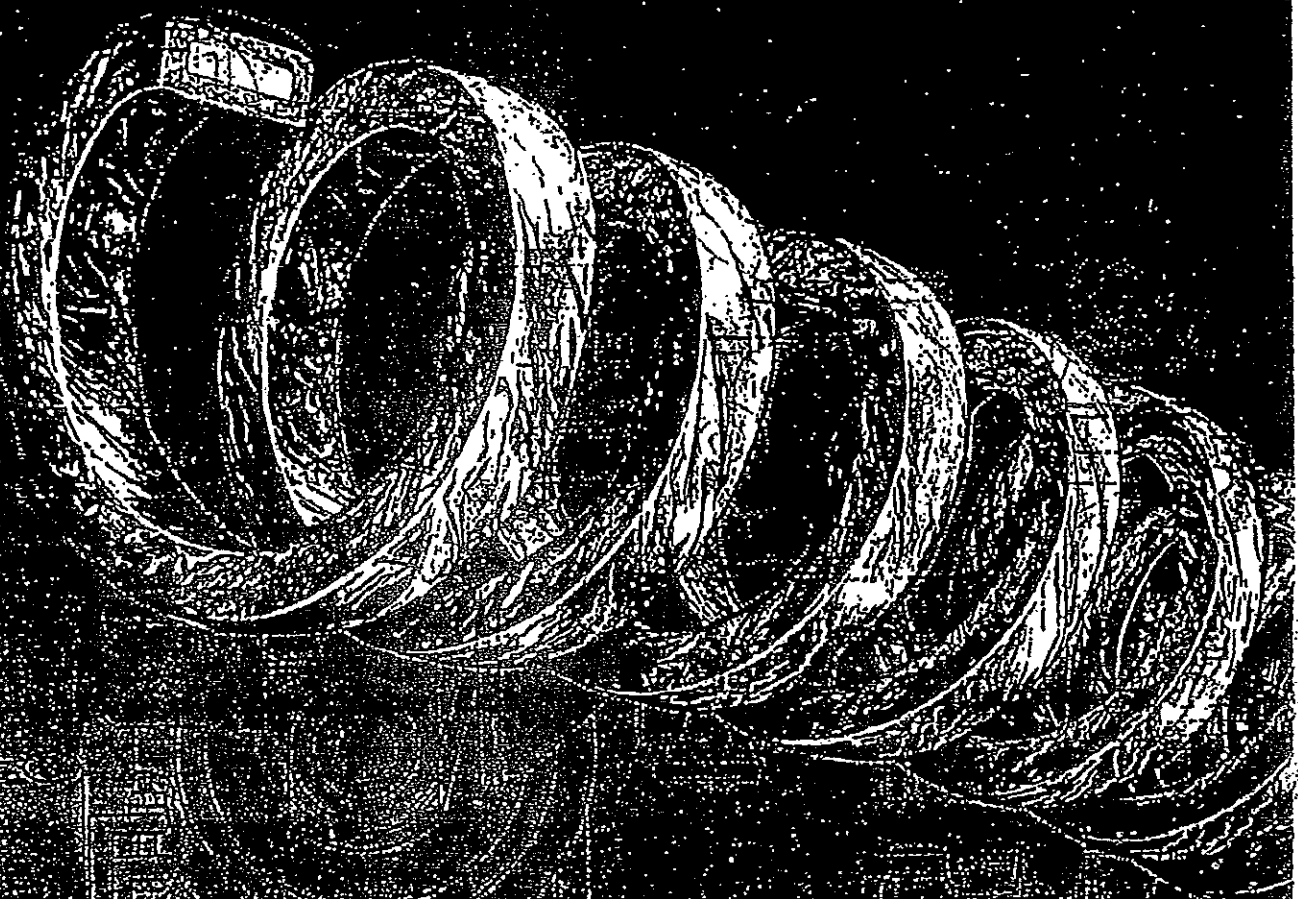

DURAMETALLIC  **CORPORATION**
KALAMAZOO MICHIGAN

0079A
3-29

DURAMETALLIC



"THE PACKING THAT IS ENGINEERED FOR THE JOB."



DURAMETALLIC CORPORATION is the originator of a twisting procedure which wraps specially treated, lubricated, and crinkled foil sheets upon themselves to render packing products which are anti-frictional, self-lubricated, and resilient. They are similar to a bearing or akin to a ground joint.

DURAMETALLIC FOIL PACKINGS were introduced to industry better than a half century ago. This concept in the field of packing received immediate acceptance and became prevalent with the process industries of our nation. Our best testimonial is its continuous popularity and use in meeting present day stuffing-box requirements. Being dedicated to producing ever better sealing products, Durametallic packings have been improved whenever possible with the use of new materials and techniques as they become available, to meet the greater demand occasioned by higher operating speeds, pressures and temperatures.

DURAMETALLIC PACKINGS are available in spiral and die molded ring form. Various types and styles are illustrated and described in the following pages. Specification tables listing sizes, weights and lengths are provided on the respective pages.

DURAMETALLIC SEALING products are sold and serviced throughout the world by experienced field representatives. The Corporate Headquarters and Manufacturing Center are located in Kalamazoo, Michigan.

3.A. Branch manufacturing plants and subsidiaries are located in Los Angeles; Baton Rouge; Charlotte, N.C.; Houston; Morris Plains, N.J.; Canada; Brazil; Mexico; Europe and India. Stocks of Durametallic packings are maintained in San Francisco; Chicago; Tulsa; Appleton; Wis.; Ponce, Puerto Rico; Port Neches and Freeport, Texas. Sales offices are located near most principal cities.

0079B

3-100

Packings


BRAIDED GRAPHITE FILAMENT PACKING

OUTSTANDING THERMAL CONDUCTIVITY

DESCRIPTION

TYPE GL

ite filament yarn with interlock-aid, square in cross section. gland pressure is needed. After t break-in period, the packing es bearing like. Unlike many gs, simply add packing rings ntain full stuffing-box volume. ecking rings should not be de- l by excessive gland pressure. raphite filament is slightly im- sted with TFE dispersion.

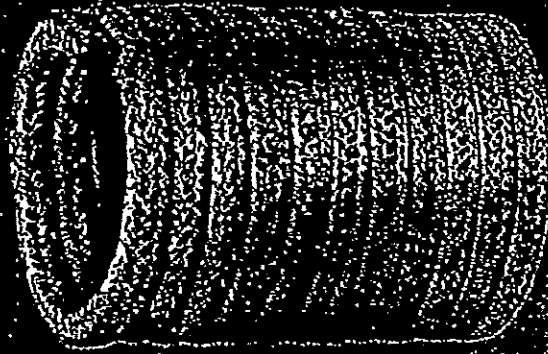

STYLE GL-100

oided rings of GL. Pre-formed ual rings and/or ring sets. Sets apped and labeled for storage dy for installation when needed.

RECOMMENDED USES

TEMPERATURES: STABLE IN AIR UP TO 650° F.
IN ABSENCE OF AN OXIDIZING AGENT,
UP TO 1200° F.

Inert to most chemicals except strong oxidizing agents such as liquid oxygen, fuming nitric acid, hot fuming sulphuric acid and dichromates. Handles chlorinated hydrocarbons, plastics, fatty-acid, tars, inks and resins.

HOW TO ORDER

AL: When several spools are required, specify type (GL) and quantity of spools desired on the order.

Spooling size and length are specified on the order. The order should specify the diameter of the stuffing box and the diameter of the gland nut.

When ordering, specify the type of gland nut and the diameter of the gland nut. The order should specify the diameter of the stuffing box and the diameter of the gland nut.

SPECIFICATIONS

Type GL Available in #1 and #5 Spools.

Size Packing Space	Approximate Feet Per #1 Spool	Approximate Feet Per #5 Spool
1/4"	30'	150'
5/16"	20'	100'
3/8"	14'	70'
7/16"	10'	50'
1/2"	8'	40'
9/16"	6 1/2'	33'
5/8"	5'	25'
11/16"	NA	20'
3/4"	NA	18'
7/8"	NA	13'
1"	NA	10'


NA indicates — not available in these sizes

3-101

Packings

INCONEL WIRE INSERTED BRAIDED ASBESTOS PACKING

A HIGH TEMPERATURE VALVE STEM PACKING

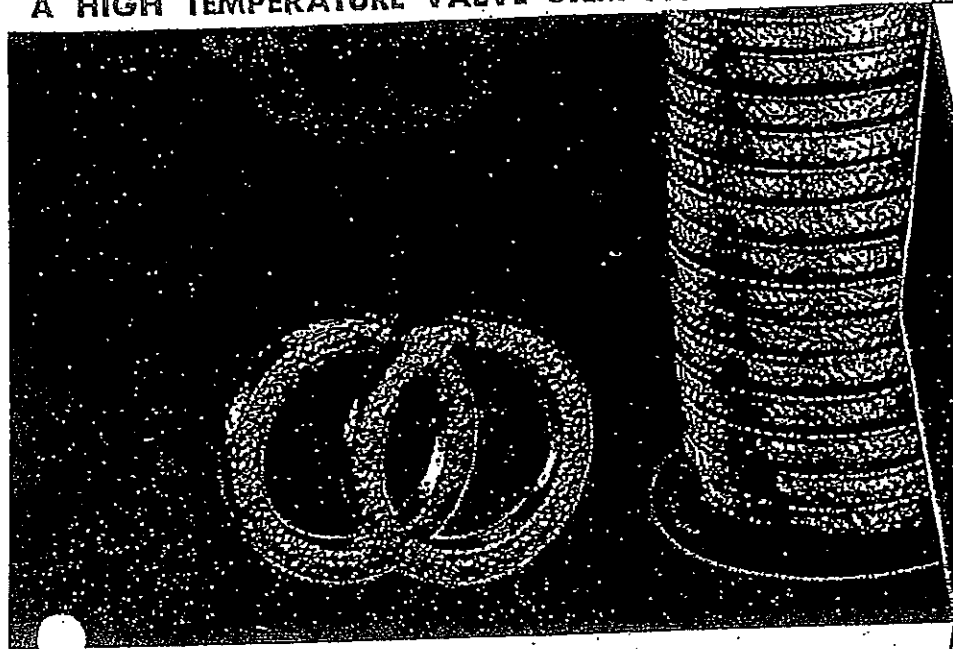

DESCRIPTION

TYPE AW

High quality braided asbestos jacket over a corrosion resistant core with inserted Inconel wire renders a spiral packing with strong tensile strength which requires little gland adjustment. The graphite lubricant provides an antifrictional packing for easy movement of the valve stem. A corrosion inhibitor protects the stem from damage after hydrostatic test until placed in service.

STYLE AW-100

Die-molded rings of type AW. Pre-formed individual rings and/or ring sets are available to fit the stuffing-boxes of your equipment. Sets are wrapped and labeled for storage — ready for installation when needed.

RECOMMENDED USES

TEMPERATURES UP TO 1200° F.

For valve stem and expansion joints.

Excellent for handling steam, air, water, hot gases and oils.

SPECIFICATIONS

Type AW Available in #1 and #5 Spools.

Size Packing Space	Approximate Foot Per #1 Spool	Approximate Foot Per #5 Spool
1/8"	66'	NA
3/16"	28'	NA
1/4"	20'	100'
5/16"	13'	65'
3/8"	9'	45'
1/2"	6'	30'
5/8"	NA	21'
3/4"	NA	15'
7/8"	NA	12'
1"	NA	10'

NA indicates — not available in those sizes

HOW TO ORDER

Specify when ordering spool packing the desired quantity of spools and the size of the stuffing box required.

Notes: 1. Ring sets are shipped in the stuffing box they will fit. 2. The stuffing box size is not the same as the valve stem size.


When ordering rings the stuffing box size of packing and the number of rings to be ordered.

3-102 0079D

Packings

INCONEL WIRE INSERTED BRAIDED ASBESTOS PACKING

A HIGH TEMPERATURE VALVE STEM PACKING

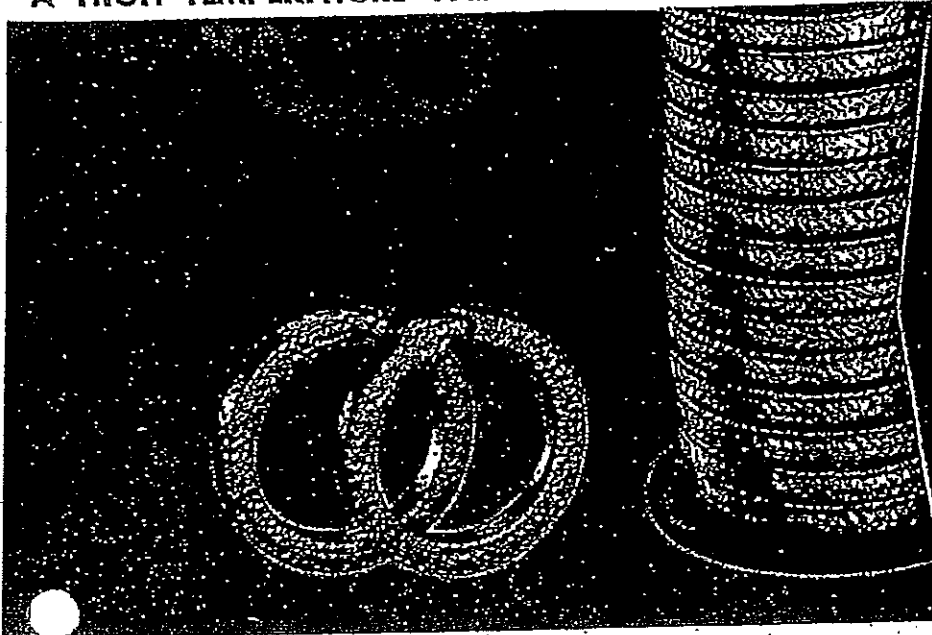

DESCRIPTION

TYPE AW

High quality braided asbestos jacket over a corrosion resistant core with inserted inconel wire renders a spiral packing with strong tensile strength which requires little gland adjustment. The graphite lubricant provides an antifrictional packing for easy movement of the valve stem. A corrosion inhibitor protects the stem from damage after hydrostatic test until placed in service.

STYLE AW-100

Die-molded rings of type AW. Pre-formed individual rings and/or ring sets are available to fit the stuffing-boxes of your equipment. Sets are wrapped and labeled for storage — ready for installation when needed.

RECOMMENDED USES

TEMPERATURES UP TO 1200° F.

For valve stem and expansion joints.

Excellent for handling steam, air, water, hot gases and oils.

SPECIFICATIONS

Type AW Available in #1 and #5 Spools.

Size Packing Space	Approximate Feet Per #1 Spool	Approximate Feet Per #5 Spool
1/8"	66'	NA
3/16"	28'	NA
1/4"	20'	100'
5/16"	13'	65'
3/8"	9'	45'
1/2"	6'	30'
5/8"	NA	21'
3/4"	NA	15'
7/8"	NA	12'
1"	NA	10'

NA indicates — not available in those sizes

HOW TO ORDER

Specify when ordering a spool of packing the desired quantity, type, size, the quantity of spools and the size of the packing required.

Specify if required, the desired size of the glands for the valve stem and stuffing-box type and — all other conditions, such as the desired quantity of packing and the desired quantity of packing and the desired quantity of packing.

0079E

3-103

Carey

?

TEN POUNDS
ASBESTOS PACKING

Form 16
1000-3-45

THE PHILIP CAREY
LOCKLAND, CINCINNATI



GAF CONNECTITE



0080 3-104

MECHANICAL PACKING



“64”

DIAGONAL HIGH PRESSURE PACKING

SIZE

WEIGHT

MANUFACTURED BY
A.W. CHESTERTON CO.
BOSTON, MASS.

MECHANICAL

CHESTERTON



STYLE 326 CHES-LON PACKING

"HIGH SPEED WHITE ASBESTOS WHICH RESISTS CAUSTICS LIKE BLUE"
LOW FRICTION - HIGH SPEED - CHEMICALLY INERT

3105

0081

?

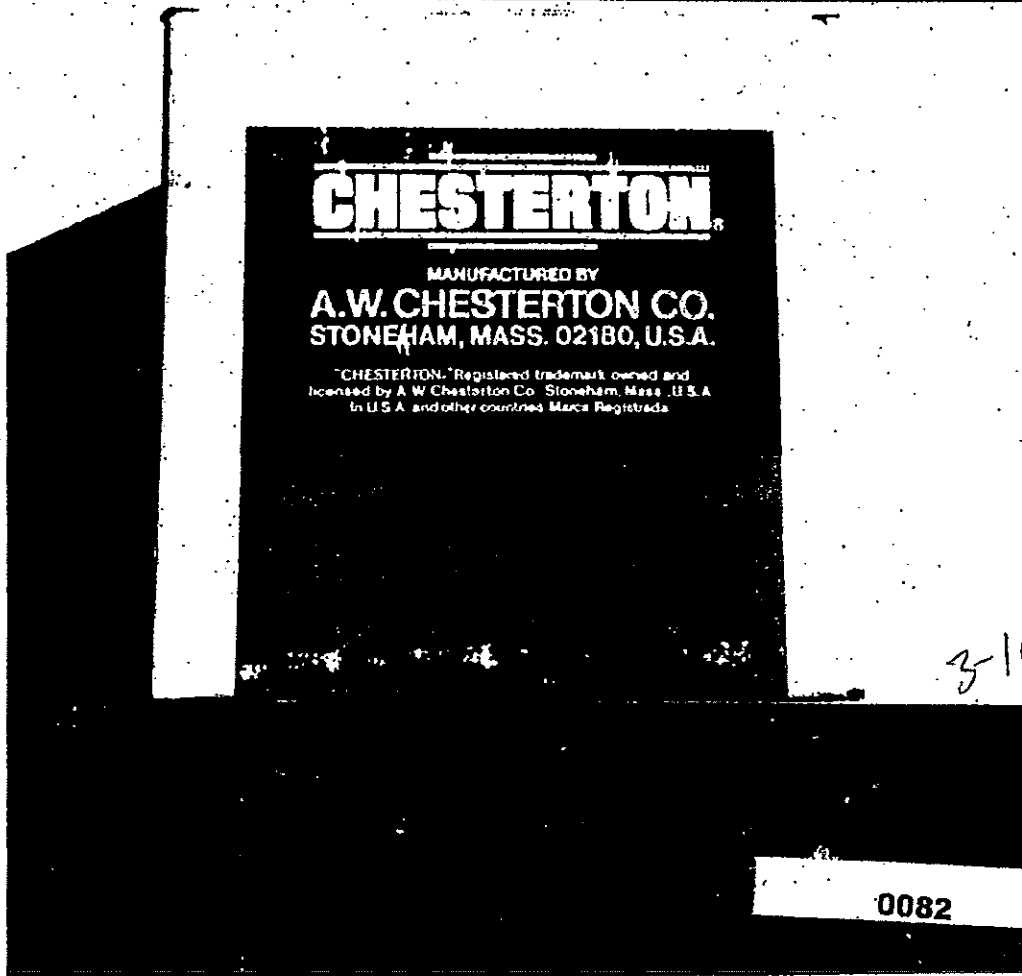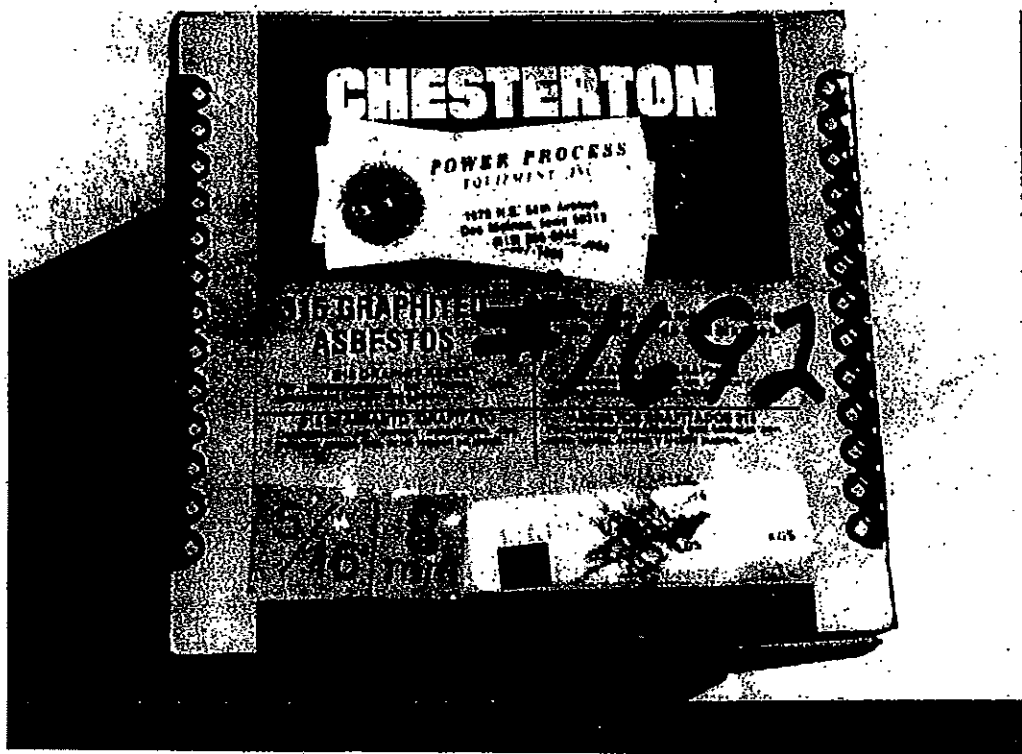

SERVICE

240 -- Same as For Style 230 above

APPROXIMATE DATA		
Weight per square inch, 1/4 inch -- .0042 lbs.		
Thickness	Length per Roll	Weight per Roll
1/4"	50 yds	310 lbs.
3/8"	17 1/2 yds	210 lbs.

Metal Abrasive Sheet is manufactured into a lined woven asbestos cloth incorporating an insertion of fine brass wire twisted into each strand for reinforcement. This sheet is treated with a special white heat-resistant which has adhesive qualities.

Style 240 is fundamentally intended for operation against high pressure steam and superheat on installations requiring a gasket with a narrow flange, or where considerable vibration is in evidence. The reinforced wire insertion renders it especially serviceable on steam cylinder heads having numerous bolt holes disproportionate to the size of the flange. Width 40".



A. W. CHESTERTON CO.

America's Oldest Manufacturer of Mechanical Packings • Est. 1884

56

A. W. Chesteron Co.

Manufacturers of



**PARACHUTE PACKING
STYLE 600**

SIZE

WT.

MECHANICAL PACKING

(See No. 1 & 3 R. C.)

3-107

0083

y

Armstrong Excelon Tile

Custom Excelon Tile

ARMSTRONG


0084

3-108



?

gaf *Sure-Stik*TM
ADHESIVE-BACKED
VINYL ASBESTOS TILE

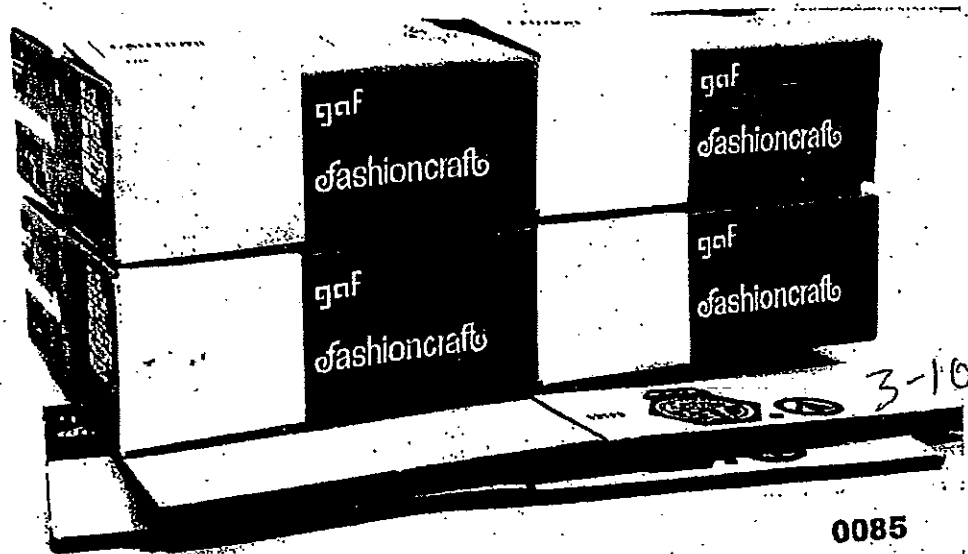

0085

?



ASBESTOS CEMENT BOARDS

NATIONAL GYPSUM COMPANY • BUFFALO, N. Y.

NO
Underwriters' Laboratories, Inc.
 LISTED
 ASBESTOS - CEMENT BOARDS
 Contents not over 1,000 Sq. Ft. Issue No. AS-67

FIRE HAZARD CLASSIFICATION
 (Based on 100 for untreated red oak)

FLAME SPREAD	0
FUEL CONTRIBUTED	0
SMOKE DEVELOPED	0

VOID

FORM 9326-B 3-1-70



COLOR-TEX

ASBESTOS-CEMENT FLAT SHEETS WITH A DURABLE
 ACRYLIC FINISH ON A FINE TEXTURED SURFACE

3-110

0086

?




PERSIAN TILE
VINYL FLOORING

CAUTION: DO NOT UNROLL WHEN COLD

ROLL NO.	PLANT NO.	DATE	QUANTITY





3-111

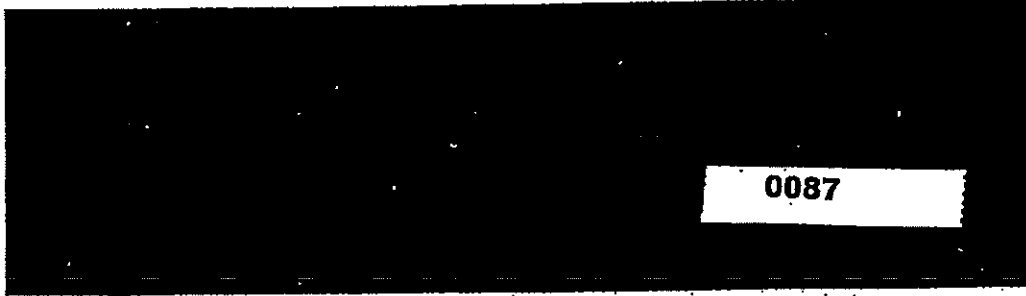


0087

?

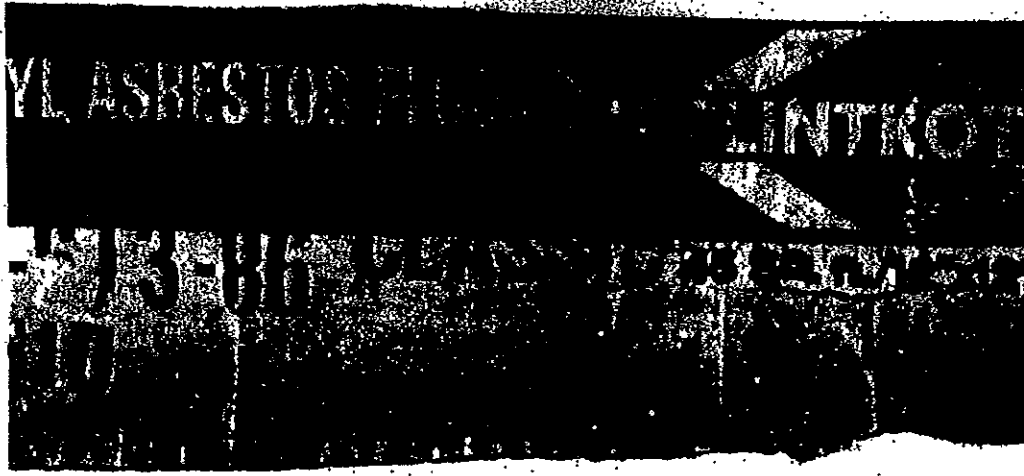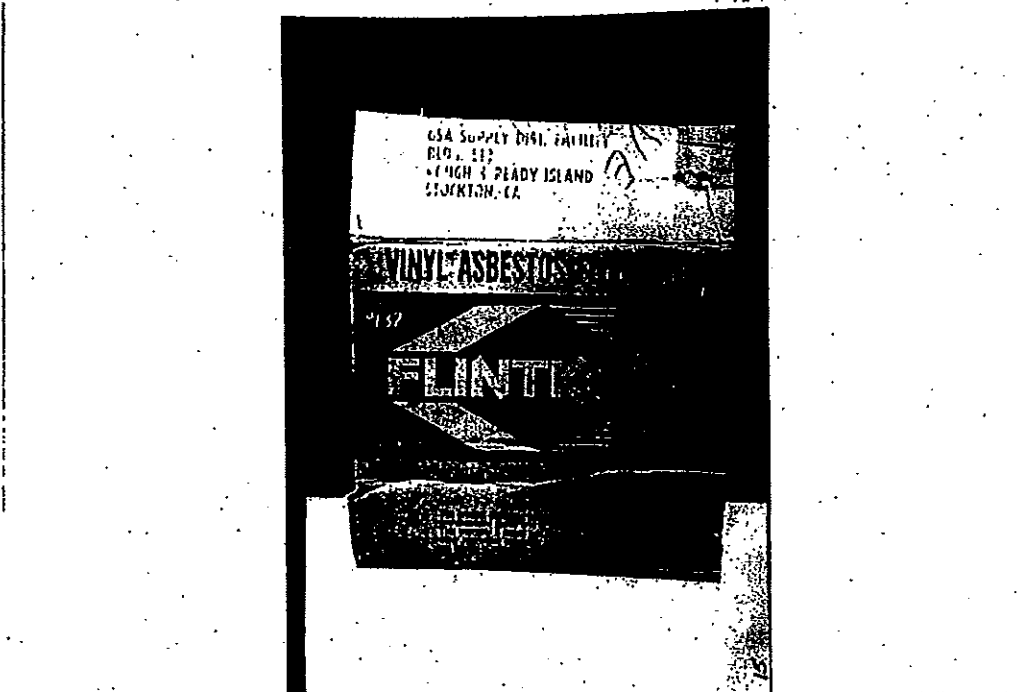


3-11-72

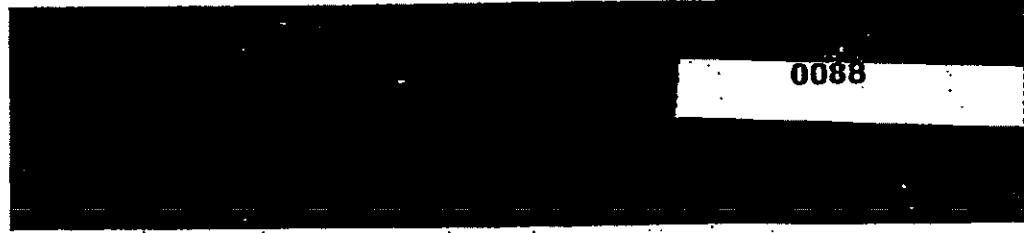

0088

?

VINYL ASBESTOS FLOOR TILE



FLINTKOTE[®] SIZE-12" X 12" 27 SQ. FEET

THE FLINTKOTE COMPANY • NEW YORK 20, N.Y.



FLINTKOTE
IS-CARE
peel and stick
REINFORCED VINYL TILE

0089

3-113

?



SKYKOTE #430 C FLINTWHITE

FIVE GALLONS

NEW YORK • LOS ANGELES • SAN FRANCISCO • PORTLAND

**DECORALT®
HEAVY DUTY SEAL COAT**

*A trademark of The Flintkote Company

USE: Decoralt® has a reputation for its heavy duty product in water proofing and sealing. It has a proven formula for long life and is used in many applications. It is used to seal masonry, concrete, and other surfaces.

For Luminous Surfaces: Use on asphalt paved walkways, decks, stairs, playgrounds, etc. to resist stains and discoloration.

For Masonry Surfaces: Use on brick, concrete, and other masonry surfaces to resist water and staining.

Supplied in white. Will cover cement gray and white.

See Flintkote Product Literature and technical data for complete technical application procedures.

MAINTAIN A CONSTANT

**KEEP CAN CLOSED
WHEN NOT IN USE**

CAUTION—KEEP FROM FREEZING

DIRECTIONS: Mix each batch carefully in clean container. Measure water and mixing thoroughly to avoid lumps.

For brush application, mix 1 part water to 2 parts DECORALT. Apply two coats with short bristle brush.

For spray application, mix 1 part water to 4 parts DECORALT. Use Flinco sprayer for proper pressure and equipment. Apply uniform thin thickness.

Total coverage should be not less than one gallon per 150 sq. ft. on non-porous surfaces and 100 sq. ft. on porous surfaces. Do not re-apply until dry.

Protect coating from rain until dry. Remove dirt or water after use. Excess material can be removed with lacquer solvent.

NOTICE: Our recommendations for the use of this product are based on experience and are believed to be reliable. However, users should consult the manufacturer's literature, especially regarding all variations, before application or use.


THE FLINTKOTE COMPANY
Industrial Division
New York 20, N. Y.

DECORALT®
HEAVY DUTY SEAL COAT

0090

114

?

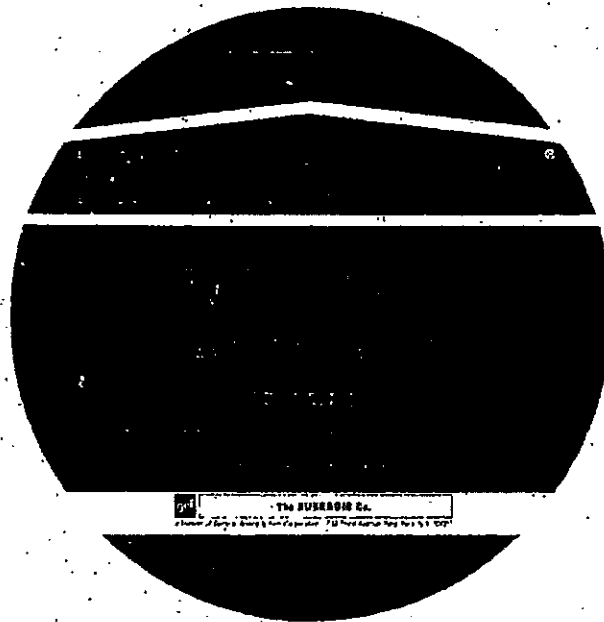

gaf

**RUBEROID
WEATHER COAT
EMULSION**

CONTENTS: BLEND OF ASPHALT, WATER, BENTONITE CLAY
AND ASBESTOS FREE

CAUTION: KEEP FROM FREEZING

NET CONTENTS 5 GALLONS

GAF Corporation, Building Products Division, 140 West 51 Street, New York, N.Y. 10020

WEATHER COAT EMULSION

(Footing Emulsion for Dead Level Roofs)

Waterproof Emulsions for
CEMENTS and COATINGS
FOR BUILT-UP ROOF COVERINGS

0091

3-115



EAGLE-PICHER

STALASTIC

THE EAGLE-PICHER COMPANY
CINCINNATI, OHIO
Since 1843

EP

051420591

0092

3-114


?



ACACOS 2





AMERICAN ASBESTOS COMPANY



Armstrong 6





CHAS. AYRES SUPPLY CO. 9




DETRICK 24

CASCO 25




Garlock 34



KAISER

J. T. THORPE & SON 40


KAYLO 42





Raybestos Manhattan 51



SACOMO MANUFACTURING CO. 53



Southern Asbestos Company 56




WESTERN ASBESTOS CO. 67

WESTERN MCKEEH & CO. 68

0093

3-117



JERRY NEIL PAUL
DEAN A. HANLEY

PAUL & HANLEY, LLP

ATTORNEYS AT LAW

SOUTHERN CALIFORNIA OFFICE
5716 CORSA AVENUE, SUITE 203
WESTLAKE VILLAGE, CALIFORNIA 91362
TELEPHONE: (818) 865-2807
FACSIMILE: (818) 865-0805
EMAIL: SoCal@PaulandHanley.com

NORTHERN CALIFORNIA OFFICE
4905 CENTRAL AVENUE, SUITE 200
RICHMOND, CALIFORNIA 94804
TELEPHONE: (510) 559-9980
FACSIMILE: (510) 559-9970
EMAIL: NorCal@PaulandHanley.com

SAN DIEGO OFFICE
12707 High Bluff Drive, Suite 100
San Diego, California 92130
Telephone: (619) 232-0131

J. BRUCE JACKSON
YOUNG S. LEE
LISA J. ESPADA
JAMES M. ANTHONY
ANNA M. COSTA
RON G. ARCHER
T. SCOTT HAMES
ROBERT L. BARROW
J. RABLOVKO
ANGELO L. BUTLER
JOSHUA B. CLARK
ASPASIA A. PAPAVALASSIOU

April 26, 2001

SENT VIA US MAIL

Jim Sumpter
2383 Cardinal Apartment #2
San Diego, CA 92123

Re: Schingle v. A.P. Green Industries, Inc., et al
SFSC Case No. 318455

Dear Sir:


This will confirm your deposition in the above-referenced case is scheduled for at at the following location:

HQ GLOBAL
8880 Rio San Diego Drive, 8th floor
San Diego, CA 92108
(619) 209-6000

I have enclosed a picture book for your review prior to your deposition. An attorney from our office will contact you a few days before your deposition via telephone to prepare for your deposition. If you haven't heard from someone by then, please feel free to call us.

Please give me a call if you cannot keep this appointment or if you have any questions.

Very truly yours,


Andrew H. Jensen
Paralegal

AHJ/
Attachments
1023



ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 08-01-2001 BY 60322 UCBAW/SMT/STP

Jim Stumpier
2383 Cardinal Apartment #2
San Diego, CA 92123

